












S N O W P L O W

# DRAG PRO 180Z

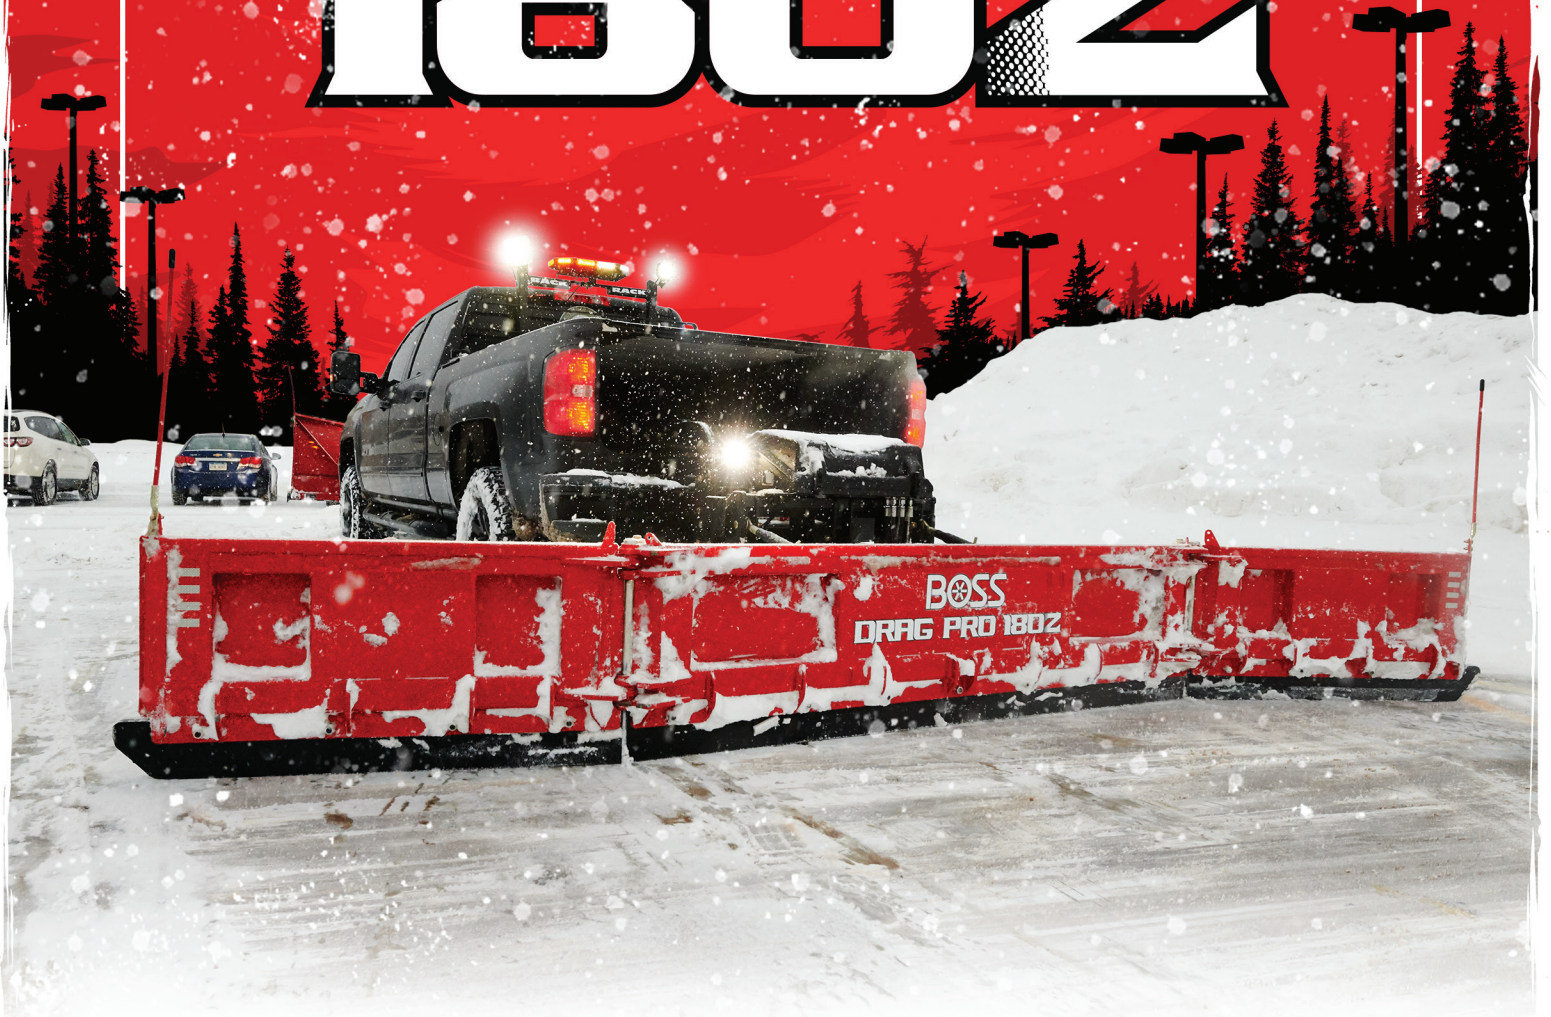

## GET YOUR REAR IN GEAR

THE MOST VERSATILE REAR-MOUNTED SYSTEM AVAILABLE, WITH MULTIPLE BLADE POSITIONS AND THE ABILITY TO PLOW FORWARD AND IN REVERSE



FORWARD

FORWARD + REVERSE



# DRAG PRO<sup>®</sup> 180Z

# THE FULLY FEATURED REAR-MOUNTED SNOWPLOW



Combine DRAG PRO<sup>®</sup> 180Z with a front-mounted plow to increase productivity and cut time on the job up to 50%

## KEY FEATURES

### 2-POINT ATTACHMENT SYSTEM



Designed for ¾- and 1-ton trucks with access to a universal fifth-wheel rail system and a receiver hitch. Installation of a standard fifth-wheel rail kit, available at most truck equipment retailers, is required. With both points of attachment (fifth-wheel rails and receiver hitch) engaged, the DRAG PRO<sup>®</sup> 180Z offers advanced stability, rigidity and reliability for performance.

### NO SHEAR PINS



The hydraulic relief feature of the 180Z actively protects the wings and blades when in contact with an obstacle—in either forward or reverse.

### FULL 180-DEGREE ROTATING WINGS



Rotating wings allow the operator to adjust quickly to various plowing situations, surface areas and job types. With advanced stability from the two-point attachment system, the operator can freely plow forward, in reverse and in the Z-position.

- **Quick Hitch System** - Based on the BOSS-patented SmartHitch<sup>®</sup> 2 attachment system, the system allows the operator to quickly and easily attach and detach the plow.
- **UHMW Cutting Edge and Curb Guards** - Make for superior scraping on any surface, improve the life of the blade and provide added blade protection to the edge of the plow.
- **Dual, Rear-Facing LED Lights** - Standard, fully integrated, rear-facing LED lights increase visibility when operating in reverse.
- **Hydraulics and Linkage Positioned Inside the Blade** - Enhanced design allows the operator to back the plow closer to structures when backdragging and removing snow.
- **Quick and Easy Control Panel Access** - Conveniently located, with a flexible draw latch, the panel allows the operator to quickly and easily access hydraulics
- **Reduce Installation Time and Labor** - With the 180Z, there's no undercarriage to install, saving installation time and labor.
- **MSRP List Price** - \$9,250 (Does not include Fifth-Wheel Rail Kit).

### SPECIFICATIONS

Feature	8' - 16' hydraulic
Width (Wings Folded - Outside Dimension)	100"
Width (Wings Extended - Outside Dimension)	16'
Wing Rotation	180 degrees
Weight	1,450 lb w/hitch system (657.7 kg)
Moldboard Height	24"
Moldboard Thickness	7-ga steel
Moldboard Cutting Edge	1¼" x 6" UHMW (3.2 cm x 15.2 cm)
Wing Cutting Edges	2¼" x 6" UHMW (7 cm x 15.2 cm)
Wing Cylinders	2¼" x 1 <sup>9</sup> / <sub>16</sub> " x 9" (7 cm x 4 cm x 22.9 cm)
Lift Cylinder	2 <sup>3</sup> / <sub>8</sub> " x 1 <sup>3</sup> / <sub>16</sub> " x 12"
Attachment System*	Fifth-wheel rails and receiver hitch (2-point attachment)
Float and D-Force <sup>®</sup>	Standard
Adjustable Raise/Lower Valve	Standard
Worklights	Standard
Truck Applications	¾- & 1-ton trucks (GVWR 8501–14000 lb). Trucks with fifth-wheel rail mounting capability only.**

\*Requires installation of fifth-wheel rail kit

\*\*Flat bed applications are limited to the following dimensions: Maximum width is 84 in. (7 ft.) / maximum bed height is 44 in.



For more information, visit [bossplow.com](http://bossplow.com).

©2020 BOSS Products. All Rights Reserved. The "f" logo is a registered trademark/service mark of Facebook, Inc. The Instagram logo is a registered service mark of Instagram, LLC. The Twitter logo is a registered trademark/service mark of Twitter, Inc. The YouTube logo is a trademark/service mark of Google LLC. The "in" logo is a registered service mark of LinkedIn Corporation. The Blogger logo is a registered service mark of Google LLC. All other trademarks belong to BOSS Snowplow.