




IRRITROL  
 5825 JASMINE ST.  
 RIVERSIDE, CA 92504  
 TOLL FREE: 1-877-345-8676  
 PHONE: (951) 785-3152  
 FAX: (951) 359-1870  
 www.irritrol.com

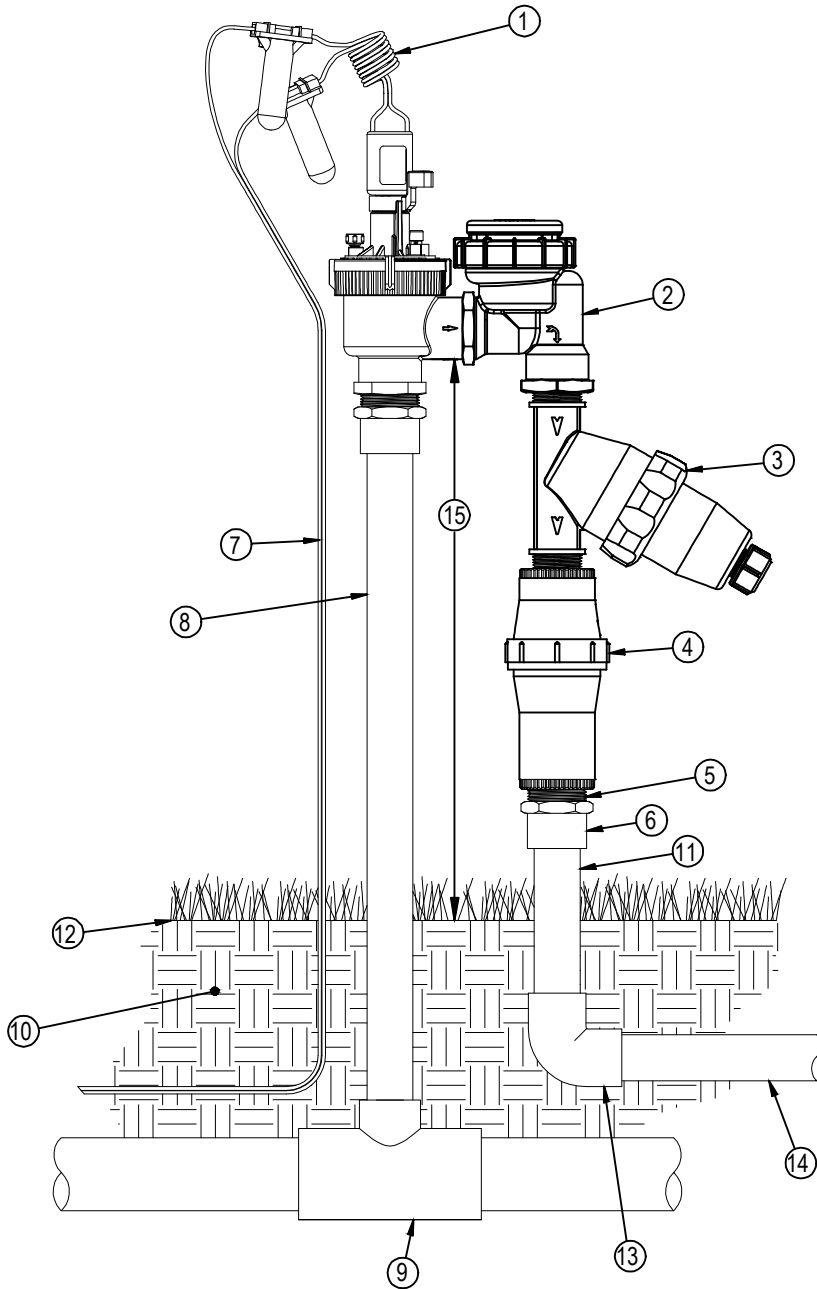

**LEGEND:**

- ① CONTROL WIRES WITH 12" SERVICE COIL AND WATER PROOF WIRE CONNECTORS, DBY OR EQUAL.
  - ② IRRITROL 2173APR AVB VALVE.
  - ③ 1" 150 MESH Y-FILTER (\*).
  - ④ 1" 30 PSI PRESSURE REGULATOR (\*).
  - ⑤ SCH 80 PVC CLOSE NIPPLE (\*).
  - ⑥ SCH 40 PVC MALE ADAPTER.
  - ⑦ CONTROL WIRES TO CONTROLLER.
  - ⑧ PVC MAINLINE PER SPECIFICATIONS.
  - ⑨ PVC MAINLINE FITTING.
  - ⑩ NATIVE SOIL PER SPECIFICATION.
  - ⑪ PVC LATERAL LINE PER SPECIFICATION.
  - ⑫ FINISH GRADE.
  - ⑬ PVC SCH 40 ELLS (SxS).
  - ⑭ LATERAL LINE TO DRIP SYSTEM.
  - ⑮ HEIGHT ABOVE GRADE PER LOCAL CODES.
- (\* ) PARTS IN DRIP ZONE KIT.

**NOTES:**

1. LOCAL STAPLES ALONG TUBING AT 4'-6" ON CENTER AND AT ALL FITTINGS (TEES, ELLS, ETC.).
2. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
3. DO NOT SCALE DRAWING.
4. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS, AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
5. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

MINIMUM FLOW RATE: 0.25 GPM  
 MAXIMUM FLOW RATE: 25 GPM

**IRRITROL DRIP ZONE KIT**  
 2713APRDK-MF