
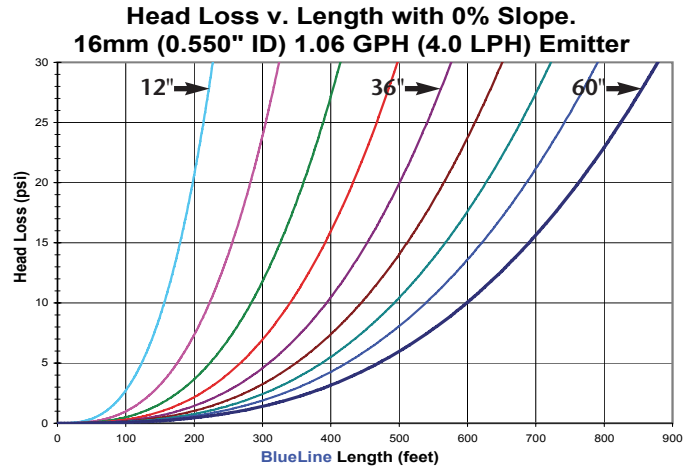
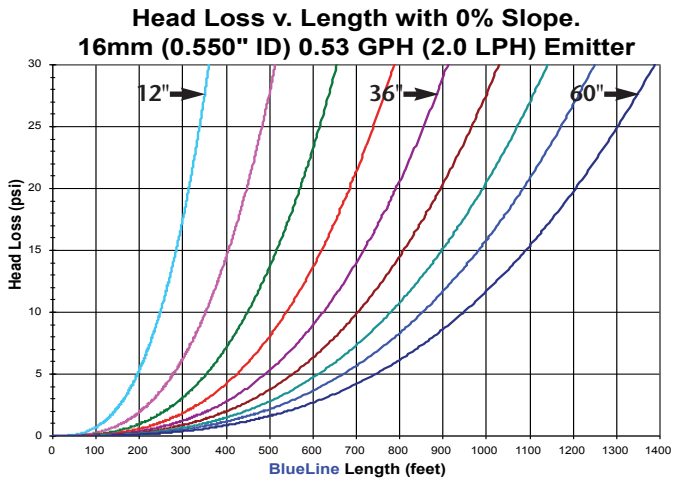
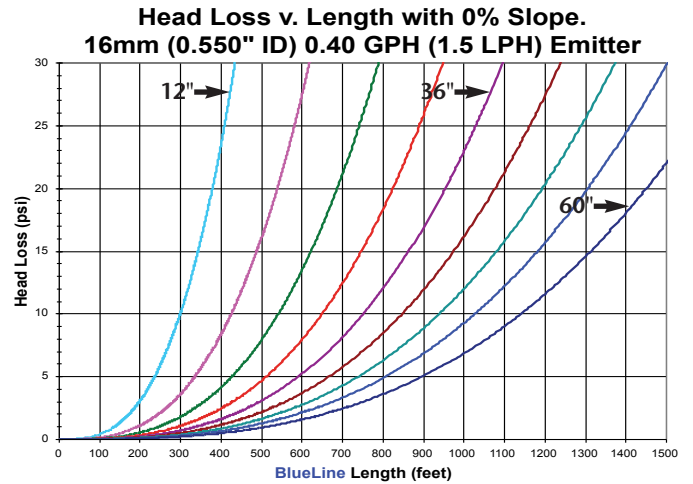


0.550" (16mm) BlueLine® PC Dripline


Spacings: 12" 18" 24" 30" 36" 42" 48" 54" 60"

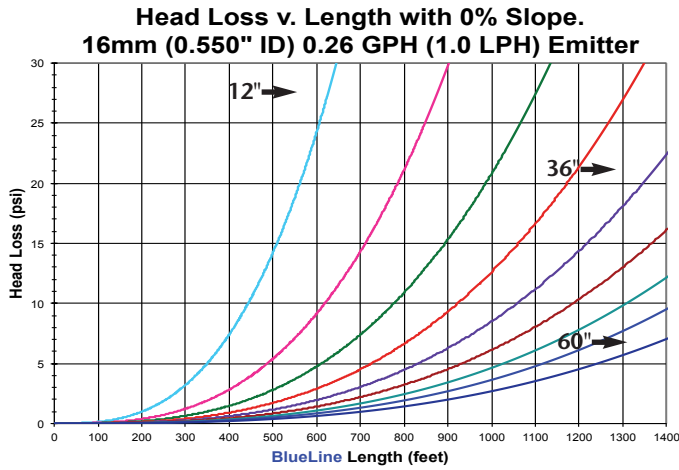

Specification:





	English Units	Metric Units
Hose Nominal ID:	0.550"	16mm
Hose Nominal Wall:	0.045"	1.14mm
Nominal Flow Rate (Q): @ 30 psi (2 bar)	0.26, 0.40, 0.53 & 1.06 GPH	1.0, 1.5, 2.0 & 4 LPH
Operating Pressure Range (P):	10 to 60 psi	0.69 to 4.14 Bar
Coefficient of Variation (Cv):	<3%	<3%
Barb Loss Factor (Kd):	0.8	0.8
Minimum Filtration:	120 mesh (125 microns) for 0.40, 0.53, 1.06 gph 150 mesh (105 microns) for 0.26 gph	120 mesh (125 microns) for 0.40, 0.53, 1.06 gph 150 mesh (105 microns) for 0.26 gph

BlueLine Emitter Discharge Rate vs. Pressure

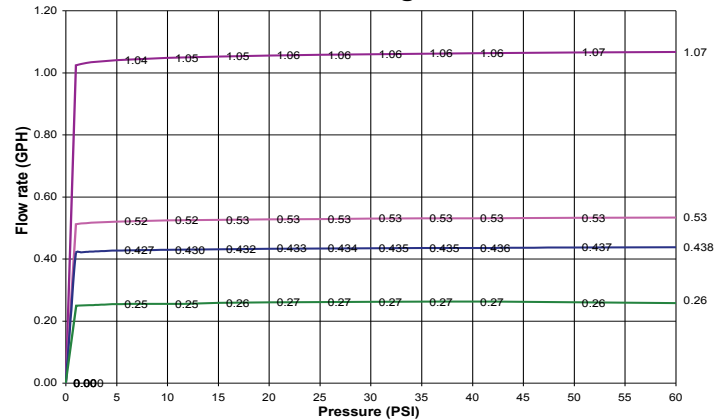


0.620" (18mm) BlueLine® PC Dripline

Spacings: 12" 18" 24" 30" 36" 42" 48" 54" 60"

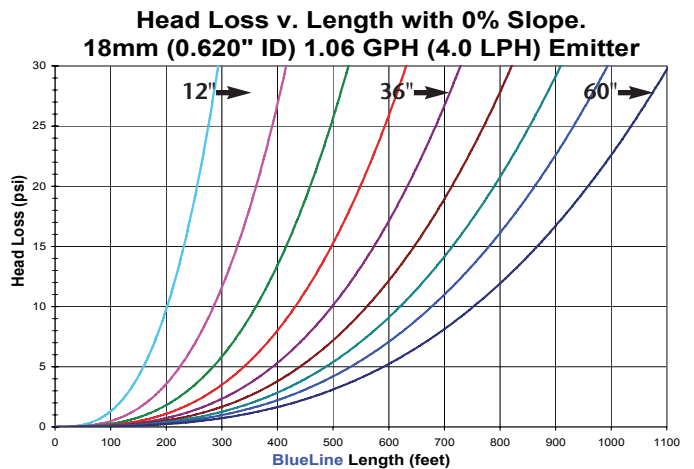
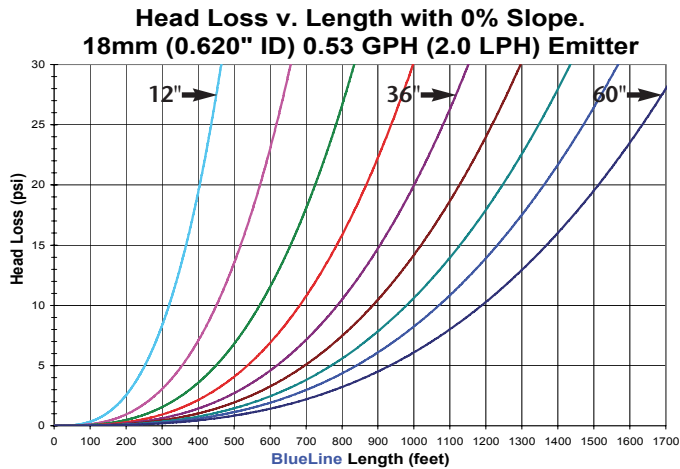
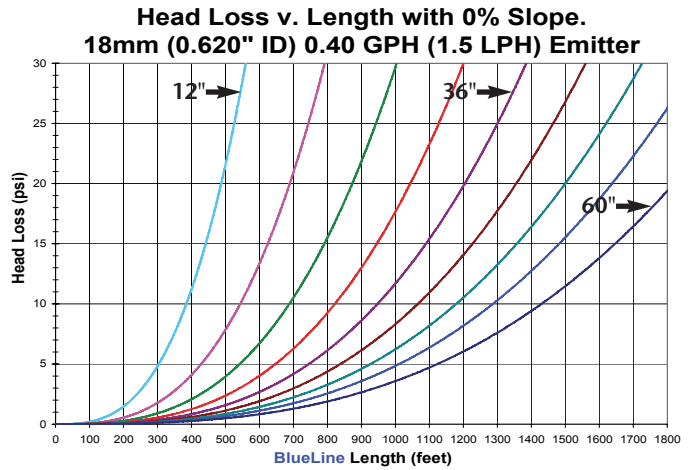
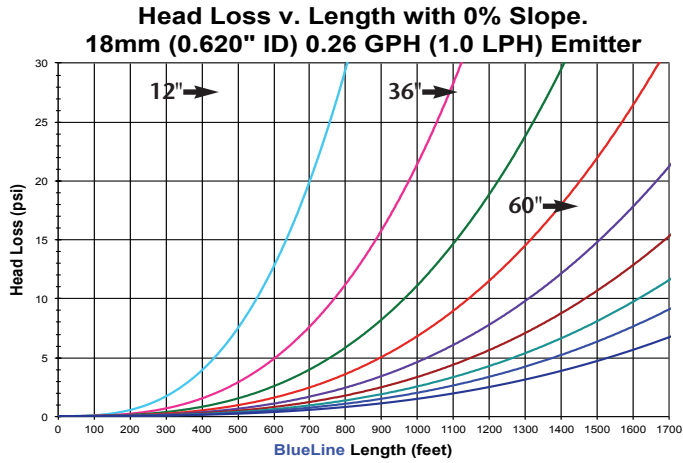


Specification:	English Units	Metric Units
Hose Nominal ID:	0.620"	18mm
Hose Nominal Wall:	0.045"	1.14mm
Nominal Flow Rate (Q): @ 30 psi (2 bar)	0.26, 0.40, 0.53 & 1.06 GPH	1.0, 1.5, 2.0 & 4 LPH
Operating Pressure Range (P):	10 to 60 psi	0.69 to 4.14 Bar
Coefficient of Variation (Cv):	<3%	<3%
Barb Loss Factor (Kd):	0.64	0.64
Minimum Filtration:	120 mesh (125 microns) for 0.40, 0.53, 1.06 gph 150 mesh (105 microns) for 0.26 gph	120 mesh (125 microns) for 0.40, 0.53, 1.06 gph 150 mesh (105 microns) for 0.26 gph

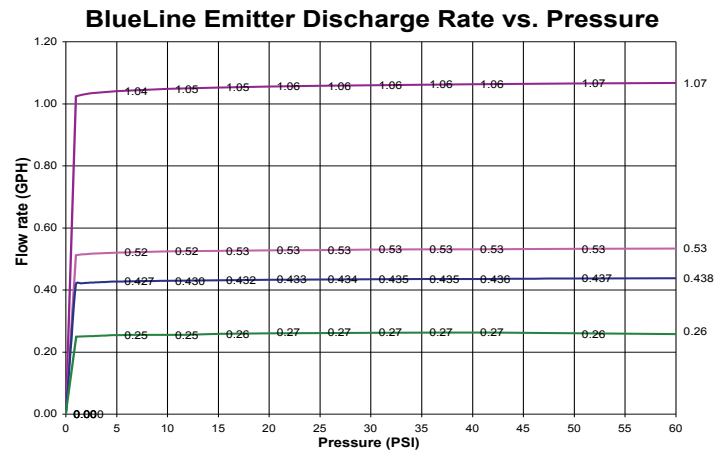

0.710" (20mm) BlueLine® PC Dripline


Spacings: 12" 18" 24" 30" 36" 42" 48" 54" 60"

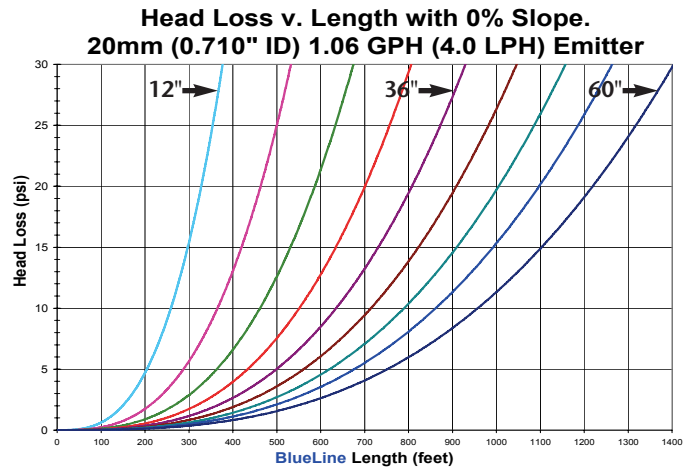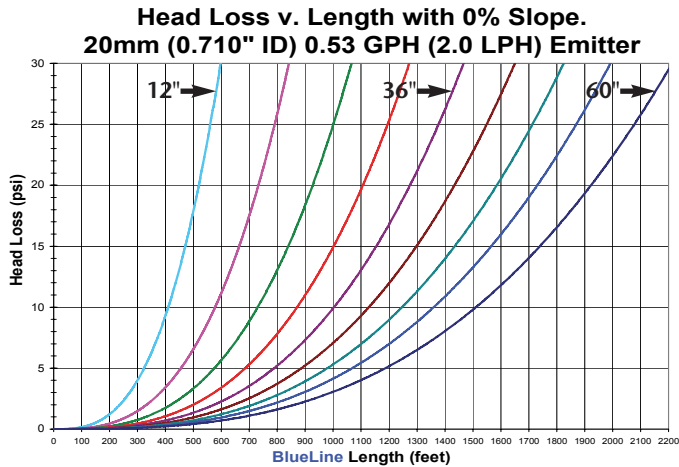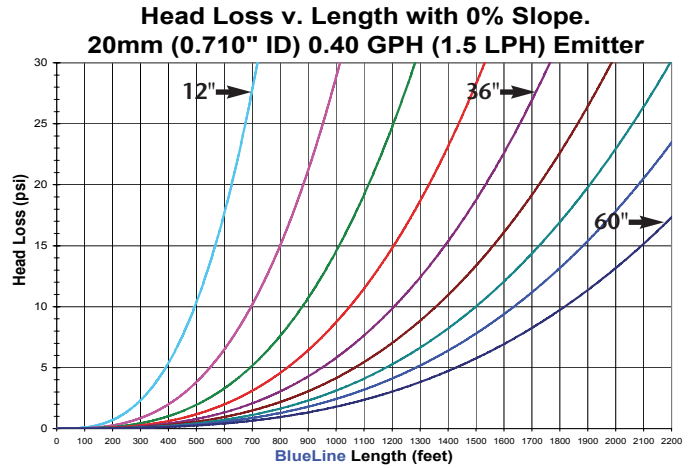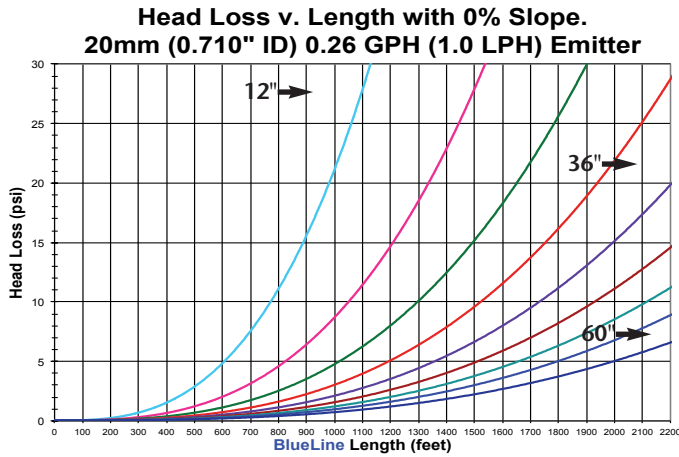

Specification:

	English Units	Metric Units
Hose Nominal ID:	0.710"	20mm
Hose Nominal Wall:	0.048"	1.14mm
Nominal Flow Rate (Q): @ 30 psi (2 bar)	0.26, 0.40, 0.53 & 1.06 GPH	1.0, 1.5, 2.0 & 4 LPH
Operating Pressure Range (P):	10 to 60 psi	0.69 to 4.14 Bar
Coefficient of Variation (Cv):	<3%	<3%
Barb Loss Factor (Kd):	0.27	0.27
Minimum Filtration:	120 mesh (125 microns) for 0.40, 0.53, 1.06 gph 150 mesh (105 microns) for 0.26 gph	120 mesh (125 microns) for 0.40, 0.53, 1.06 gph 150 mesh (105 microns) for 0.26 gph

BlueLine Emitter Discharge Rate vs. Pressure

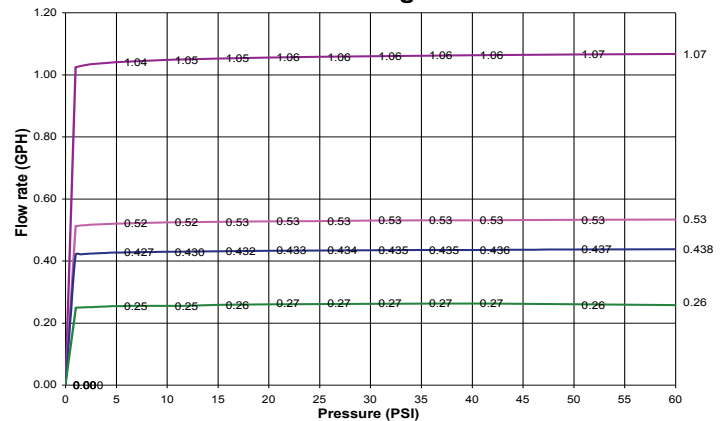

©2016 The Toro Company
 Micro-Irrigation Business
 1588 N. Marshall Avenue, El Cajon, CA 92020-1523, USA
 Tel: +1 (800) 333-8125 or +1 (619) 562-2950
 Fax: +1 (800) 892-1822 or +1 (619) 258-9973

toro.com

ALT106 05/16

