



TORO®

SWEET SPOT™ DRIP TAPE




AVAILABLE IN **AQUA-TRAXX® AZUL™**

5/8" ID

6/8" ID
"SWEET SPOT"

7/8" ID

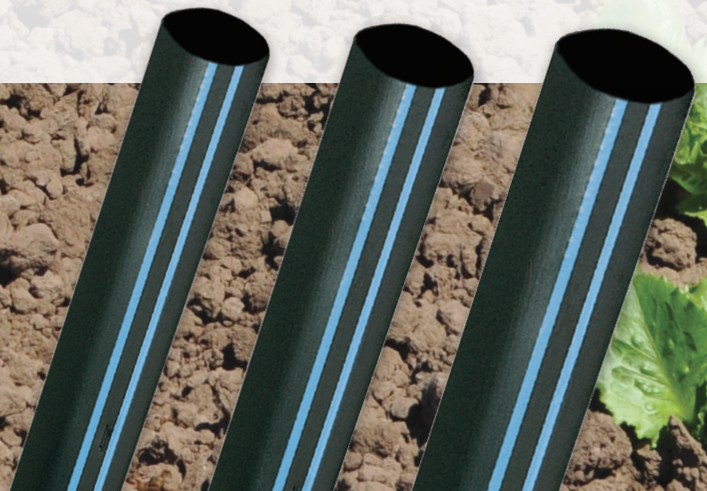

SWEET SPOT™



AVAILABLE IN **AQUA-TRAXX® AZUL™**

LONGER RUNS, **LOWER COST**

With Toro's new 6/8" ID Aqua-Traxx® drip tape, Sweet Spot™, growers get the perfect tape to split the difference between 5/8" ID and 7/8" ID tape – enabling growers to achieve longer runs than 5/8" tape and lower costs than 7/8" tape. Not only is Toro the only manufacturer of 6/8" drip tape, but Toro is also the only provider of 6/8" fittings to support these unique, cost-saving applications.



BENEFITS OF SWEET SPOT DRIP TAPE:

LONGER RUNS COMPARED TO 5/8":

- Better Uniformity
- Lower system cost from less layflat, connections, & labor

LESS EXPENSIVE THAN 7/8":

- Fewer pounds of plastic per acre
- More environmentally friendly
- More water savings due to less runoff

6/8" FITTINGS ONLY AVAILABLE FROM TORO



SWEET SPOT™ PRODUCT SPECIFICATIONS

AQUA-TRAXX® & AQUA-TRAXX AZUL™ FLOW RATES													
Emitter Flow Part Number		Outlet Spacing		Emitter Flow Rate				Q-100				Emitter Exponent	Filtration Requirement
				gph		lph		gpm/100 ft		lph/1 meter			
		in	cm	@ 8 psi	@ 10 psi	@ 0.55 bar	@ 0.7 bar	@ 8 psi	@ 10 psi	@ 0.55 bar	@ 0.7 bar		
AQUA -TRAXX ULTRA LOW FLOW	0.07 gph emitter												
	EAXxx0817	8	20	0.07	0.08	0.26	0.30	0.17	0.20	1.30	1.47	0.55	200 (74)
	EAXxx1609	16	40	0.07	0.08	0.26	0.30	0.09	0.10	0.65	0.74		
	0.09 gph emitter												
	EAXxx0822	8	20	0.09	0.10	0.34	0.38	0.22	0.25	1.66	1.88	0.55	200 (74)
	EAXxx1611	16	40	0.09	0.10	0.34	0.38	0.11	0.13	0.83	0.94		
	0.10 gph emitter												
	EAXxx0825	8	20	0.10	0.11	0.38	0.43	0.25	0.28	1.86	2.11	0.55	200 (74)
	EAXxx1613	16	40	0.10	0.11	0.38	0.43	0.13	0.14	0.93	1.05		
AQUA -TRAXX AZUL™	0.13 gph emitter												
	EAXxx0467	4	10	0.13	0.15	0.51	0.57	0.67	0.75	4.99	5.58	0.5	120 (125)
	EAXxx0644	6	15	0.13	0.15	0.51	0.57	0.44	0.50	3.33	3.72		
	EAXxx0834	8	20	0.13	0.15	0.51	0.57	0.34	0.37	2.50	2.79		
	EAXxx1222	12	30	0.13	0.15	0.51	0.57	0.22	0.25	1.66	1.86		
	EAXxx1617	16	40	0.13	0.15	0.51	0.57	0.17	0.19	1.25	1.40		
	EAXxx1814	18	45	0.13	0.15	0.51	0.57	0.14	0.17	1.11	1.24		
	EAXxx2411	24	60	0.13	0.15	0.51	0.57	0.11	0.12	0.83	0.93		
	0.20 gph emitter												
	EAXxx04100	4	10	0.20	0.22	0.76	0.85	1.00	1.12	7.47	8.36	0.5	120 (125)
	EAXxx0667	6	15	0.20	0.22	0.76	0.85	0.67	0.75	4.99	5.58		
	EAXxx0850	8	20	0.20	0.22	0.76	0.85	0.50	0.56	3.74	4.18		
	EAXxx1234	12	30	0.20	0.22	0.76	0.85	0.34	0.37	2.50	2.79		
	EAXxx1625	16	40	0.20	0.22	0.76	0.85	0.25	0.28	1.87	2.09		
	EAXxx1822	18	45	0.20	0.22	0.76	0.85	0.22	0.25	1.67	1.86		
	EAXxx2417	24	60	0.20	0.22	0.76	0.85	0.17	0.19	1.25	1.40		
	0.27 gph emitter												
	EAXxx04134	4	10	0.27	0.30	1.01	1.13	1.34	1.50	9.99	11.16	0.5	120 (125)
	EAXxx0690	6	15	0.27	0.30	1.01	1.13	0.90	1.00	6.66	7.44		
	EAXxx0867	8	20	0.27	0.30	1.01	1.13	0.67	0.75	4.99	5.58		
	EAXxx1245	12	30	0.27	0.30	1.01	1.13	0.45	0.50	3.33	3.72		
	EAXxx1634	16	40	0.27	0.30	1.01	1.13	0.34	0.37	2.50	2.79		
	EAXxx1830	18	45	0.27	0.30	1.01	1.13	0.30	0.33	2.22	2.48		
	EAXxx2422	24	60	0.27	0.30	1.01	1.13	0.22	0.25	1.67	1.86		
AQUA -TRAXX	0.15 gph emitter												
	EAXxx0650	6	15	0.15	0.17	0.57	0.63	0.50	0.56	3.73	4.17	0.5	140 (105)
	EAXxx1225	12	30	0.15	0.17	0.57	0.63	0.25	0.28	1.86	2.08		
	EAXxx1817	18	45	0.15	0.17	0.57	0.63	0.17	0.19	1.24	1.39		
	0.34 gph emitter												
	EAXxx04168	4	10	0.34	0.37	1.27	1.42	1.68	1.87	12.48	13.95	0.5	120 (125)
	EAXxx06112	6	15	0.34	0.37	1.27	1.42	1.12	1.25	8.33	9.31		
	EAXxx0884	8	20	0.34	0.37	1.27	1.42	0.84	0.94	6.24	6.98		
	EAXxx1256	12	30	0.34	0.37	1.27	1.42	0.56	0.62	4.16	4.65		
	EAXxx1642	16	40	0.34	0.37	1.27	1.42	0.42	0.47	3.12	3.49		
	EAXxx1838	18	45	0.34	0.37	1.27	1.42	0.38	0.42	2.78	3.10		
	EAXxx2428	24	60	0.34	0.37	1.27	1.42	0.28	0.31	2.08	2.33		
	0.53 gph emitter												
	EAXxx04265	4	10	0.53	0.59	2.01	2.24	2.65	2.96	19.75	22.08	0.5	120 (125)
	EAXxx08133	8	20	0.53	0.59	2.01	2.24	1.33	1.48	9.87	11.04		
	EAXxx1288	12	30	0.53	0.59	2.01	2.24	0.88	0.99	6.58	7.36		
	EAXxx1666	16	40	0.53	0.59	2.01	2.24	0.66	0.74	4.94	5.52		
	EAXxx2444	24	60	0.53	0.59	2.01	2.24	0.44	0.49	3.29	3.68		
EAXxx3629	36	90	0.53	0.59	2.01	2.24	0.29	0.33	2.19	2.45			

KEY

PART NUMBER: EA 5 05 04 67 - 1300

EA = Aqua-Traxx

5 = Diameter (inch)

05 = Mil Thickness

04 = Emitter Spacing (inch)

67 = Flow Rate (gph/100)

1300 = Reel Length (feet/10)

*X denotes the diameter: 5 for 5/8", 7 for 7/8", 8 for 1", 9 for 1 1/8" and 11 for 1 3/8"

**xx denotes mil thickness.

***1" only available in 13 mil

Metric outlet spacing expressed in nominal length.

Coefficient of Variation (Cv) Less than 3%.

†While operating or flushing, pressures within laterals are not to exceed maximum pressure specification.

**Sweet Spot
available in all
Aqua-Traxx &
Aqua-Traxx Azul
flow rates.**


SWEET SPOT™ WALL THICKNESS

Diameter	Wall Thickness	Pressure				Reel Length		Reel Weight	
		psi		bar					
		min	max	min	max	ft	meters	lbs	kg
6/8" (XXmm) 0.750"	5 mil	4	10	0.3	0.7	12,000	3,658	69	31
	6 mil	4	11	0.3	0.76	8,800	2,682	61	28
	8 mil	4	15	0.3	1.0	6,600	2,011	59	27

LENGTH OF RUN CHART (IN FEET)

5/8" 6/8" 7/8"

- Inlet Pressure = 10 psi
- Slope = 0%
- EU = 90

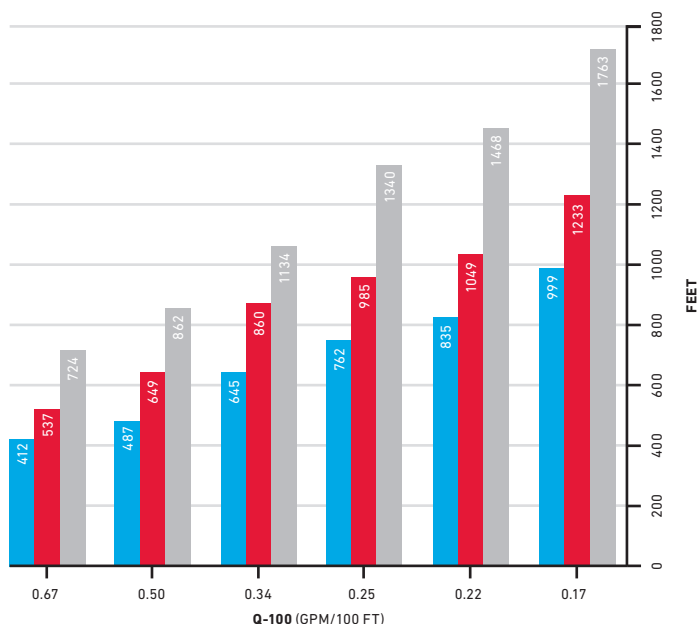



WHEN WE SAY **COUNT ON IT**, WE MEAN IT

With an expanding population, growers around the world are looking to technologies that help increase productivity of existing land and maximize precious water resources. Toro's drip irrigation solutions help growers of permanent, field and row crops around the world realize substantial benefits in yield, quality, and water savings from the precise application of water and nutrients.

Visit **toro.com** or call **(877) 373-0087** for more information or to find your local Toro dealer. Visit **driptips.toro.com** to learn more about drip irrigation and how it can help your farm.

© 2020 The Toro Company.
All Rights Reserved. Printed in the USA.

Toro Ag
1588 N. Marshall Avenue
El Cajon, CA 92020-1523, USA
Tel: + (877) 373-0087 or + 1 (619) 596-2495
Fax: +1 (800) 892-1822 or + 1 (619) 258-9973
toro.com



Ag

ALT330
09/20

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your dealer for details on all our warranties.