

Applications: In-line control filter


Standard Characteristics:

- Filter element:** - Stainless Steel screen AISI 316, supported by a PVC cylinder
- Available filtration grade:** from 80 micron
- Filter housing construction material:** Carbon Steel ST37.2
- Pre-treatment:** sand blasting up to Sa 2.5 grade
- Exterior & Interior coating:** electrostatic oven baked polyester-epoxy powder coating with a thickness of 150-200 micron
- Connections:** Victaulic, Threaded socket and Flange
- Maximum pressure:** 10 bar (145 psi)
- Maximum recommended working pressure:** up to 8 bar (116 psi).
- Optional:** automatically controlled drainage valve (programmed by time)


Operation

The water enters the filter through a plate with four or six (4 or 6) angular holes, directing the flow in a circular pattern along the length of the filter element. The water flows through the screen element openings while solid particles are collected at the lower section of the filter. These particles can be easily removed by opening the drain valve for a short period of time. The filters are supplied with 4-6 plugs enabling the user to adjust the number of holes to suit the filtering flow rate.


Model	In/Out ØD (in)	ØD1 (in)	X (mm) (in)		H (mm) (in)		H1 (mm) (in)		L (mm) (in)		L1 (mm) (in)		Shipping Weight (kg) (lb)		Packaging Vol.		Maximum	
															LxWxH (m3) (ft3)	Flow Rate (m ³ /h) (GPM)		
F415	1.5	6	360	14.2	419	16.5	426	16.8	520	20.5	528	20.8	14.5	32	0.6x0.4x0.3	2.1x1.4x0.9	3-10	13-44
F420	2	6	415	16.3	459	18.1	509	20.0	574	22.6	622	24.5	15.5	34	0.6x0.4x0.3	2.1x1.4x0.9	11-28	48-123
F430	3	6	490	21.3	519	20.4	638	25.1	641	25.3	765	30.1	29.9	66	0.7x0.6x0.3	2.2x1.8x0.9	12-39	53-172
F440	4	8	550	21.7	582	22.9	789	31.1	726	28.6	933	36.7	43.6	96	0.8x0.6x0.3	2.8x2.1x1.1	18-70	80-308
F460	6	12	910	35.8	782	30.8	1092	43.0	980	38.6	1397	55.0	117	258	1.2x0.8x0.4	4.1x2.5x1.5	31-210	136-925
F480	8	16	950	37.4	832	39.4	1407	55.4	1176	50.4	1893	74.5	190	419	1.3x0.9x0.7	4.1x3.1x2.1	163-299	720-1320
F410	10	16	950	37.4	1110	43.7	1920	75.6	1365	53.7	2210	87.0	210	463	1.3x0.9x0.7	4.1x3.1x2.1	270-500	1189-2202



Modelo: F415 - F430




Modelo: F440-F460




Modelo: F480-F410

Components Description & Spare Parts ordering information


Description		Model					
Filter Dimension		F415 4"	F420 6"	F430 6"	F440 6"	F460 8"	F480 10"
1	Filter body	N/A	N/A	N/A	N/A	N/A	N/A
2	Tightening Handle	E6020106000	E6020106000	E6020106000	E6020106000		
3	Tightening bracket	6012006000-P	6012006000-P	6012006000-P	6012108000-P		
4	Cover	W5234202001-01P	W5234202001-01P	W5234202001-01P	W5320010800-01P	W5331011200-01P	W5331011603-01P
5	Cover gasket	5312140100-180	5312140100-180	5312140100-180	5312160100-170	5312225100-433	5311450100
6	Fine Screen	W5002600402-01	W5003600404-01	W5003600405-01	W5004600403-01	W5005600402-01	E7007603000-01
6.1	Fine Screen PVC						E7007603000-01
6.2	Flushing Chamber Adaptor						5007601001
6.3	Flushing Chamber Plate						5023610700
6.4	Flushing Chamber PVC						E5007601100-01
7	Screen Gasket	5312140100-290	5312140100-190	5312140100-190	5312160100-160	5312225100-434	4081291100-452
8	Circulating Plate PVC	5024610200	5024610300	5024610300	5024610400	5024610500	E5024610700-01
8.1	Circulating Plate PVC						W5024610700-01
8.2	O-RING						4081266100-450
9	Rubber Plug for Circ. Plate	5312010100-220	5312021100-230	5312021100-230	5312023100-240	5312000100-430	E6076204900-01
9.1	PVC Plug for Circulating Plate						6076204900
9.2	O-RING						4081040100-223
10	Ball Valve	4504007100-01	4504007100-01	4504007100-01	4504007100-01	4504020100-01	4504020100-01
11	Pressure Testing Port	E5412023901-01	E5412023901-01	E5412023901-01	E5412023901-01	E5412023901-01	E5412023901-01
12	Bolt Hex. Galvanized					4102160301-070	5292183007-073
13	Washer Galvanized					4122160301	4122180402
14	Nut					4112160301	4112180301



Model: F415, F420, F430

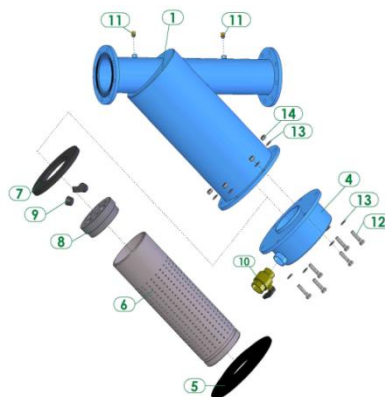


Model: F440, F460

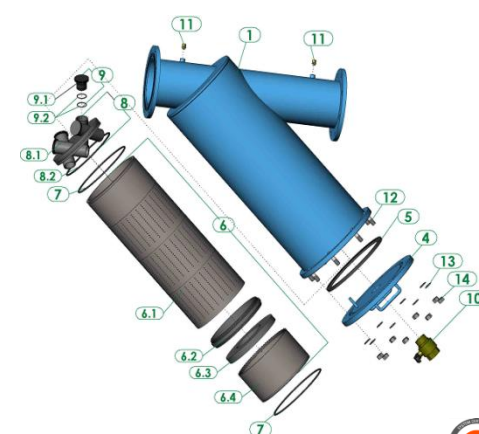


Model: F480

Pressure loss at 120 micron


Model F415

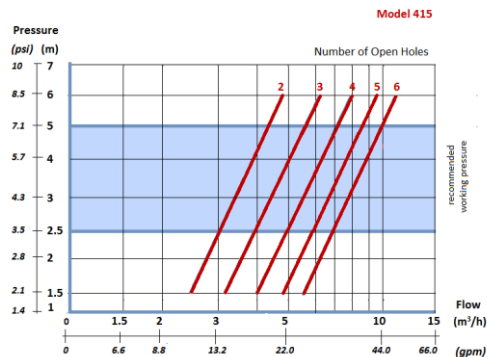


Model F420

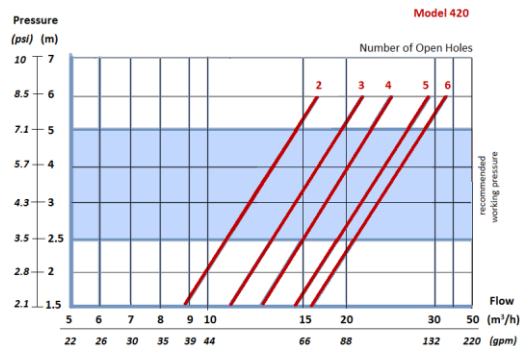


Model F430

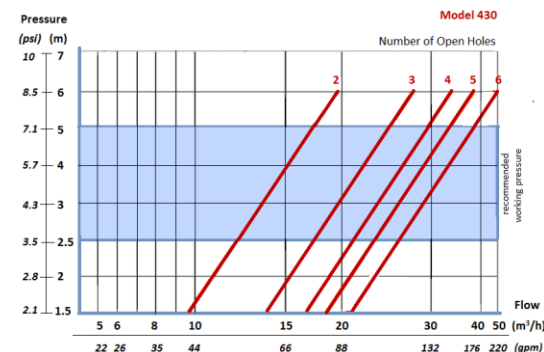


Model F440

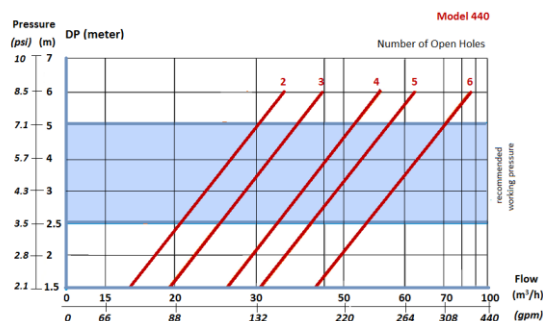


Model F460

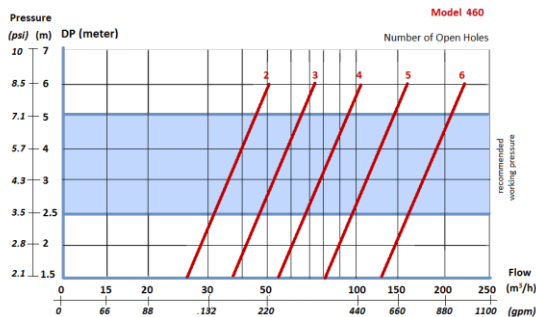


Model F480

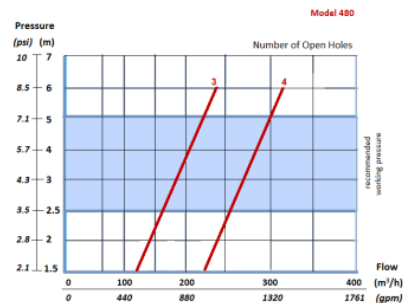

Model F410

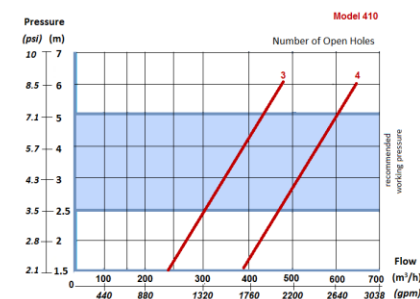

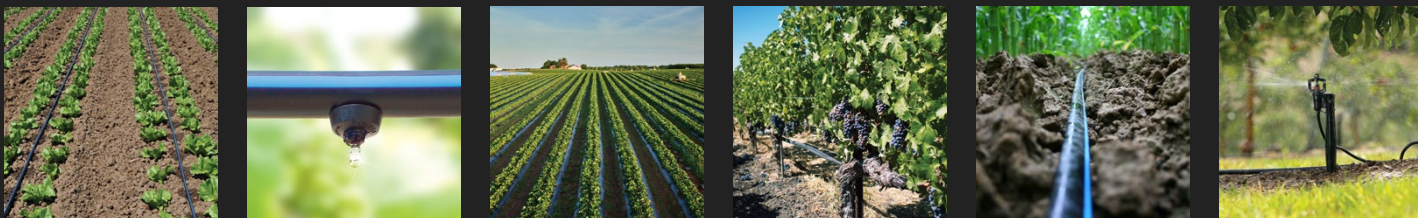

WHEN WE SAY **COUNT ON IT**, WE MEAN IT

With an expanding population, growers around the world are looking to technologies that help increase productivity of existing land and maximize precious water resources. Toro's drip irrigation solutions help growers of permanent, field and row crops around the world realize substantial benefits in yield, quality, and water savings from the precise application of water and nutrients.

Visit toro.com or call (877) 373-0087 for more information or to find your local Toro dealer.
Visit driptips.toro.com to learn more about drip irrigation and how it can help your farm.

**TORO®**

Count on it.

© 2020 The Toro Company.
All Rights Reserved. Printed in the USA.

Ag Business
1588 N. Marshall Avenue
El Cajon, CA 92020-1523, USA
Tel: +1 (877) 373-0087 or +1 (619) 596-2495
Fax: +1 (800) 892-1822 or +1 (619) 258-9973
toro.com | driptips.toro.com

ALT295
01/20

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your dealer for details on all our warranties.