

FieldCombo[™] 770

SYNTHETIC TURF GROOMER

FEATURES

- Superior Decompacting of Synthetic Turf Fields – decompact infill, incorporate infill or lightly groom the field surface; or complete all three tasks in a single pass
- Multiple Brush Attachment Options angled in, angled out or all straight to achieve the results you desire
- Modular Design easily remove brush assembly if desired
- Spring Tine Depth Set By Field Manager – provides consistent results, not reliant on tow vehicle setting
- Large Working Width 77" (195.5 cm) for efficient operation, and can be easily towed by most tractors or utility vehicles



The One Tool For All Your Synthetic Turf Grooming Needs.


To brush, loosen and decompact the hardest infill, the Bullseye FieldCombo 770 is equipped with a variety of customizable tools to meet your needs. Two rows of steel spring tines gently lift and break up compacted areas while effectively mixing and softening any infill material. Used separately with spring tines raised, or in combination, the rear poly-brushes straighten and lift the turf fibers leaving them plush and upright for an improved playing surface and an exceptional field appearance. An optional magnet adds to its functionality and quickly installed drawbar kit allows even more tow vehicle options.





FieldCombo[™] 770[°]

To brush, loosen and decompact the hardest infill, the Bullseye FieldCombo 770 is equipped with a variety of customizable tools to meet your needs. Two rows of steel spring tines gently lift and break up compacted areas while effectively mixing and softening any infill material. Used separately with spring tines raised, or in combination, the rear poly-brushes straighten and lift the turf fibers leaving them plush and upright for an improved playing surface and an exceptional field appearance. An optional magnet adds to its functionality and quickly installed drawbar kit allows even more tow vehicle options.

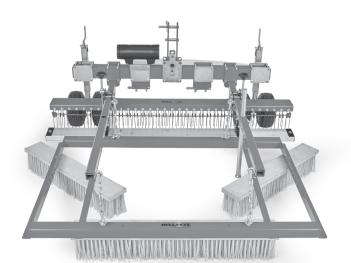

	BULLSEYE FIELDCOMBO 770, MODEL 46420
WORKING WIDTH	77" (195.5 cm)
DECOMPACTING DEPTH	0 - 1.38" (0 - 35 mm), infinitely adjustable
VEHICLE REQUIREMENT	Tractor with minimum 18 hp (13.4 kw), a category 1, 3-point hitch or Workman MDX utility vehicle or equivalent, using drawbar hitch kit, model 46421
NUMBER OF SPRING TINES	Two rows of 66 (132 total)
SPRING TINE SPACING	0.59" (15 mm)
WEIGHT	495 lbs. (225 kg)
DIMENSIONS	Width 85" (215.9 cm) Height 35" (88.9 cm) Length 78.5" (199.3 cm)
WARRANTY	One-year limited warranty. Refer to the Operator's Manual for further details.

	BULLSEYE FIELDCOMBO 770 ACESSORIES
DRAWBAR HITCH KIT	Allows operation with a Workman MDX utility vehicle or equivalent, model 46421
MAGNET KIT	Mounts directly behind spring the tines for removal of metal debris, model 46422

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in design, required attachments and safety features. Consult your local Toro Distributor.

