



NuSurface™ 470/790

MULTI-PURPOSE TURF RENOVATION


FEATURES

- Cost Effective, Multi-Purpose Turf Renovation – *verti-cut, flail mow or fraise mow and clean up in single pass*
- Operating Width Options – *47" or 79" (119 or 200 cm)*
- Multi-Purpose Blade Rotor – *simple blade change to switch between fraise or flail mow and verti-cut*
- Adjustable Height Conveyor – *works with most trailers or dump boxes*
- Full Width Front and Rear Rollers – *easily adjust depth and level machine on all four corners*
- Easy Access to Blade Area – *simplifies blade changes and cleaning*



Highly Effective, Single-Pass Turf Renovation.


The Bullseye NuSurface 470 & 790 are used to fraise mow, flail mow, level, de-thatch, and renovate turf areas, as well as harvest sprigs. These products are ideal for use on golf courses and sports fields and are quickly becoming the go-to grass removal tool for fast and efficient resurfacing projects. It's rotary action removes material and transfers it onto a conveyor system for disposal, leaving behind a smooth surface, immediately ready for sod or seeding. These machines are highly productive and can be adjusted in small increments for the desired level of aggressiveness. Rather than swapping out the entire blade mount rotor to change mowing operations, a cost effective optional verti-cut blade set is easily installed to replace the standard fraise/flail mowing blade set.

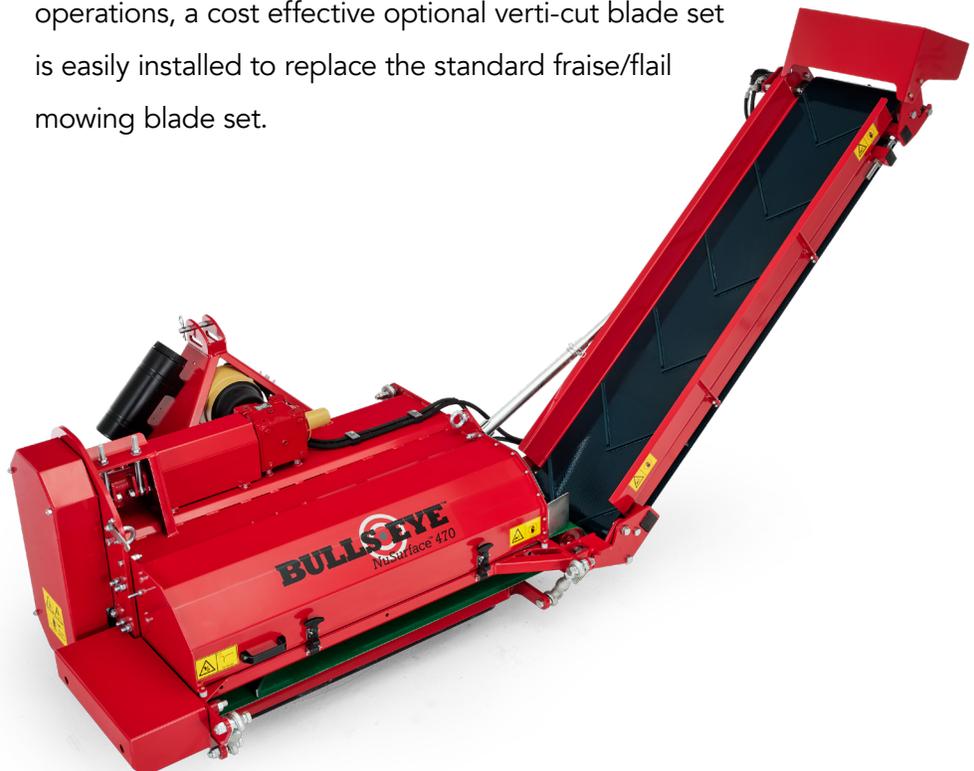



NuSurface™ 470/790*

The Bullseye NuSurface 470 & 790 are used to fraise mow, flail mow, level, de-thatch, and renovate turf areas, as well as harvest sprigs. These products are ideal for use on golf courses and sports fields and are quickly becoming the go-to grass removal tool for fast and efficient resurfacing projects. It's rotary action removes material and transfers it onto a conveyor system for disposal, leaving behind a smooth surface, immediately ready for sod or seeding. These machines are highly productive and can be adjusted in small increments for the desired level of aggressiveness. Rather than swapping out the entire blade mount rotor to change mowing operations, a cost effective optional verti-cut blade set is easily installed to replace the standard fraise/flail mowing blade set.

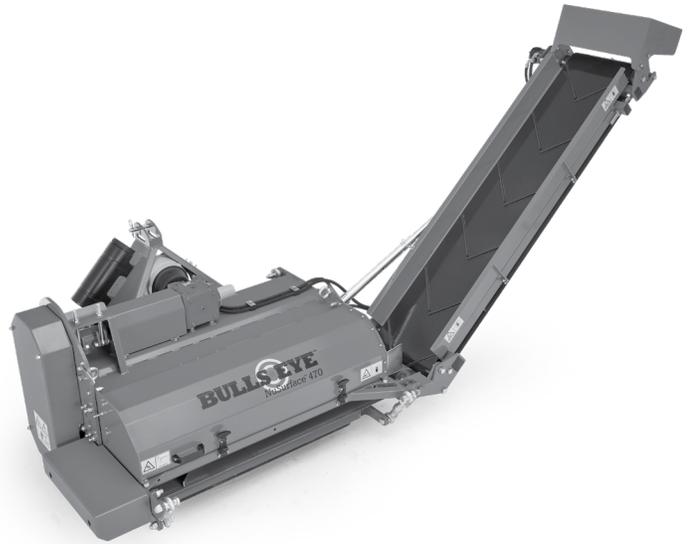

	BULLSEYE NUSURFACE 470, MODEL 46450	BULLSEYE NUSURFACE 790, MODEL 46452
WORKING WIDTH	47" (119 cm)	79" (200 cm)
WORKING DEPTH	Up to 2" (50.8 mm)	
TRACTOR REQUIRED	30-40 hp (22.4-29.8 kW) with minimum 1,709 lb. (775 kg) lift capacity	40-50 hp (29.8-37.3 kW) with minimum 3,640 lbs. (1650 kg) lift capacity
VERTI-CUT BLADE SPACING	1, 2, 3 or 4" (2.5, 5, 7.5 or 10 cm)	
MAXIMUM WORKING SPEED	1.8 mph (3.0 km/h)	
THREE-POINT CONNECTION	Category 1	Category 2
HYDRAULIC CONNECTION	One, double-acting valve	Two, double-acting valves
PTO RPM	540 RPM	
NUMBER OF BLADES	32	76
STANDARD ITEMS	PTO shaft, fraise/flail mow blade set	
WEIGHT	1,367 lbs. (620 kg)	2,908 lbs. (1319 kg)
DIMENSIONS	Width 73" (185.4 cm) Height 87" (220.9 cm) Length 62" (157.4 cm) With conveyor in transport/storage position.	Width 97" (246.3 cm) Height 45" (114.3 cm) Length 72" (182.8 cm) With conveyor in transport/storage position.
WARRANTY	One-year limited warranty. Refer to the Operator's Manual for further details.	

	BULLSEYE NUSURFACE 470 – ACCESSORIES	BULLSEYE NUSURFACE 790 – ACCESSORIES
SET OF FRAISE/FLAIL BLADES	Set of 32 blades. Part #144-7782	Set of 76 blades. Part #144-7784
SET OF VERTICUT BLADES	Set of 32 blades for 1" (2.5 cm) spacing. Part# 144-7783	Set of 76 blades for 1" (2.5 cm) spacing. Part# 144-7785

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in design, required attachments and safety features. Consult your local Toro Distributor.

