



Multi Pro[®] 1750

175-GALLON SPRAYER

FEATURES

- **Six Diaphragm Pump** – *An Industry Exclusive* – this oversized pump satisfies the highest spray rates while simultaneously supplying generous agitation flow.
- **175 gal (662 L) Elliptical Chemical Tank** – Thoughtfully designed polyethylene tank has no shelves or corners for chemical to stick on, which helps ensure a 99% spray out.
- **Sprayer Control Console** – *InfoCenter™* pressure gauge and sprayer control switches are all located in a unique console featuring Toro's exclusive 'Quick Find™' feature which intuitively helps the operator locate boom and actuator switches on the console without looking at them.
- **Rugged Triangular Spray Boom** – Standard three section, 18.5' (5.6 m) boom width provides fore and aft breakaway on impact while protecting nozzles. Raises into a crisscross position for storage and transportation. Optional 20.5' (6.25 m) boom width extension kit available.

Precise spray control on a dedicated, small platform.

Earning the market leader position in turf vehicle sprayers comes from listening to what your customers truly want in a sprayer. Toro's 175-gallon dedicated vehicle sprayer is the culmination of hundreds of hours of insightful customer input. The 1750 uses an advanced spray system design combined with cutting-edge sprayer controls and productive vehicle features to create the most advanced, efficient and accurate 175-gallon sprayer on the market. From aggressive agitation, faster response, consistent and accurate application rates, and intuitive rate set up, to precise vehicle control, this sprayer has it all.





Multi Pro[®] 1750 Specifications¹

MULTI PRO 1750, MODEL 41188	
ENGINE	Kohler, CH740 Command Series, twin-cylinder, air-cooled, 4-cycle, 27 hp (20 kW) gross.
TRACTION SYSTEM	Kanzaki / Tuff Torq 3-speed (forward), 1-speed (reverse), mechanical transaxle with differential lock.
GROUND SPEEDS	Forward: 0 – 11.5 mph (0 – 18.5 kph). Reverse: 0 – 2.5 mph (0 – 4 kph).
TIRES	Front: Kenda K404 smooth (treadless); 20x10-10. Rear: Kenda turf tread; 24x13-12.
BRAKES	Four wheel hydraulic disc, 2-piston calipers; Front: 7.5" (19 cm) diameter rotor Rear: 9.5" (24 cm) diameter rotor.
MAIN FRAME	High-strength, formed steel rear frame channels welded to steel tubular crossmembers and upper/lower steel tubular structure, ROPS standard.
SUSPENSION	Front suspension – coil over shock; Rear suspension – rigid; rubber tires.
STEERING	Fully hydraulic; steering wheel turns, lock to lock: 3.5
GAUGES/INDICATORS	Multi-function display (InfoCenter™), analog pressure gauge, mechanical fuel gauge.
VEHICLE CONTROLS	Ignition key switch, choke, headlight switch, optional wireless hour meter, speed lock.
SEAT	Single, high back cushion seat standard with manual position adjustment w/seatbelts.
WEIGHT	2200 lbs. (998 kg) shipping weight
DIMENSIONS	Measurements with spray system: Length = 140" (3.56 m) (w/booms folded in cradles) Width = 70" (1.78 m) (w/booms folded in cradles) Height = 97" (2.4 m) (w/booms folded in cradles)
WARRANTY	Two-year limited warranty. Refer to operator's manual for further details.

SPRAYER SPECIFICATIONS	
SOLUTION TANK	High density, impact resistant polyethylene with large 16" (41 cm) fill well; tapered bottom and sump with drain.
RATED CAPACITY	175 gallons (662 liters)
SPRAY PUMP	Hardi 363/5.5, 6-diaphragm positive displacement w/1" (2.5 cm) input shaft; input speed 300-1150 rpm, Flow rate of 41 gpm (155 lmp) @ 40 psi (860 rpm).
AGITATOR	Three, side-mounted jet agitation nozzles for full tank agitation.
CONTROLS	Spray pump control switch, agitator jet switch, rate switch, individual boom on/off switches, boom actuator switches, indicator lights on pump, agitation and boom switches, throttle lock.

OPEN BOOM (STANDARD)	
BOOM ASSEMBLY	18.5' (5.6 m) three section, triangular truss-style open booms, expandable to 20.5' (6.25 m) with optional kit.
BOOM ACTUATORS	Heavy-duty hydraulic lift actuators with nitro-steel plated shafts; 1-3/4" (4.4 cm) Bore x 10.06" (25.6 cm) Stroke
SPRAY NOZZLES	Eleven nozzle turrets, triple turret-mount, quick-disconnect with diaphragm check valves. Twelve nozzle turrets with optional kit.

MULTI PRO 1750 ACCESSORIES	
CLEANLOAD™ EDUCTOR	This on-board mixing station allows rapid and safe loading of any chemical without the need to first mix into a slurry. Incorporates a built-in bottle wash nozzle and has an optional suction lance to pull in liquid products from their container. Stores within the width of the spray vehicle.
FRESH WATER RINSE KIT	Simplifies and automates the triple-rinse process, saving hours and hours of clean-up time.
ELECTRIC HOSE REEL	150' (45.7 m) of 0.5" (13 mm) hose for hand or walk spraying applications. Convenient electric powered rewind. Spray gun has an adjustable nozzle from stream to fan.
PRO FOAM™ MARKING KIT	Foam dollops ensure accurate parallel path tracking. Select foam for either boom or both.
ULTRA SONIC BOOM™ KIT	Sonar sensors automatically maintain proper spray height over undulating turf.
COVERED BOOM KIT	Extends 12" (30.5 cm) below the boom to minimize chemical drift in breezy conditions while retaining full boom system functionality.
AIR INDUCTION TURBO TWIN JET NOZZLES	Exclusive to Toro in the 0.8 gpm (3.02 lpm), 1.0 gpm (3.79 lpm) and 1.5 gpm (5.68 lpm) sizes, for exceptional contact coverage.
CONTACT & SYSTEMIC NOZZLES	See complete nozzle listing in the Multi Pro[®] Nozzle Selection Brochure – available for download on toro.com

A Safety Reminder: Prior to any application, know the chemical content and the manufacturer's recommendation for protective clothing. Always wear proper clothing and mask when applying chemicals.

¹Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only.

Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.





GeoLink® Precision Spray System Specifications

TOPCON AGI-4 RECEIVER	
DIMENSIONS	11.8 inch (330 mm) diameter and 5.1 inch (130 mm) height; 5.2 lbs. (2.4 kg)
POSITIONING SYSTEM	Standard WAAS, EGNOS & MSAS. Upgradeable to RTK accuracy with high grade IMU and GSM or CDMA modules.
CONSTELLATIONS	Multi-constellation (GPS + GLONASS = GNSS).
POWER	12 volt (min)
COMPLIANCE	ISO11783 compliant
WEATHER RESISTANCE	Achieved IP67 rating

TOPCON X30 DISPLAY	
DISPLAY	12.1" (31 cm) 1024 x 768 LVDS XGA. Projected capacitive touchscreen, 1000 cd/m2 LED backlight.
DIMENSIONS	12.9" x 10.6" x 2.2" (328 x 268 x 55 mm).
WEIGHT	3.86 lbs. (1.75 kg) weight
POWER	9V - 36V input (voltage and polarity protected). N-MH internal batteries (2000mA/hr., 7.2V)
OPERATING SYSTEM	Linux with icon based "Horizon" software. Intel chipset, 1.6 GHz processor. 4GB compact flash (up to 32 GB optional).
FEATURES	Multiple inclusion zones, easy and standard modes, IP67 rated, configurable with multi-view capabilities, interactive keypad, on-demand mini views and expandable views, 28 languages, 3.5W rear-facing speaker, tree structure navigation, integrated lightbar, multiple application control, ISO UT ready.
WEATHER RESISTANCE	Achieved IP67 rating

Key Benefits of GeoLink Precision Spray System:


- Cellular-based
- Software for turf, not agriculture
- Repeatable sub-inch location accuracy
- Flexible, customizable and easy to use
- Intuitive icon-based menus
- Multiple inclusion zones – group like areas into a single job
- Easy and standard modes – password-protect application rates and other settings
- Improved consistency – less dependence on operator skill level

WAAS: The Wide Area Augmentation System (WAAS) was developed to augment the Global Positioning System (GPS), with the goal of improving its accuracy, integrity, and availability.

RTK: Real Time Kinematic (RTK) satellite correction is a technique used to enhance the precision of position data derived from satellite-based positioning systems, being usable in conjunction with all positioning platforms.



GeoLink's individual nozzle control saves time and money.

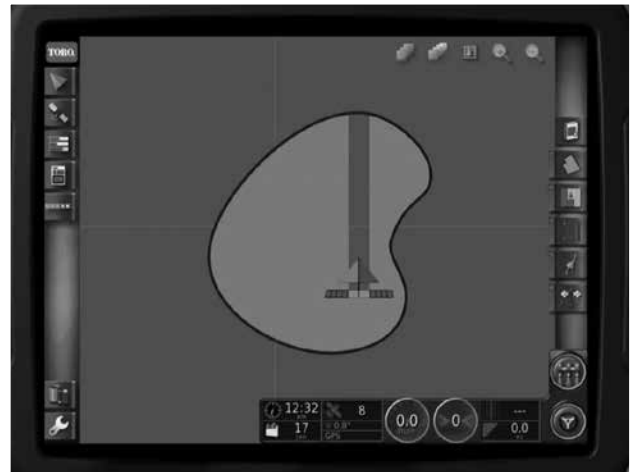

Highly intuitive, turf-based display with easy to use icons and precise mapping.

*Specifications subject to change. Please contact your Toro distributor for details.

A Safety Reminder: Prior to any application, know the chemical content and the manufacturer's recommendation for protective clothing. Always wear proper clothing and mask when applying chemicals.

