

TORO®

WORKMAN® MDX SERIES
UTILITY VEHICLES



PROVEN COMFORT & PRODUCTIVITY.

WORKMAN® MDX



SUPERIOR RIDE QUALITY (SRQ™)

The Workman® MDX Series with SRQ™ combines a coil-over shock absorber suspension design with an Active In-Frame™ twister joint. These features deliver superior ride quality for optimum operator comfort and control. The hefty payload capacity and four-wheel hydraulic brake system enhances productivity to tackle the toughest jobs. The Workman MDX has the power and versatility to help you do more.




► RUGGED DESIGN

Virtually unbreakable exterior components make the Workman MDX more durable and dependable. A double-walled composite bed can withstand the elements and heavy loads, and won't rust or dent. This vehicle is built to work as hard as you do, year after year.



► OPTIMUM COMFORT

The SRQ™ system boasts an independent A-frame front suspension, a swing-arm rear suspension design with coil-over shock absorbers brought together by the proprietary Active In-Frame twister joint. The result is a smooth ride that you and your team will notice immediately. Designed to reduce fatigue so operators can stay more productive throughout the day.

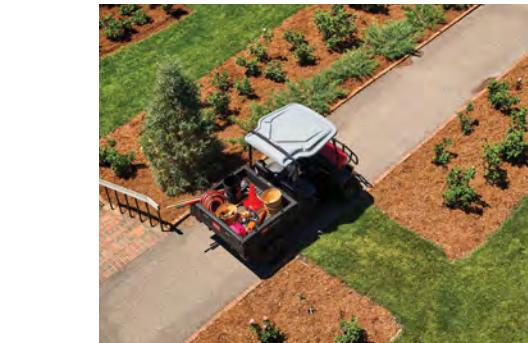

► KEY FEATURES

- Total payload up to 1,650 lbs. (750 kg)
- Towing capacity up to 1,200 lbs. (544 kg) with heavy-duty tow hitch.
- 2WD with front hydraulic disc brakes and rear wheel hydraulic drum brakes.
- 16 mph (25.6 km/h) governed. Optional 20 mph (32 km/h) requires ROPS & seat belts.



WORKMAN® MDX



DO MORE.

The Workman MDX Series combines comfort and productivity like never before. These utility vehicles have the highest total payload capacities in their class for maximum productivity. Get more jobs done in less time. Whether you are hauling a load or towing equipment, Toro offers a wide selection of attachments and accessories allowing you to transform your Workman MDX into the right tool for any job or application.



Visit toro.com or call your local distributor for a full list of available accessories and attachments.



► EXCEPTIONAL CONTROL

An automotive-grade rack and pinion steering system delivers exceptional control and lowers steering effort, while operating loaded or empty. This allows operators to focus on the task at hand and move throughout the property with ease.




► ROBUST POWER

A 480cc Briggs & Stratton® Vanguard® gas engine powers the Workman MDX and a 600cc Kubota® diesel engine powers the MDX-D to an impressive 1,250 lbs. (567 kg) cargo capacity. This vehicle is built to haul your toughest load to any jobsite.

ACCESSORY OPTIONS



BRUSH GUARD
Heavy-weight front guard helps protect against damage to the body and headlights.



FOLDING WINDSHIELD
Quick and easy fold-down design provides air flow to enhance operator/passenger comfort. Clear high-impact modified acrylic.



CANOPY
Stay protected from the elements with an extra-wide canopy with rear moisture drainage outlets. Made of durable, high-density polyethylene.



SOLID WINDSHIELD
Clear high-impact modified acrylic for protection against the elements.



DELUXE HARD CAB
This ROPS and CE certified cab enclosure features a vented front windshield for cross ventilation, a glass windshield, and side panels for increased visibility. (Doors not included)




ELECTRIC BED LIFT
A convenient, easy way to unload the cargo bed. Raises and lowers the bed efficiently within the payload capacity.



BEVERAGE CART
Features eight locking dry good doors, two cup dispensers, and eight locking cold storage doors. 850+ 12-ounce can capacity and built-in garbage/recycling bin. Contact Fairway Cafe at golfbeveragecart.com




BOSS® SNOW PLOW
60" (152.4 cm) straight blade. Contact your Toro distributor for details.



RECEIVER HITCH
This optional heavy-duty tow hitch increases the towing capacity of the Workman MDX up to 1,200 lbs. (544 kg)



SIGNAL LIGHT KIT
Headlights are standard. Brake, Tail and Turning Signal Lights are integrated into one optional kit.



LED WORK LIGHTS
Consists of two front facing and one rear facing LED work light.



FRONT RECEIVER
Provides optional attachment point for the front of a vehicle equipped with or without the Brush Guard.

SPECIFICATIONS

WORKMAN® MDX & MDX-D

MODEL	WORKMAN MDX	WORKMAN MDX-D
ENGINE	480 cc, air-cooled, two-cylinder, Briggs & Stratton® Vanguard®. Meets 2011 EPA & CARB exhaust & evaporative emissions regulations.	600 cc, liquid-cooled, 2-cylinder, Kubota® diesel. Biodiesel ready for use up to B-20 (20% biodiesel and 80% petroleum blend).
SRQ™ SYSTEM	Active In-Frame™ twister pivot joint, front and rear suspension.	
FRONT SUSPENSION	Modified MacPherson strut, adjustable coil over shock absorbers.	
REAR SUSPENSION	Trailing arm with adjustable coil over shock absorbers.	
GROUND SPEED	16 mph (25.6 km/h) governed. Optional 20 mph (32 km/h) requires ROPS and seat belts.	
BREAKS	Front wheel hydraulic disc. Rear wheel hydraulic drum.	
STEERING	Manual rack and pinion steering system with ergonomically positioned column. Steering wheel has 2.75 turns lock-to-lock with 13.75" (35 cm) diameter.	
FRAME	Welded steel channel and tube in body construction. Frame surfaces are dipped e-coat. Body and bed constructed of dent and corrosion-resistant polyethylene.	
GROUND CLEARANCE	Front: 10" (25.4 cm), Rear: 7" (18 cm)	
TIRES	Front: 22 x 9.5-10, 4-ply, Rear: 24 x 12-10, 4-ply. Optional all-terrain tires	
FUEL CAPACITY	6.5 gallons (24.6 liters)	
DIMENSIONS	Width: 61.2" (155.4 cm), Length: 121.1" (307.5 cm), Wheelbase: 80.4" (204.2 cm)	
CAB DIMENSIONS INSTALLED	Height: 79.2" (201.1 cm), Width: 64" (162.5 cm)	
CANOPY DIMENSIONS INSTALLED	Height: 79.5" (201.9 cm), Width: 61.2" (155.4 cm)	
TURNING CLEARANCE CIRCLE	Inside rear tire: 87" (221), outside front tire: 257" (653 cm).	
INSTRUMENTATION	Hour meter, low oil pressure warning light, accessory power port. Dash has 2 cup holders, radio holder and glove box storage.	Hour meter, oil pressure, glow plug, coolant temperature, battery charge indicator lights and accessory power port. Dash has 2 cup holders, radio holder and glove box storage.
CARGO BED SIZE INTERNAL	Length: 44.5" (113 cm), Width: 49" (125 cm), Height: 10.25" (26 cm), LLDPE resin.	
WARRANTY	Two-year or 1500 hour limited warranty. Refer to the Operator's Manual for further details.	

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.

Visit toro.com or call your local distributor for a full list of available accessories and attachments.



Count on it.

LEARN MORE

CONTACT US AT: **800-803-8676**
OR VISIT US AT: **toro.com**

FOLLOW US!



facebook.com/toro
twitter.com/TheToroCompany
twitter.com/ToroGolf
twitter.com/ToroGrounds
youtube.com/toro
linkedin.com/company/the-toro-company

©2019 The Toro Company. Bloomington, MN 55420 All rights reserved.
All other trademarks are property of their respective owners. Printed in
the USA.

Part Number 19-092-T

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your distributor for details on all our warranties.