

**TORO®**

## LOW-PRESSURE TAP TIMER



This newly designed battery-powered tap timer is easy to program with simple dial settings. The ball valve mechanism provides reliable and consistent performance for home, garden hose and drip irrigation systems.

## FEATURES & BENEFITS

### Low-Pressure Operation Capability

Perfect for various pressure applications ranging from 5 to 125 psi.

### Easy to Install

No plumbing required. Simply attach the controller to any ¾" hose bib or Y ball valve.

### Easy to Program

11 frequency and duration settings for customized combinations.

### Water Delay Option

Allows you to delay watering for up to 12 hours per day.

### Flexible Watering Options

Both programmed and manual watering options are available to suit your needs.


### Low Battery Indicator

Red indicator light alerts you when it's time to change batteries.



Low-Pressure Tap Timer  
53453

Easily To Install & Program

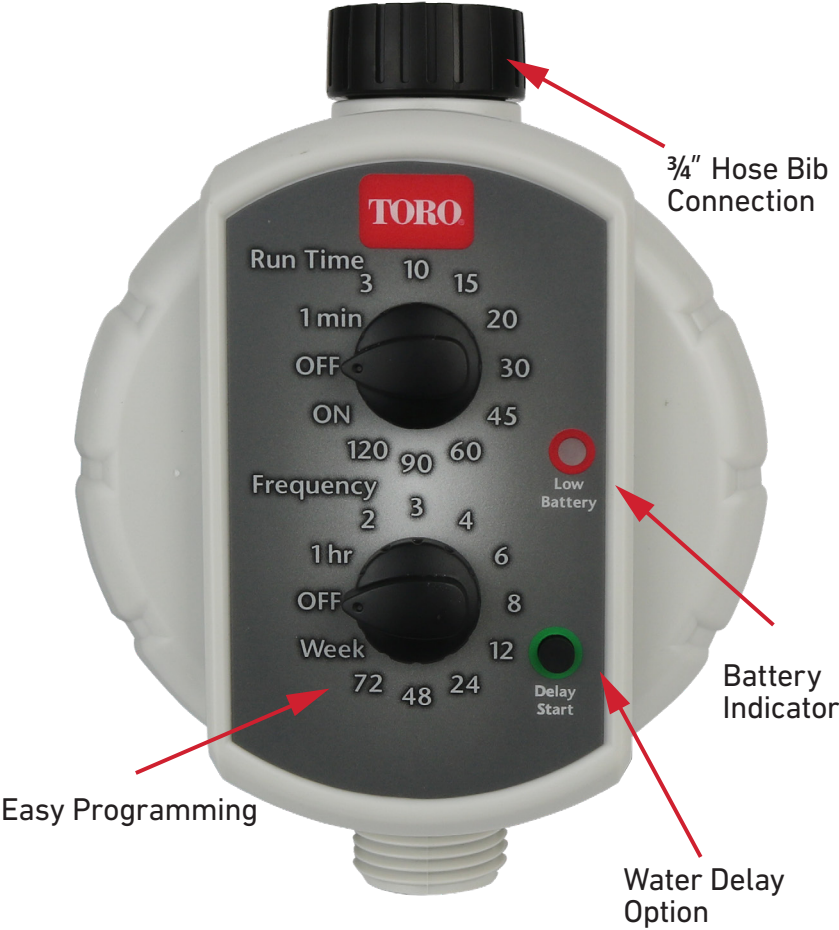

SPECIFICATIONS

Operational

- Watering duration from 1 minute to 2 hours
- Flow range from 5 to 10.5 GPM
- Recommended operating pressure range from 10-50 PSI
- Requires two (2) AA alkaline batteries (not included)

Product Dimensions

- 4" W x 6" H x 3.5" D

Warranty

- One year

Model No.	Description	Master Pack Quantity	UPC No.	Master Pack Dimensions (Height x Width x Depth)	Master Pack Weight
53453	Low-Pressure Tap Timer	12	0-21038-53453-4	9.5" x 14" x 21.5"	11 lb

