


Z MASTER[®]

5000 SERIES
REAR DISCHARGE
MOWERS

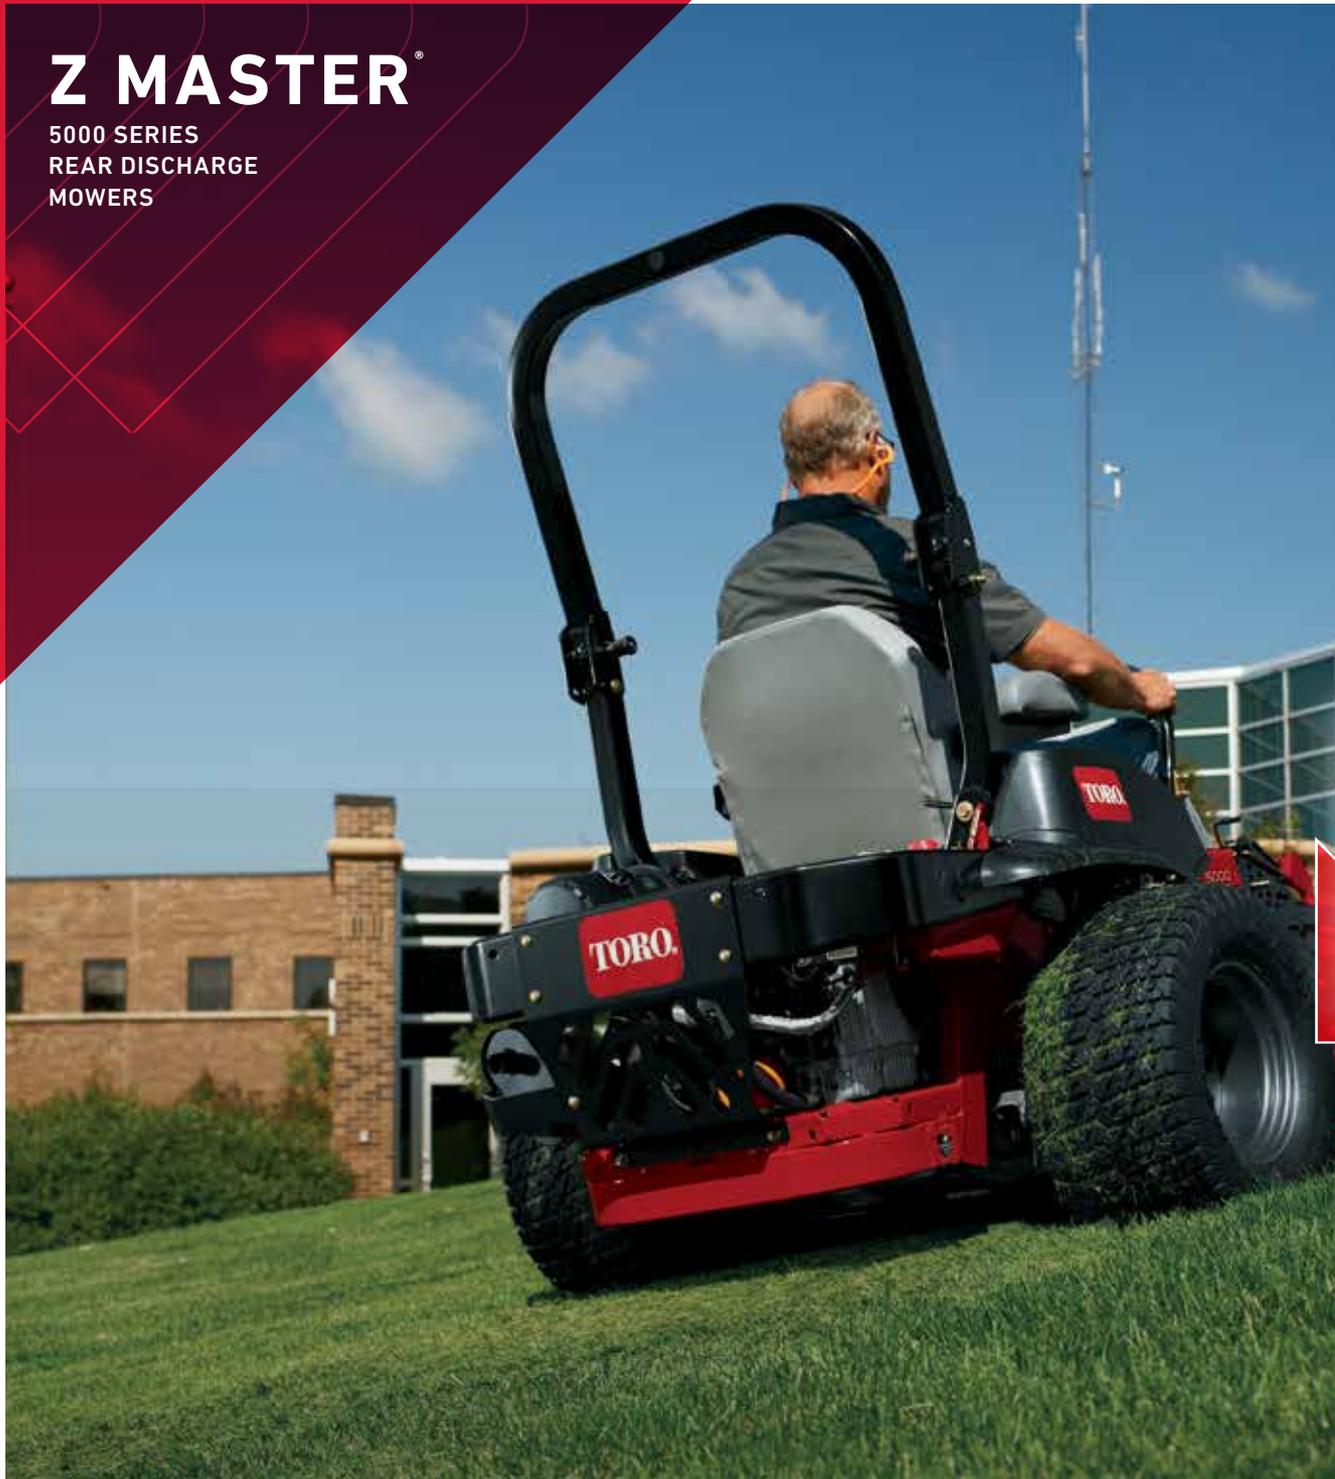

NEED A PRODUCTIVITY EDGE?
Our rear discharge models let operators trim on either side of the deck while keeping sidewalks and flowerbeds clipping-free.

SAVE TIME AND CLEANUP with the rear discharge deck design that drops clippings within the path of the mower.

GAIN FUEL EFFICIENCY with Kohler[®] Command PRO[®] engines featuring electronic fuel injection (EFI).



NEW! MICHELIN[®] TWEELS[®] AIRLESS RADIAL TURF TIRES

Standard on Z Master 5000 Series Rear Discharge mowers. No maintenance, no compromise, no downtime.



5.5–6.5 MAXIMUM ACRES PER HOUR

Maximum acres per hour based on 90% efficiency (MPH x width of cut). Actual productivity dependent upon conditions.



REAR DISCHARGE

Two blades rotate clockwise and one blade rotates counter-clockwise to spread clippings evenly through the rear discharge tunnel, saving time and cleanup.



ANTI-SCALPING SYSTEM

Durable, adjustable side bumpers protect the mower while enhancing deck flotation over uneven surfaces.



RUGGED PERFORMANCE

Highly productive in taller grass and weed conditions.

Products shown are for representation only. Model year 2021 Z Master 5000 Rear Discharge units come standard with Michelin® Tweel turf tires.

	72921†	72922†
POWER SYSTEM		
Commercial Engines at 3600 RPM*	25 hp Kohler Command PRO EFI (747cc)	26.5 hp Kohler Command PRO EFI (747cc)
Starter	Electric	
Heavy-Duty Canister Air Cleaner	Standard	
Drive Tires	24" x 12" – 12" Michelin® Tweels (61 x 30.5 – 30.5 cm)	
Caster Tires	13" x 6.5" – 6" Flat-Free Semi-Pneumatic (33 x 16.5 – 15.2 cm)	
Fuel/Capacity	Gas/12-Gal (45.4 L)	
Hour Meter	Smart Hour Meter	
Hydraulic Drive System	Unitized Pumps & Wheel Motors	
Pump	12cc/rev (shock valves)	
Wheel Motor	14.6 cir	
Maximum Forward Speed	10 mph (16.1 km/h)	
Clutch	Electromagnetic	

MOWING DECKS		
Deck Size	60" (152.4 cm)	▶ 72" (182.9 cm)
Cutting Deck	7-Gauge TURBO FORCE Rear Discharge	
Bullnose Bumper	Standard	
Deck Lift Design	Extension Spring	
Spindle Housings	9" (22.9 cm) Diameter Cast Aluminum	
1" (2.5 cm) Heavy-Duty Spindle Shaft	Standard	
Spindle Bearings	Maintenance-Free	
Cutting Height	1.0" – 5.5" (2.5 – 14 cm)	
Blades	.204" (.5 cm) Heat-Treated Steel	
Blade Tip Speed	18,500+ ft/min	
Belt Construction	Aramid Fiber V-Belt	
Anti-Scalp Rollers	2 Side Bumpers/4 Rollers	
Carrier Frame Construction	3" x 1.5" x 10-Gauge (7.6 cm x 3.8 cm x 10-Gauge)	

FEATURES		
Steering Controls	1-5/8" (4.1 cm) Diameter Grips; Adjustable, Dampened	
Operator Seat	Deluxe Suspension with 3-D Isolation Mounts	
Armrests	Standard	
Seat Suspension System	Standard	
Folding ROPS	Standard	
Storage Compartment	Standard	
Foot Pedal Deck Lift	Standard	
Z Stand	Optional	
Floor Pan	Pierced, Extruded Tread; No-Tools Deck Access	

WEIGHTS AND MEASUREMENTS				
Weight	1,335 lbs.	605.5 kg	1,335 lbs.	605.5 kg
ROPS Height (Folded)	46.8"	118.9 cm	46.8"	118.9 cm
ROPS Height (Upright)	70.5"	179.1 cm	70.5"	179.1 cm
Deck Clearance Width	78.3"	198.9 cm	78.3"	198.9 cm
Deflector Width	N/A	N/A	N/A	N/A
Length	87.3"	221.7 cm	87.3"	221.7 cm

* The gross horsepower of these gasoline engines was laboratory rated at 3600 rpm by the engine manufacturer in accordance with SAE J1940 or SAE J1995. As configured to meet safety, emission and operating requirements, the actual engine horsepower on these mowers will be significantly lower. †CARB compliant model or model available.

▶ = Step Up Feature

