

TORO®

LANDSCAPE CONTRACTOR EQUIPMENT RANGE



PROFESSIONAL EQUIPMENT





A LEGACY OF PERFORMANCE.

FROM INNOVATION TO CUSTOMER CARE.

**FROM
START
■ TO ■
FINISH™**

From hardscape to landscape to mowing, Toro® has you covered with a full range of solutions for the jobs you need to do.

Our entire line is designed with input from **grounds professionals** — and our work is never finished. Our agronomists and engineers continually work on new solutions to increase productivity, reduce fuel consumption and improve growing conditions. The result is a line of products that offers ease of use for



FROM LEGENDARY DURABILITY



TO ALL-SEASON VERSATILITY

©2019 The Toro Company. All rights reserved.

operators at every skill level, durability to handle tough conditions, and reliability to minimise downtime and keep your operators productive. Plus, it's all backed by service and support from local Toro dealers who are dedicated to helping customers succeed.

Explore the full line of Toro products for grounds professionals at **toro.com** and contact your local Toro dealer to learn more.



Featured

HD WALK MOWER COLLECTION

HD PROLINE

HEAVY DUTY 53 CM

22291

TOUGH MACHINES FOR TOUGH JOBS

With commercial grade engines and up to 6mm thick cast aluminium decks, Toro® Proline mowers are designed to withstand the demands of professional gardeners and landscapers.



QUALITY & FLEXIBILITY

Deck design reduces the chance of blocking and more efficiently collects grass. Excellent recycling performance too, all in one model.



RECYCLER® TECHNOLOGY

The front throw chamber and blade are designed to help lift, suspend and re-cut clippings into a fine mulch, promoting healthy, lush turf.



DESIGNED FOR COMMERCIAL USE

The 6mm thick die-cast aluminium deck is designed to withstand the abuse of commercial mowing, whilst minimising overall weight. The low hand arm vibration allows extended daily use.



ANTI-SCALP CUP

Protects the turf from scalping when mowing uneven surfaces. It also provides additional protection to blade bolts.



22291



EASY-EMPTY BAG

Easy on/off design and wider bag opening makes quick work of grass clipping disposal.



22280

**LONG RANGE FUEL TANK**

Saves time on re-fuelling with a 3.8 litre fuel tank. *(22280 only)*

**POWERFUL COMMERCIAL ENGINES**

Perform reliably in demanding conditions. With a replaceable spin-on oil filter for easy maintenance *(22280 only)*

22280

For optimal performance and productivity, choose the 22280 Proline mower model with its maintenance-free 3-speed transmission, rugged tubular engine guard, steel skid plates on the deck, anti-scalp cup and more.

HEAVY DUTY ACCESSORIES

REAR DISCHARGE KIT

130-9374

ENGINE GUARD (22291)

130-9700

WALK POWER MOWER**COVER**

490-7462

REPLACEMENT BAG

125-1030

| MODEL | 22291 HD PROLINE | 22280 HD PROLINE |
|--------------------------|---------------------------------------|---------------------------------------|
| CUTTING WIDTH | 53 cm (21") | 53 cm (21") |
| ENGINE | Kawasaki, 4-cycle, 179 cc, FJ180V KAI | Kawasaki, 4-cycle, 179 cc, FJ180V KAI |
| STARTER | Recoil, ZS | Recoil, BBC |
| DRIVE SYSTEM | Fixed speed, RWD | ▶ 3-speed, RWD |
| DECK TYPE | Recycler/Rear Bag, Aluminum | Recycler/Rear Bag, Aluminum |
| BLADE BRAKE CLUTCH (BBC) | - | ▶ Standard |
| HEIGHT OF CUT | 25 mm – 114 mm (1"– 4.5"), 4 point | 25 mm – 114 mm (1"– 4.5"), 4 point |
| SPEED | 0-6.0 km/h (0-3.7 mph) forward | 0-6.0 km/h (0-3.7 mph) forward |
| FUEL TANK CAPACITY | Petrol / 1.9 litres (0.5 gal) | ▶ Petrol / 3.8 litres (1 gal) |
| WEIGHT | 50 kg (110 lbs) | 56 kg (124 lbs) |
| HAND ARM VIBRATION | 2.7 m/s ² | 2.7 m/s ² |



22280

▶ = Enhanced or step-up feature

Featured

HD WALK MOWER COLLECTION

NEW!



TURFMASTER™ HDX

HEAVY DUTY 76 CM

FINISH THE JOB FASTER

The Toro® 76cm TurfMaster HDX is in a class of its own. It covers more ground in less time than smaller models, yet is easy to handle. And every component from top to bottom is built for heavy use in rough conditions, from kerbs to trailers to multiple operators.

It's professional-grade toughness with a professional-quality of cut.

- ✓ **FINISH THE JOB FASTER** with the highly productive 76 cm deck.
- ✓ **SIMPLIFY OPERATION** with a conventional walk-behind design that's easier to use and control compared to other mower styles.
- ✓ **GET COMMERCIAL-GRADE POWER** for heavy use with the Kawasaki® engine with spin-on oil filter and dual element air filter.
- ✓ **EXTEND MOWING TIME** between refueling with a 3.8 litre fuel tank.
- ✓ **GAIN EXCELLENT CONTROL** with the easy-to-operate, dual-action, single-bail control system.
- ✓ **DISENGAGE BLADES** without shutting down the engine, thanks to the Blade Brake Clutch (BBC) system.



POWERFUL COMMERCIAL ENGINE

Reliable and durable Kawasaki commercial engine with a 3.8 litre long range fuel tank which saves time on re-fuelling.



BLADE BRAKE CLUTCH (BBC)

Stops the blade but enables the engine to continue running while emptying the grass bag or travelling over non-grassed areas.



TWIN BLADE CUTTING SYSTEM

The Turfmaster HDX increases contractor productivity. The 76cm wide deck and unique twin blade system offer savings of up to 40% on mowing time*.



HEAVY-DUTY COMPONENTS

Deck skid side skirts, steel bull-nose front bumper, tough sealed transmission and a strong one-piece handle are all designed for the demands of commercial mowing.



LONG RANGE FUEL TANK

Saves time on re-fueling with a 3.8 litre fuel tank.

TURFMASTER™ HDX ACCESSORIES



76 CM (30") WALK POWER MOWER COVER
490-7461



SPECIFICATIONS

| | |
|---------------------------------|---|
| MODEL | 22207 TURFMASTER HDX NEW! |
| CUTTING WIDTH | 76 cm (30") |
| ENGINE | Kawasaki®, 4 cycle, 179cc FJ180V Commercial |
| STARTER | Recoil, Blade Brake Clutch (BBC) |
| DRIVE SYSTEM | Heavy Duty Variable Speed RWD |
| DECK TYPE | Steel & Aluminium - Recycler/Rear Bag/Side Discharge |
| BLADE BRAKE CLUTCH (BBC) | Standard |
| HEIGHT OF CUT | 38 mm - 127 mm (1.5" - 5") in 13 mm (0.5") increments |
| SPEED | Variable up to 6.4 km/h (3.98 mph) |
| FUEL TANK CAPACITY | Petrol / 3.8 litres (1 gal) |
| WEIGHT | 85 kg (187 lbs) |
| HAND ARM VIBRATION | 6.2 m/s ² |

RWD - Rear-Wheel Drive.
BBC - Blade Brake Clutch

*Time Savings via wider cutting path and enhanced speed of Turfmaster vs. 53cm Toro mower, and will vary due to mowing conditions.

➤ = Enhanced or step-up feature

Featured

HD WALK MOWER COLLECTION



PROSTRIPE® 560

56 CM STRIPING MOWER

PICK THE RIGHT PLAYER

Designed to provide a precise cut and clean striped finish the, Toro ProStripe® 560 leaves your turf looking at its best. This lightweight and manoeuvrable mower features a two-piece ribbed roller design to leave a crisp stripe, and the new MatchCut™ technology matches the turf height to make post-game cleanup a breeze.



TWO PIECE ROLLER

Two-piece roller significantly improves manoeuvrability and minimises turf marking when compared to single-piece roller designs whilst the ribbed tread provides superior traction.



MATCHCUT™

Fine tune the cutting height with MatchCut™. Providing half-increment (3.25mm) settings, MatchCut proves ideal for use on fine turf applications or when using multiple machines on a large area when accurate height setting is crucial.



GROOMER BRUSH KIT

Promote healthier turf and a finer cut by reducing lateral blade growth and removing surface debris. Adjustable for rake and height to allow precision setting. (134-3722)

| MODEL | 02657 PROSTRIPE 560 |
|--------------------|---|
| CUTTING WIDTH | 56 cm (22") |
| ENGINE | Kawasaki® FJ180V KAI OHV 4-cycle, 179 cc |
| STARTER | Recoil, BBC |
| DRIVE SYSTEM | 3-Speed Self Propelled |
| DECK TYPE | Aluminum, Rear Discharge/Rear Bag |
| HEIGHT OF CUT | 13-position, 13-60 mm, 3.25 mm increments |
| SPEED | 3.0; 4.0; 5.2 km/h (1.9; 2.5; 3.2 mph) |
| FUEL TANK CAPACITY | Petrol / 1.7 litres (0.45 gal) |
| WEIGHT | 66 kg (146 lbs) |



HOVERPRO®

MOWERS

HOVERPRO® ACCESSORIES



HI-RISE KIT 02619/02620
Simply bolt to existing deck to increase height of cut by 35mm. (02615 / 02612 only)



TRANSPORT WHEELS 02622
Detachable wheels for easy site-to-site transport. (Not available for 02615)



EXTENSION HANDLES 02623
Makes working on slopes or hard to reach areas even easier. (Not available for 02615)

FOR MOWING TOUGH, UNDULATING GROUND AND STEEP SLOPES

The HoverPro® range offers the ideal mowing solution. Though suitable for all terrains, HoverPros™ excel in mowing tough, undulating ground and steep slopes, allowing these areas to be maintained safely and effectively, even on slopes up to 45 degrees (except 02615 = 25°).

With no wheels and excellent hovering, there is minimal risk of the mower dropping off the grass edge, making these mowers an ideal choice for maintaining areas around flower beds or golf course bunkers.

| MODEL | 02615 HOVERPRO® 400 | 02612 HOVERPRO® 450 | 02604 HOVERPRO® 500 | 02606 HOVERPRO® 550 |
|--------------------------|---------------------------|---------------------------|------------------------------|----------------------------|
| ENGINE | Honda GXV57 | Honda GCV -160 OHC | Honda GCV-160 OHC | Honda GCV-160 OHC |
| DRIVE SYSTEM | Push | Push | Push | Push |
| CUTTING WIDTH | 40 cm (16") | ▶ 46 cm (18") | ▶ 51 cm (20") | ▶ 53 cm (21") |
| CUTTER SYSTEM | Nylon Line | Nylon Line | ▶ Steel Cutting Blade | Steel Cutting Blade |
| HEIGHT OF CUT/ADJUSTMENT | 18 - 30 mm (0.7" - 1.18") | 18 - 30 mm (0.7" - 1.18") | ▶ 16 - 34 mm (0.63" x 1.34") | 16 - 34 mm (0.63" x 1.34") |
| FUEL CAPACITY | 0.27 litres (0.1 gal) | ▶ 0.77 litres (0.2 gal) | 0.77 litres (0.2 gal) | 0.77 litres (0.2 gal) |
| SLOPE ANGLE | 25° | ▶ 45° | 45° | 45° |
| WEIGHT | 12.5 kg (28 lbs) | 17.6 kg (39 lbs) | 19 kg (42 lbs) | 19 kg (42 lbs) |

Featured

TURF RENOVATION COLLECTION

NEW!

STAND-ON AERATOR

61 CM

HEALTHY TURF MAKES ALL THE DIFFERENCE.

So can the right aeration, seeding, and dethatching equipment. Toro's turf renovation line combines heavy-duty commercial durability with features that save time, including mower-inspired controls and exceptional manoeuvrability. You also get the speed and fuel capacity you need to push your productivity to the max.



51 CM (20") HYDRAULIC SEEDER

- Handles like a self-propelled mower
- Wide frame allows for superior stability and manoeuvrability on hills
- Adjustable seed flow rate for varying applications



61 CM (24") STAND-ON AERATOR

- Electronic depth control allows operators to provide consistent core depth and quality
- Compact design profile fits through standard 91 cm (36") wide gates
- New Smart Hour Meter displays core depth and critical maintenance reminders



BRUSH CUTTER

- Level tall brush, weeds, saplings and heavy vegetation
- 71 cm (28") cutting deck increases operator productivity
- Pivoting deck for easy maneuvering on uneven terrain
- Simple intuitive traction controls

POWER BROOM

91 CM



POWER BROOM

- Patented commercial power steering offers effortless manoeuvrability with the pull of a trigger
- Variable speed technology - 6 forward and 2 reverse speeds with shift-on-the-fly transmission
- Use year round - clears snow, debris and dethatches turf



INDEPENDENT CONTROL LEVERS

For broom engagement and ground drive allows you to disengage and engage the broom at any point while you're driving.

SPECIFICATIONS

| MODEL | 23508 NEW! 51 CM (20") HYDRAULIC SEEDER* | 29516 NEW! 61 CM (24") STAND-ON AERATOR** | 23522 BRUSH CUTTER, BRC-28 | 38700 POWER BROOM |
|----------------------|--|---|-------------------------------|---|
| ENGINE | Kohler® Command PRO® CH395 | Kohler® CH440 | Toro® with Electric Start | Kohler® Command PRO® Multi-Season |
| FUEL CAPACITY | 6 L (1.5 gal) | 7 L (1.8 gal) | 4 L (1 gal) | 4 L (1 gal) |
| CUTTING WIDTH | — | — | 71 cm (28") | — |
| CUTTING HEIGHT | — | — | 9,5 cm (3.75") | — |
| WORKING WIDTH | 51 cm (20") | 61 cm (24") | — | 91 cm (36") |
| DECK HEIGHT | Up to 2,5 cm (1") | Up to 12,7 cm (5") | — | — |
| WIDTH | 76 cm (30") | 90 cm (35.5") | 76 cm (30") | 118cm (46.5") |
| HEIGHT | 71 cm (28") (handle folded) 114 cm (45") (handle working) | 130 cm (51") | 106.5 cm (42") | 105.5 cm (41.5") |
| LENGTH | 96,5 cm (38") (handle folded) 137 cm (54") (handle working) | 174 cm (68.5") | 221 cm (87") | 185 cm (73") |
| WEIGHT | 122 kg (270 lbs) | 388 kg (856 lbs) | 170 kg (375 lbs) | 159 kg (350 lbs.) |
| GROUND SPEED | Up to 4.5 km/h (3 mph) fwd Up to 3.5 km/h (2 mph) rev | Up to 11 km/h (7 mph) fwd Up to 3.5 km/h (2 mph) rev | Push propelled | 9.5 km/h (6 mph) fwd, 3.0 km/h (2 mph) rev |
| SEED HOPPER CAPACITY | 18 kg (40 lbs) | — | — | — |
| TINES/BLADES/BROOM | 10 verticutting blades | 36 tines | 1 blade | 18 broom wafers |

*fitted with CE kit 135-6822

**fitted with CE kit 135-7423

Featured

MID-SIZE MOWER COLLECTION



MID-SIZE WALK-BEHIND

91CM SIDE DISCHARGE • FLOATING DECK

30071

SHOWS UP TO WORK, SEASON AFTER SEASON

A great tool for landscape professionals, these durable, enhanced-productivity mowers are ideal for all hard to access areas. The engine orientation offers a stable method of operating on slopes and the floating deck makes it also suitable for finer turf applications. Further more, its compact size means it can be transported in a commercial van.

- ✓ **PREVENT IMPACT DAMAGE** with the TURBO FORCE® 7 gauge steel deck and welded bull-nose bumper.
- ✓ **ENHANCED DURABILITY** with robust cast iron spindle housings with maintenance-free sealed bearings.
- ✓ **FINE-TUNE THE CUT** for different conditions or seasons with the patented adjustable baffle.
- ✓ **REDUCE FATIGUE** with straightforward twin-lever controls (hydro models) or Toro® exclusive T-Bar control system (gear drive models).
- ✓ **CHANGE HEIGHT-OF-CUT** easily with 4-pin adjustment.



LONG RANGE FUEL TANK

Provides excellent operational range and offers high productivity through reduced downtime for refueling.



30070 - T-BAR GEAR CONTROL

Exclusive 'T-Bar' control system is easy to learn and operate. Peerless 5-speed gear drive system with reverse. Hour meter fitted as standard.



30071 - T2 HYDRO CONTROL

Twin lever 'T2' control system with independent choke and throttle controls provide precise starting for operational control. Twin Hydro-gear pumps ensure smooth and easy operation with fast 8km/h (5mph) forward speed. Hour meter fitted as standard.



COMMERCIAL-GRADE ENGINES

Deliver many hours of trouble-free life. Twin cylinder design runs smoothly and delivers excellent load response.



FLAT-FREE CASTER TYRES

Eliminate time-consuming flats so mowers can spend more time in the field and less time in the workshop.



RUBBER DISCHARGE CHUTE

Maximum impact dispersion is assured by the impact resistant rubber chute. It flexes to allow close trimming without damaging either the chute or landscaping structures.



TURBO FORCE® DECK

Provides strength and durability with its heavy-duty welded 7 gauge steel construction. A 13mm wear guard on the trim side of the deck and bull-nose bumper have been added for extra strength.



30070

MID-SIZE ACCESSORIES



SULKY RIDING PLATFORM
30110



OPERATOR CONTROLLED DISCHARGE CHUTE KIT
(30070 only)
115-4190

SPECIFICATIONS

| MODEL | 30070 - GEAR | 30071 - HYDRO |
|---------------|---|--|
| CUTTING WIDTH | 91 cm (36") | 91 cm (36") |
| ENGINE | Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled, 10,8kW (14.5 hp) | Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled, 10,8kW (14.5 hp) |
| STARTER | Recoil | Recoil |
| DRIVE SYSTEM | Peerless® 5-speed, with reverse | Twin Hydro-gear® pumps with Parker wheel motors |
| DECK TYPE | TURBO FORCE® Side Discharge, Recycler | TURBO FORCE® Side Discharge, Recycler |
| HEIGHT OF CUT | 25 - 114 mm (1" - 4.5") | 25 - 114 mm (1" - 4.5") |
| SPEED | Forward: 0 - 7.5 km/h (5 mph) Reverse: 3.7 km/h (2 mph) | ▶ Forward: 0 - 8.0 km/h (5.0 mph) Reverse: 3.2 km/h (2.0 mph) |
| FUEL/CAPACITY | Petrol / 19 litres (5 gal) | Petrol / 19 litres (5 gal) |
| WEIGHT | 267 kg (588 lbs) | 303 kg (668 lbs) |

Featured

MID-SIZE MOWER COLLECTION

MID-SIZE WALK-BEHIND

81 CM / 91 CM / 122 CM FIXED DECK OR FLAIL

BUILT FOR POWER, BUILT TO LAST

For a demanding job. It's good to know there are some things you can count on. Like the way your Toro® mid-size mower stands up to punishing use, season after season. And the TURBO FORCE cutting system that evenly disperses fine clippings for a flawless cut every time. With comfortable controls and a choice of decks, you're well on your way to getting more done in a day.

- ✓ **FLEXIBLE** Power units with a choice of 3 decks and a flail to suit different job conditions.
- ✓ **PREVENT IMPACT DAMAGE** with the TURBO FORCE 7 gauge steel deck and welded bull-nose bumper.
- ✓ **ENHANCED DURABILITY** with robust cast iron spindle housings with maintenance-free sealed bearings.
- ✓ **REDUCE FATIGUE** with the industry-standard pistol grip controls.
- ✓ **FINE-TUNE THE CUT** for different conditions or seasons with the patented adjustable baffle.
- ✓ **MAXIMIZE PERFORMANCE** with commercially proven heavy-duty drive system.





EASY HEIGHT OF CUT ADJUSTMENT

Provides cutting heights ranging from 25 to 108mm in 6mm increments with easy to change vertical pin height of cut system.



CHOICE OF REAR DISCHARGE DECKS

Each offering unsurpassed strength with 7 gauge aluminium, a superior cut and increased productivity in extreme mowing conditions.



LONG RANGE FUEL TANK

Provides excellent operational range and offers high productivity through reduced downtime for refueling.

MID-SIZE ACCESSORIES

OPTIONAL FLAIL ATTACHMENT

Designed for use in the most demanding conditions, the Flail attachment is the ideal choice for mowing rough, overgrown areas. The high quality welded-steel frame construction houses a robust 91cm flail rotor which is balanced to reduce vibration and ensure maximum operational time for the operator.



ROBUST FLAIL CONSTRUCTION

Robust 91cm wide 31cm diameter Flail rotor with 24 independent flail blades for effective cutting performance.



HEIGHT OF CUT

The easy adjustment and infinitely variable height of cut mechanism makes the flail attachment versatile enough to handle any operating conditions.

WHEEL OPTIONS (TO BE SPECIFIED WITH 31914)



TURF TYRE KIT 02929

CLEATED TYRE KIT 02930

DUAL WHEEL KIT 02931

NARROW WHEEL KIT* 02932

*Recommended when specifying 82cm deck with 31914.

SPECIFICATIONS

| MID-SIZE | 31914 HYDRO POWER UNIT | 44410TE NEW! | 44424TE NEW! |
|---------------|--|--|--|
| ENGINE | Kawasaki, 4-cycle, 603 cc, FS541V, OHV V-Twin, 11.2 kW (15 hp) | Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled 10.8 kW (14.5 hp) | Kawasaki, 4-cycle, 603 cc, FS541V, OHV V-Twin, 11.2 kW (15 hp) |
| STARTER | Electric | Electric | Electric |
| DRIVE SYSTEM | Twin Hydro-gear® pumps with Parker® wheel motors | Twin Hydro-gear pumps | Twin Hydro-gear pumps |
| DECK TYPE | TURBO FORCE® Rear Discharge or Flail | TURBO FORCE® Side Discharge, Recycler (optional) | TURBO FORCE Side Discharge, Recycler (optional) |
| HOC | Rear Discharge: 25 - 108 mm (1" - 4.25") Flail: 12 - 140 mm (0.5" - 5.5") | 38 - 114 mm (1.5" - 4.5") | 38 - 114 mm (1.5" - 4.5") |
| SPEED | Forward: 0 - 9.6 km/h; (0 to 6 mph) Reverse: 0 - 3.2 km/h (0 to 2 mph) | Forward: 0 to 11 km/h (0 to 7 mph); Reverse: 0 to 4.8 km/h (0 to 3 mph) | Forward: 0 to 11 km/h (0 to 7 mph); Reverse: 0 to 4.8 km/h (0 to 3 mph) |
| FUEL/CAPACITY | Petrol / 19 litres (5 gal) | Petrol / 19 litres (5 gal) | Petrol / 19 litres (5 gal) |
| WEIGHT | 129 kg (284 lbs) | 270 kg (595 lbs) | 294 kg (648 lbs) |

| REAR DISCHARGE DECKS | 02710 | 02711 | 02712 |
|----------------------------------|--|---|----------------------|
| WIDTH OF CUT | 81 cm (32") | ▶ 91 cm (36") | ▶ 122 cm (48") |
| HEIGHT OF CUT | 25 - 108 mm (1" - 4.25") in 6 mm (0.24") increments | | |
| HAND ARM VIBRATION (HAV) | 2.0 m/s ² | 1.8 m/s ² | 3.1 m/s ² |
| WHEEL OPTIONS | Narrow Wheel Kit (02932) | Dual Wheel Hub Kit (02931) Cleated Tyre Kit (02930) Turf Tyre Kit (02929) | |
| OPTIONAL ACCESSORIES | | Tru Trak Sulky (30109) | |
| NET WEIGHT (W/ TRACTION UNIT) | 261 kg (575 lbs) | 263 kg (580 lbs) | 279 kg (615 lbs) |

| FLAIL ATTACHMENT | 02720 |
|----------------------------------|---|
| WIDTH OF CUT | 91 cm (36") |
| HEIGHT OF CUT | Infinitely variable between 12 mm - 140 mm (0.5" - 5.5") |
| HAND ARM VIBRATION (HAV) | 3.3 m/s ² |
| WHEEL OPTIONS | Dual Wheel Hub Kit (02931) Cleated Tyre Kit (02930) Turf Tyre Kit (02929) |
| OPTIONAL ACCESSORIES | Tru Trak Sulky (30109) |
| NET WEIGHT (W/ TRACTION UNIT) | 305 kg (672 lbs) |

Featured

GRANDSTAND® SERIES

NEW!



GRANDSTAND®

STAND-ON MOWERS 91 CM / 102 CM / 122 CM

GET IN, GET DONE AND ON TO THE NEXT JOB FASTER

Rough bumps and challenging terrain are all in a day's work. Feeling them shouldn't have to be.

The Toro® GrandStand® combines the speed and comfort of a zero-turn rider with the on-and-off ease of a wide area walk-behind — creating a fast, manoeuvrable and more productive alternative. Cushioned suspension keeps operators fresh while the traction and stability keep them working. It's the ideal combination to get more done in less time.

- ✓ **IMPROVE PRODUCTIVITY** through easy access on and off the machine.
- ✓ **SAVE TRAILER SPACE** and enhance versatility with compact size.
- ✓ **REDUCE OPERATOR FATIGUE** with platform suspension and twin-lever steering controls.
- ✓ **INCREASE OPERATOR VISIBILITY** which leads to less damage and higher-quality work.
- ✓ **ADJUST HEIGHT-OF-CUT** from the operator platform.
- ✓ **REDUCE VIBRATIONS** and improve footing with the anti-fatigue rubber mat.



2-IN-1 VERSATILITY

Toro's fold-up operator platform allows conversion of the GrandStand to a walk-behind. Just lower it back down to ride – no need to switch mowers.



INNOVATIVE SPEED CONTROL

Changes drive tyre response without limiting the travel of the controls, or slowing down the engine or blades.



FLEX-RIDE OPERATOR PLATFORM

Self-compensates for operators of all sizes, resulting in less fatigue and more productivity all day.



TRACTION AND HANDLING

A wide stance and optimal balance enhance hillside stability and control. Operators can shift weight as needed to further enhance performance.



ULTRA-COMPACT FOOTPRINT

Ideal for smaller residential properties or areas with gates and tight spaces, available in 91cm and 102cm models.

GRANDSTAND ACCESSORIES



RUBBISH BAG KIT

121-7530 (74534TE, 74536TE, 74540TE)

133-1435 (74504TE, 74542TE)



STRIPING KIT

117-8560 (74534TE, 74536TE, 74540TE)

133-1436
(74504TE, 74542TE)



RECYCLER KIT

110-2080 (74534TE & 74540TE)
110-2070 (74536TE)

115-7466 (74504TE)
134-3217 (74540TE)
134-3259 (74542TE)



LIGHT KIT

114-3505 (74534TE, 74536TE, 74540TE)

133-1437 (74504TE, 74542TE)



STROBE KIT


133-1495 (74542TE, 74504TE)

SPECIFICATIONS

| MODEL | 74534TE | 74540TE NEW! | 74536TE | 74504TE | 74542TE NEW! |
|------------------|--|--|--|--|--|
| CUTTING WIDTH | 91 cm (36") | 91 cm (36") | ▶ 102 cm (40") | ▶ 122 cm (48") | 122 cm (48") |
| DEFLECTOR WIDTH | 131 cm (52") | n/a | 141 cm (56") | 160 cm (63") | n/a |
| ENGINE | Kawasaki®, 603 cc, FS541V | Kawasaki, 603 cc, FS541V | Kawasaki, 603 cc, FS541V | Kawasaki, 726 cc, FX691V | Kawasaki, 726 cc, FX691V |
| GROUND SPEED | 0-8 km/h (0 - 5 mph) | 0-8 km/h (0 - 5 mph) | 0-8 km/h (0 - 5 mph) | ▶ 0-12 km/h (0 - 4.5 mph) | 0-12 km/h (0 - 4.5 mph) |
| DECK TYPE | TURBO FORCE Side Discharge | TURBO FORCE Rear Discharge | TURBO FORCE Side Discharge | TURBO FORCE Side Discharge | TURBO FORCE Rear Discharge |
| DECK HEIGHT | 127 mm (5") | 127 mm (5") | 127 mm (5") | 140 mm (5.5") | 140 mm (5.5") |
| HOC | 25-127 mm (1" - 5") | 25-127 mm (1" - 5") | 25-127 mm (1" - 5") | 38-127 mm (1.5" - 5") | 38-127 mm (1.5" - 5") |
| SPINDLE BEARINGS | Sealed | Sealed | Sealed | Sealed | Sealed |
| DRIVE TYRES | Turf Master® 46 x 22 - 20 cm (18" x 8.5" - 8") | Turf Master 46 x 24 - 20 cm (18" x 9.5" - 8") | Turf Master 46 x 24 - 20 cm (18" x 9.5" - 8") | ▶ Turf Master 51 x 25 - 20 cm (20" x 10 - 8") | Turf Master 51 x 25 - 20 cm (20" x 10 - 8") |
| CASTER TYRES | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic |
| FUEL/CAPACITY | Petrol, 29.5 litres (8 gal) | Petrol, 29.5 litres (8 gal) | Petrol, 29.5 litres (8 gal) | ▶ Petrol, 38 litres (10 gal) | Petrol, 38 litres (10 gal) |
| WEIGHT | 343 kg (756 lbs) | 352 kg (776 lbs) | 351 kg (774 lbs) | 407 kg (897 lbs) | 415 kg (915 lbs) |

Featured

ZERO TURN MOWER COLLECTION

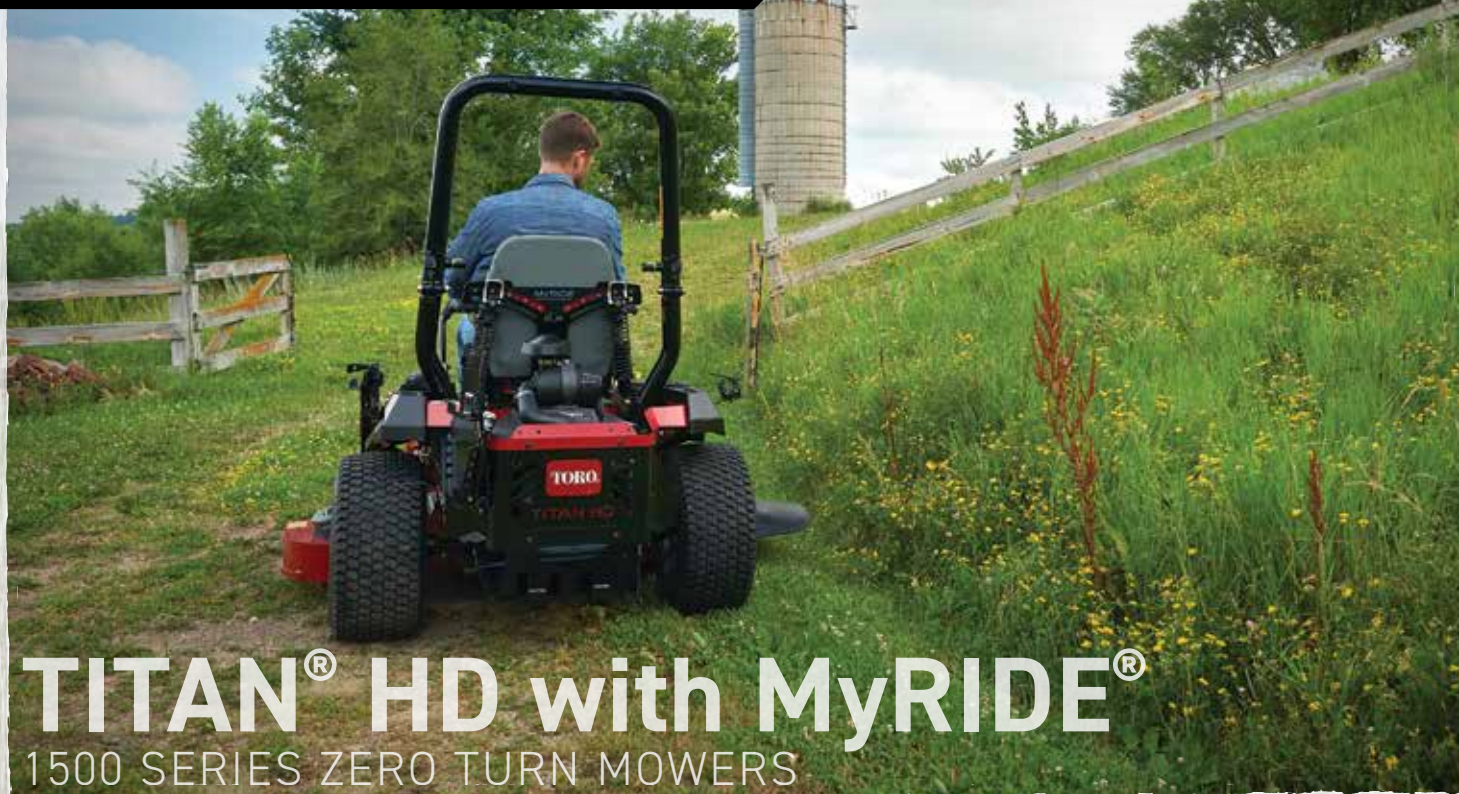

TITAN[®] HD with MyRIDE[®]

1500 SERIES ZERO TURN MOWERS

MORE THAN A MOWER

The TITAN[®] HD Series with MyRIDE[®] delivers durability, professional results and unmatched comfort, all at an outstanding value for acreage owners and budget-minded pros. Tackle your toughest jobs, on or off the mower, with the all-new tool-mounting capability, bringing unmatched utility and productivity right to your fingertips.

- ✓ **ENHANCED COMFORT** The MyRIDE[®] suspended operator platform allows for 7.6 cm of travel, isolating bumps and vibrations from the operator. For a more personalized ride the operator can easily and quickly adjust rear shock ride settings to account for their personal ride preference, without the use of tools, resulting in a superior ride.
- ✓ **TURBO FORCE[®] CUTTING DECKS** Landscape professionals worldwide rely on Toro's TURBO FORCE[®] decks for outstanding quality of cut and durability. Nothing cuts as well as TURBO FORCE.
- ✓ **COMMERCIAL-GRADE DURABILITY** From the durable 7/10-gauge high strength steel TURBO FORCE cutting deck, to the rugged 7.62 cm x 5.08 cm durable frame and commercial-grade engine with heavy duty Donaldson[®] air canister, the TITAN[®] HD with MyRIDE is built to last.




MYRIDE[®] MAXIMUM COMFORT

The MyRIDE Suspension System features a suspended operator platform and adjustable rear shocks to provide a superior ride.



TORO® COMMERCIAL-GRADE ENGINES

Powerful Toro commercial-grade engines provide professional quality performance. Heavy-duty Donaldson® canister style air filtration system protects the engine from contaminants and prolongs product life.

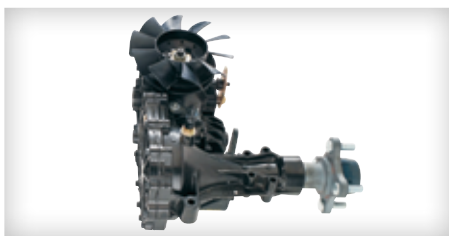

COMMERCIAL-GRADE HYDRAULICS

The integrated pump and wheel motor uses proven commercial hydraulic components while eliminating hoses and other potential leak points. You'll get a smoother, faster response while enjoying an even more reliable machine.



TURBO FORCE® CUTTING DECKS

Landscape professionals worldwide rely on Toro's patented TURBO FORCE® decks for outstanding quality of cut and durability. Nothing cuts as well as TURBO FORCE.



TOUGH SPINDLES

Cast aluminum sealed spindles survive impacts that would destroy lesser spindles, thanks to a stout cast iron housing and massive base.

RECYCLER KIT

110-2080 (74534TE & 74540TE)
110-2070 (74536TE)
115-7466 (74504TE)
134-3217 (74540TE)
134-3259 (74542TE)

TITAN® HD with MyRIDE® ACCESSORIES



BUCKET MOUNT
136-1654



TRIMMER MOUNT
136-1682



RECYCLER KIT
126-8701 (74453TE)
126-8702 (74454TE)



UNIVERSAL TOOL MOUNT
136-9046



TRIPLE THREAT KIT
136-9047 (Includes bucket holder, universal mount, and trimmer mount)

SPECIFICATIONS

| MODEL | 74453TE - MyRIDE® | 74454TE - MyRIDE® |
|-----------------|--|--|
| CUTTING WIDTH | 122 cm (48") | ▶ 132 cm (52") |
| DEFLECTOR WIDTH | 160 cm (63") | ▶ 172 cm (68") |
| ENGINE | TORO® 708cc, 24.5 hp (18.3 kW) | TORO® 708cc, 24.5 hp (18.3 kW) |
| GROUND SPEED | 0 - 13 km/h (0 - 8 mph) | 0 - 13 km/h (0 - 8 mph) |
| DECK TYPE | TURBO FORCE® Side Discharge | TURBO FORCE Side Discharge |
| DECK HEIGHT | 127 mm (5") | 127 mm (5") |
| HEIGHT OF CUT | 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") |
| ROPS | Folding | Folding |
| DECK SPINDLES | 20.3 cm (8") Cast Aluminum, Sealed; 2.5 cm (1") shaft | 20.3 cm (8") Cast Aluminum, Sealed; 2.5 cm (1") shaft |
| DRIVE TYRES | 56 cm x 24 cm x 30 cm (22" x 9.5" - 12") | 56 cm x 24 cm x 30 cm (22" x 9.5" - 12") |
| CASTER TYRES | 33 cm x 16.5 cm - 15 cm (13" x 6.5" - 6") Flat-free Semi-Pneumatic | 33 cm x 16.5 cm - 15 cm (13" x 6.5" - 6") Flat-free Semi-Pneumatic |
| FUEL/CAPACITY | Petrol/26.5 litres (7 gal) | Petrol/26.5 litres (7 gal) |
| WEIGHT | 421 kg (928 lbs) | 429 kg (946 lbs) |

Featured

ZERO TURN MOWER COLLECTION

6000 SERIES

Z MASTER® PROFESSIONAL ZERO TURN MOWERS

MASTER THE TOUGHEST JOB CONDITIONS

The Toro® Z Master Professional 6000 Series is the next generation of petrol powered zero-turn radius mowers.


Building on industry leading performance features like TURBO FORCE® cutting technology, the toughest spindle assemblies and more, Toro has added improved comfort, enhanced traction and control plus additional professional features. The Z Master Professional 6000 Series models have a low center of gravity, adding more stability for improved handling on slopes and superior manoeuvrability.

- ✓ **HANDLE DEMANDING CONDITIONS** with a choice of powerful engines.
- ✓ **REDUCE OPERATOR FATIGUE** with a thick, cushioned, deluxe suspension seat and 3-D isolator mounts that absorb vibrations.
- ✓ **EASE OVER BUMPS** with the convenient foot-pedal deck lift.
- ✓ **OUTSTANDING STABILITY** with a low centre of gravity enhances handling on hills.
- ✓ **SMOOTH AND POWERFUL RESPONSE** from unitised pump and wheel motors.
- ✓ **ABSORB IMPACT** eliminate deck sway and get a clean cut on hillsides with the robust deck hanging system.



MyRIDE® SUSPENSION SYSTEM

Long days will feel short with the all-new amazingly comfortable MyRIDE® suspension system (72969TE only). The fully suspended, adjustable operator platform isolates bumps and vibrations so you don't feel the rough terrain. It's the Toro toughness you expect with a ride you won't believe.

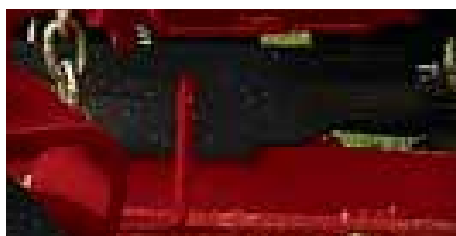

TURBO FORCE® CUTTING DECKS

Feature 6 mm thick heat-treated steel blades. Nothing cuts as fast or as well.



TOUGH SPINDLES

Cast aluminum greaseless spindles survive impacts that would destroy lesser spindles, thanks to a stout cast iron housing and massive base.



COMFORTABLE RIDE

With a deluxe suspension seat that features thick cushions, large bolsters and 3-D isolator mounts that absorb bumps and vibrations to reduce operator fatigue.



DECK LIFT ASSIST

Adjusts the deck height quickly and easily with the standard deck lift assist foot pedal.



PERSONALISED RIDE SETTINGS*

Allows the operator to easily and quickly adjust their ride settings to account for their personal ride preferences, without tools. (MyRIDE® - 72969TE only)



MAXIMUM COMFORT*

The fully suspended operator platform allows for 91mm of travel and reduces impacts, bumps and vibrations that reach the operator, resulting in a superior ride. (MyRIDE® - 74969TE only)

6000 SERIES ACCESSORIES



**OPERATOR
CONTROLLED
DISCHARGE CHUTE**
117-3600



HITCH KIT
109-9487



RECYCLER KITS
115-7466 (122cm)
115-7467 (132cm)
115-7468 (152cm)
125-9305 (152cm, RD)

SPECIFICATIONS

| MODEL | 72902TE | 72969TE* - MyRIDE® | 72925TE | 72942TE |
|-----------------|---|---|--|--|
| CUTTING WIDTH | 122 cm (48") | 132 cm (52") | ▶ 152 cm (60") | 152 cm (60") |
| DEFLECTOR WIDTH | 160 cm (63") | 172 cm (68") | ▶ 192 cm (76") | 168 cm (66") |
| ENGINE | Kawasaki, 726 cc, FX651V, 15.3 kW (20.5 hp) | Kawasaki, 726 cc, FX691V, 16.4 kW (22 hp) | Kawasaki, 852 cc, FX801V, 19 kW (25.5 hp) | Kawasaki, 852 cc, FX801V, 19 kW (25.5 hp) |
| GROUND SPEED | 0-16 km/h (0- 10mph) | 0-16 km/h (0- 10mph) | ▶ 0-18.5 km/h (0- 11.5mph) | 0-18.5 km/h (0- 11.5mph) |
| DECK TYPE | TURBO FORCE Side Discharge | TURBO FORCE Side Discharge | TURBO FORCE Side Discharge | TURBO FORCE ▶ Rear Discharge |
| DECK HEIGHT | 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") |
| HEIGHT OF CUT | 25-140 mm (1" - 5.5") | 25-140 mm (1" - 5.5") | 25-140 mm (1" - 5.5") | 25-140 mm (1" - 5.5") |
| SPINDLES | Cast Aluminum, Greaseless | Cast Aluminum, Greaseless | Cast Aluminum, Greaseless | Cast Aluminum, Greaseless |
| DRIVE TYRES | Turf Master® 61 x 24 - 30.5 (24" x 9.5" - 12") | Turf Master 61 x 24 - 30.5 (24" x 9.5" - 12") | Turf Master 61 x 30.5 - 30.5 (24" x 12" - 12") | Turf Master 61 x 30.5 - 30.5 (24" x 12" - 12") |
| CASTER TYRES | 33 x 12.5 - 15 (13" x 5" - 6") Flat-free Semi-Pneumatic | 33 x 16.5 - 15 (13" x 6.5" - 6") Flat-free Semi-Pneumatic | Multi Trac 33 x 16.5 - 15 (13" x 6.5" - 6") Flat-free Semi-Pneumatic | Multi Trac 33 x 16.5 - 15 (13" x 6.5" - 6") Flat-free Semi-Pneumatic |
| FUEL/CAPACITY | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) |
| WEIGHT | 508 kg (1120 lbs) | 553 kg (1219 lbs) | 569 kg (1255 lbs) | 588 kg (1296 lbs) |

Featured

ZERO TURN MOWER COLLECTION



7000 SERIES

Z MASTER® PROFESSIONAL DIESEL ZERO TURN MOWERS

DOMINATE THE MOST DEMANDING JOBS

It's 7 a.m. The grass is long and wet. And you've got five more properties to mow after this one. At times like these, you don't want a struggle. You need power. Toro's Professional 7000 Series gives you the torque to take on extreme mowing conditions that would max out a conventional petrol-powered mower. Better yet, it runs on diesel, so you get more power with less fuel than a comparable petrol engine.

- ✓ **POWER THROUGH** the toughest conditions with the high-torque 3-cylinder diesel engine.
- ✓ **RESIST DAMAGE** from debris with the rugged deck made of 7 gauge, high-strength steel.
- ✓ **BIODIESEL COMPATIBLE** fuel pump, fuel filter and fuel lines.
- ✓ **SURVIVE IMPACTS** that could destroy lesser spindles with Toro's robust spindle assemblies.
- ✓ **SAVE DOWNTIME** with flat-free, semi-pneumatic caster tyres.
- ✓ **REDUCE OPERATOR FATIGUE** with a thick, cushioned, deluxe suspension seat that absorbs vibrations.



TURBO FORCE® DECK

Works with the high-torque diesel engine for outstanding results at higher ground speeds.



DIESEL ENGINES

Lower fuel consumption and are more efficient than comparable petrol engines. Diesel fuel also contains about 18% more energy by volume for extra power.



LIQUID-COOLED ENGINE SYSTEM

Extends engine life with cleaner combustion. Plus, a well-balanced engine keeps vibration to a minimum.



BIODIESEL READY ENGINES

Accept up to 20% biodiesel (B20) fuel blends, which can cut emissions nearly in half vs. traditional diesel fuel (based on EPA-designed engine tests)



TOUGH SPINDLES

Cast aluminum sealed spindles survive impacts that would destroy lesser spindles, thanks to a stout cast iron housing and massive base.

7000 SERIES ACCESSORIES



RUBBER STRIPING KIT

107-1630

ROLLER STRIPING KIT

108-2162



OPERATOR CONTROLLED DISCHARGE CHUTE KIT

117-3600

RECYCLER KITS

107-1610 (74264TE)

114-1820 (74279TE)

107-1611 (74265TE)

SPECIFICATIONS

| MODEL | 72279TE | 72264TE | 72265TE |
|-----------------|--|--|--|
| CUTTING WIDTH | 132 cm (52") | 132 cm (52") | ▶ 152 cm (60") |
| DEFLECTOR WIDTH | 173 cm (68") | 173 cm (68") | ▶ 193 cm (76") |
| ENGINE | Kubota®, 898 cc, 23 hp (16.6kW) , Diesel | Kubota, 898 cc, 23 hp (16.6kW) , Diesel | Kubota, 898 cc, 23 hp (16.6kW) , Diesel |
| GROUND SPEED | 0-18 km/h (11 mph) | 0-18 km/h (11 mph) | 0-18 km/h (11 mph) |
| DECK TYPE | TURBO FORCE® Rear Discharge | TURBO FORCE Side Discharge | TURBO FORCE Side Discharge |
| DECK HEIGHT | 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") |
| HEIGHT OF CUT | 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") |
| SPINDLES | Cast Aluminum, Sealed | Cast Aluminum, Sealed | Cast Aluminum, Sealed |
| DRIVE TYRES | 58 x 24 - 30 cm; 4-ply (23" x 9.5 - 12") 4-ply | 58 x 24 - 30 cm; 4-ply (23" x 9.5 - 12") 4-ply | ▶ 61 x 30 - 30 cm; 4-ply (24" x 12" - 12") 4-ply |
| CASTER TYRES | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-free Semi-Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-free Semi-Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-free Semi-Pneumatic |
| FUEL/CAPACITY | Diesel/ 45 litres (12 gal) | Diesel/ 45 litres (12 gal) | Diesel/ 45 litres (12 gal) |
| WEIGHT | 733 kg (1616 lbs) | 733 kg (1616 lbs) | 722 kg (1520 lbs) |

Featured

ZERO TURN MOWER COLLECTION

8000 SERIES

Z MASTER® PROFESSIONAL DIRECT COLLECT MOWER

THE PERFECT ANSWER FOR A PERFECT CUT

For high-end properties, a clean, manicured look is everything. The 8000 Series Z Master® delivers a superior quality of cut and a refined finish at more productive mowing speeds.

A powerful blower moves more air, allowing large volumes of material to be thrown into the hopper.

The rear-discharge deck lets you trim on either side while keeping flower beds and walkways grass cuttings -free. And the high-capacity collection system helps extend mowing time. With ground speeds up to 8 km/h, the 8000 Series is the answer for a perfect cut in less time.

- ✓ **TRIM ON BOTH SIDES** with the rear direct collect deck to keep flower beds and walkways clipping-free.
- ✓ **SLICE GRASS INTO FINE PARTICLES** with a higher blade tip speed and optimal recycling kits for a consistent, high-quality cut.
- ✓ **REDUCE DOWNTIME** with features that reduce maintenance including a heavy-duty sealed gearbox and a simple, reliable belt drive system.
- ✓ **MOW LONGER** with the 28 litre fuel tank and the high-capacity collection system for bagging and mulching for fewer stops.
- ✓ **GAIN PRODUCTIVITY** with a ground speed of up to 8 kph and a hydro drive system for efficient, precise control.





FILL-REDUCTION SYSTEM

Switches from 100% bagging to 50% recycling and 50% bagging, so the hopper can be emptied less frequently.



EFFORTLESS CONTROLS

Enable you to manoeuvre in tight spots almost effortlessly.



OUT FRONT DECK DESIGN

Allows for more manoeuvrability and mowing in tighter areas where traditional zero turns can't.



HIGH CAPACITY HOPPER

Means less time emptying and more time mowing. Exclusive baffle design fills the 33 cm³ hopper evenly back to front for maximum efficiency.



TOUGH, DEEP DECKS

Made of welded 7/10-gauge steel, the deep 11.7 cm design handles taller grass and provides greater vacuum for a clean, refined cut.



REAR DISCHARGE DECK

Allows for trimming on either side, keeping flower beds and walkways clipping-free.

8000 SERIES ACCESSORIES

**MULCHING KIT
(INCLUDING BLADES)**
130-8463

ROPS KIT
130-8459

LIGHT KIT
130-8469

HOPPER LATCH KIT
130-8488

SPECIFICATIONS

| MODEL | 74311TE |
|-----------------|--|
| CUTTING WIDTH | 122 cm (48") |
| DEFLECTOR WIDTH | N/A |
| ENGINE | 20.5 HP Kohler Command Pro 640cc |
| GROUND SPEED | 0-8 km/hr (0-5 mph) |
| DECK TYPE | Commercial rear discharge deck |
| DECK HEIGHT | 188 mm (7.5") |
| HOC | 25 - 100 mm (1"-4") |
| DRIVE TYRES | 45.5 x 25.5 - 26.5 cm (18" x 10" - 10.5") |
| CASTER TYRES | 20 X 7.5 - 10 cm (8" x 3" - 4") Semi Pneumatic |
| FUEL/CAPACITY | Petrol/ 28 litres (7.5 gal) |
| WEIGHT | 544 kg (1199 lbs) |



Featured Products

SIMPLE SELECTION

Compare key features to help find the mowers that fit your application.



| MODEL | HD PROLINE 22291 | HD PROLINE 22280 | NEW! TURFMASTER™ 22207 | PROSTRIPE® 02657 |
|---------------------|--|--|---|--|
| CUTTING WIDTH | 53 cm (21") | 53 cm (21") | ▶ 76 cm (30") | 56 cm (22") |
| ENGINE | Kawasaki®, 4-cycle, 179 cc, FJ180V KAI | Kawasaki, 4-cycle, 179 cc, FJ180V KAI | Kawasaki, 4-cycle, 179 cc, FJ180V KAI | Kawasaki® FJ180V KAI OHV 4-cycle, 179cc |
| STARTER | Recoil, Zone Start | Recoil, Blade Brake Clutch (BBC) | Recoil, Blade Brake Clutch (BBC) | Recoil, ZS, Blade Brake Clutch BBC |
| DRIVE SYSTEM | Fixed speed, RWD | ▶ 3-speed, RWD | Heavy Duty Variable Speed RWD | 3-Speed Self Propelled |
| DECK TYPE | Recycler/Rear Bag, Aluminium | Recycler/Rear Bag, Aluminium | ▶ Steel & Aluminium - Recycler/Rear Bag/Side Discharge | Rear Bag, Aluminum |
| HOC | 25 mm - 114 mm (1" - 4.5"), 4 point | 25 mm - 114 mm (1" - 4.5"), 4 point | ▶ 38 mm - 127 mm (1.5" - 5") in 13 mm (0.5") increments | 13-position, 13-60mm 3.25mm increments |
| SPEED | 0-6.0 km/h (0-3.7 mph) forward | 0-6.0 km/h (0-3.7 mph) forward | Variable up to 6.4 km/h (3.98 mph) forward | 3.0; 4.0; 5.2 km/h (1.9; 2.5; 3.2 mph) |
| FUEL/CAPACITY | Petrol / 1.9 litres (0.5 gal) | ▶ Petrol / 3.8 litres (1 gal) | Petrol / 3.8 litres (1 gal) | Petrol / 1.7 litres (0.45 gal) |
| HAND ARM VIBRATION | 2.7 m/s ² | 2.7 m/s ² | 6.2 m/s ² | — |
| WEIGHT | 50 kg (110 lbs) | 56 kg (124 lbs) | 85 kg (187 lbs) | 66 kg (146 lbs) |
| TYRES | 23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels | 23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels | 23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels | 27 cm x 8 cm (10.5"x 3") Rubber tyres with cast wheels |
| REAR ROLLER | — | — | — | 13 cm (5") Steel ribbed roller |
| DRIVE TYRES | 23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels | 23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels | 27 cm x 8 cm (10.5"x 3") Rubber tyres with cast wheels | — |
| MOWING DECKS | | | | |
| DECK CONSTRUCTION | Corrosion resistant 6 mm (0.24") aluminium | Corrosion resistant 6 mm (0.24") aluminium | ▶ 13 gauge heavy duty steel, cast aluminium frame | Corrosion resistant 6 mm (0.24") aluminium |
| BLADES | 3.4 mm (0.13") thick steel with blade stiffener | 3.4 mm (0.13") thick steel with blade stiffener | 3.4 mm (0.13") thick steel with blade stiffener | 3.4 mm (0.13")thick swaged steel blade |
| BLADE ENGAGEMENT | Zone Start (ZS) | ▶ Blade Brake Clutch (BBC) | Blade Brake Clutch (BBC) | Blade Brake Clutch (BBC) |
| LUBRICATION | Forced splash lubrication | Full-pressure lubrication (with oil filter) | Full-pressure lubrication (with oil filter) | Forced lubrication w/oil pump |
| AIR FILTER | Dual Element | Dual Element | Dual Element | Dual Element |
| BAG CAPACITY | 77 litres (20 gal) | 77 litres (20 gal) | ▶ 88 litres (23 gal) | 80 litres (21 gal) |
| COMMERCIAL WARRANTY | 1 Year, Full Coverage, 2 Year, GTS** | 1 Year, Full Coverage, 2 Year, GTS** | 1 Year, Full Coverage, 2 Year, GTS** | 2 year limited warranty* |

* Refer to Operator's Manual for further details.

** GUARANTEED TO START. Refer to Operator's Manual for further details.



| MODEL | HOVERPRO 400 02615 | HOVERPRO 450 02612 | HOVERPRO 500 02604 | HOVERPRO 550 02606 |
|------------------------------|---------------------------|----------------------------|------------------------------|------------------------------|
| ENGINE | Honda GXV57 | Honda GCV -160 OHC | Honda GCV-160 OHC | Honda GCV-160 OHC |
| DRIVE SYSTEM | Push | Push | Push | Push |
| CUTTING WIDTH | 40 cm (16") | › 46 cm (18") | › 51 cm (20") | › 53 cm (21") |
| CUTTER SYSTEM | Nylon Line | Nylon Line | › Steel Cutting Blade | Steel Cutting Blade |
| HEIGHT OF CUT/ ADJUSTMENT | 18 - 30 mm (0.7" - 1") | 18 - 30 mm (0.7" - 1") | 16 - 34 mm (0.63" x 1.5") | 16 - 34 mm (0.63" x 1.5") |
| FUEL CAPACITY | 0.27 litres (0.1 gal) | › 0.77 litres (0.2 gal) | 0.77 litres (0.2 gal) | 0.77 litres (0.2 gal) |
| SLOPE ANGLE | 25° | › 45° | 45° | 45° |
| WEIGHT | 12.5 kg (28 lbs) | 17.6 kg (39 lbs) | 19 kg (42 lbs) | 19 kg (42 lbs) |

USER-FRIENDLY FEATURES

| | | | | |
|--------------------------------|----------------|----------------|----------------|----------------|
| RECOIL START | Standard | Standard | Standard | Standard |
| FOLDING HANDLEBAR | Standard | Standard | Standard | Standard |
| QUICK STORAGE HANDLEBAR | Standard | Standard | Standard | Standard |
| HEIGHT ADJUSTABLE HANDLEBAR | Standard | Standard | Standard | Standard |
| SOFTGRIP HANDLEBAR | Standard | Standard | Standard | Standard |
| OPERATOR PRESENCE CONTROL | Standard | Standard | Standard | Standard |
| EXTENSION HANDLEBAR - KIT | — | › Optional | Optional | Optional |
| TRANSPORT WHEELS - KIT | — | › Optional | Optional | Optional |
| HI-RISE - KIT | Optional | Optional | — | — |
| COMMERCIAL WARRANTY | 2 year limited | 2 year limited | 2 year limited | 2 year limited |

Featured Products

SIMPLE SELECTION

Compare key features to help find the mowers that fit your application.



| MODEL | NEW! HYDRAULIC SEEDER* 23508 | NEW! STAND-ON AERATOR** 29516 | POWER BROOM 38700 |
|----------------------|---|---|---|
| ENGINE | Kohler® Command PRO® CH395 | Kohler® CH440 | Kohler Command Pro Multi-Season |
| FUEL CAPACITY | 6 L (1.5 gal) | 7 L (1.85 gal) | 4 L (1 gal) |
| WORKING WIDTH | 51 cm (20") | 61 cm (24") | 91 cm (36") |
| DEPTH | Up to 2.5 cm (1") | Up to 12.7 cm (5") | - |
| WIDTH | 76 cm (30") | 90 cm (35.5") | 118 cm (46.5") |
| HEIGHT | 71 cm (28") (handle folded) 114 cm (45") (handle working) | 130 cm (51") | 105.5 cm (41.5") |
| LENGTH | 96.5 cm (38") (handle folded) 137 cm (54") (handle working) | 174 cm (68.6") | 185 cm (73") |
| WEIGHT | 122 kg (270 lbs) | 388 kg (856 lbs) | 159 kg (350 lbs) |
| GROUND SPEED | Up to 4.5 km/h (3 mph) fwd Up to 3.5 km/h (2 mph) rev | Up to 11 km/h (7 mph) fwd Up to 3.5 km/h (2 mph) rev | Up to 9.5 km/h (6 mph) fwd, Up to 3.0 km/h (2 mph) rev |
| HOPPER/TANK CAPACITY | 18 kg (40 lbs) | - | - |
| TINES/BLADES/BROOM | 10 verticutting blades | 36 tines | 18 broom wafers |
| COMMERCIAL WARRANTY | 1 year unit coverage, 2 year engine coverage through manufacturer | | |

| MODEL | BRC-28 BRUSH CUTTER 23522 |
|---------------------|--|
| ENGINE | Toro 14.5 hp, Electric Start |
| FUEL CAPACITY | 4 L (1 gal) |
| CUTTING WIDTH | 71 cm (28") |
| CUTTING HEIGHT | 9.5 cm (3.75") |
| WIDTH | 76 cm (30") |
| HEIGHT | 106.5 cm (42") |
| LENGTH | 221 cm (87") |
| WEIGHT | 170 kg (375 lbs) |
| GROUND SPEED | Push propelled |
| DECK | 50 ksi high strength steel Pivoting +/- 10 degrees w/spring return |
| ELECTRIC START | Standard |
| SPINDLE DIAMETER | 6 cm (2.5") |
| TRANSAXLE | Hydro-Gear T2 |
| TYRES | Sealant filled |
| TINES/BLADES/BROOM | 1 blade |
| COMMERCIAL WARRANTY | 1 year unit coverage, 2 year engine coverage through manufacturer |



| MODEL | MID-SIZE HYDRO UNIT 31914 | NEW! MID-SIZE HYDRO UNIT 44410TE | NEW! MID-SIZE HYDRO UNIT 44424TE | MID-SIZE T-BAR GEAR 30070 | MID-SIZE T2 HYDRO 30071 |
|-----------------------------|--|--|--|--|--|
| CUTTING WIDTH | ► 81 cm, 91 cm, 122 cm (32", 36" or 48") | 91 cm (36") | 122 cm (48") | 91 cm (36") | 91 cm (36") |
| ENGINE | Kawasaki, 4-cycle, 603 cc, FS541V, OHV V-Twin, 11.2kW (15 hp) | Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled 10.8kW (14.5 hp) | Kawasaki, 4-cycle, 603 cc, FS541V, OHV V-Twin, 11.2kW (15 hp) | Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled 10.8kW (14.5 hp) | Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled 10.8kW (14.5 hp) |
| STARTER | ► Electric | Electric | Electric | Recoil | Recoil |
| DRIVE SYSTEM | Twin Hydro-gear® pumps with Parker® wheel motors | Twin Hydro-gear® pumps | Twin Hydro-gear® pumps | Peerless® 5-speed, with reverse | Twin Hydro-gear® pumps with Parker wheel motors |
| DECK TYPE | TURBO FORCE® Rear Discharge or Flail | TURBO FORCE® Side Discharge, Recycler (optional) | TURBO FORCE Side Discharge, Recycler (optional) | ► TURBO FORCE® Side Discharge, Recycler | TURBO FORCE® Side Discharge, Recycler |
| HOC | Rear Discharge: 25 - 108 mm (1" - 4.25") Flail: 12 - 140 mm (0.5" - 5.5") | 38 - 114 mm (1.5" - 4.5") | 38 - 114 mm (1.5" - 4.5") | 25 - 114 mm (1" - 4.5") | 25 - 114 mm (1" - 4.5") |
| SPEED | ► Forward: 0 - 9.6 km/h; (0 - 6mph) Reverse: 0 - 3.2 km/h (0 - 2mph) | Forward: 0 to 11 km/h (0 - 7mph); Reverse: 0 to 4.8 km/h (0 - 3mph) | Forward: 0 - 11 km/h (0 - 7mph); Reverse: 0 - 4.8 km/h (0 - 3mph) | Forward: 0 - 7.5 km/h (0 - 5 mph) Reverse: 3.7 km/h (0 - 2mph) | Forward: 0 - 8 km/h (0 - 5 mph); Reverse: 0 - 3.2 km/h (0 - 2mph) |
| CONTROL SYSTEM | Pistol Grips | Twin Lever | Twin Lever | T-Bar | Twin Lever |
| DRIVE TYRES | 40.5 x 19 - 20.5 (16" x 7.5" - 8") Turf Master | 45.5 x 15 - 20.5 (18" x 6" - 8") | 51 x 20.5 - 24 cm (20" x 8" - 9.5") | 40,5 x 16,5 - 20,5 cm (16" x 6,5" - 8") 4-ply ProTech | 40,5 x 16,5 - 20,5 cm (16" x 6,5" - 8") 4-ply ProTech |
| CASTER TYRES | 23 x 9 - 10 cm (9" x 3.5" - 4") Flat -Free Semi-Pneumatic | 23 x 9 - 10 cm (9" x 3.5" - 4") Smooth | 28 x 10 - 12,5 cm (11" x 4" - 5") Smooth | 23 x 9 - 10 cm (9" x 3.5" - 4") 4-ply smooth with greaseable bearings | 23 x 9 - 10 cm (9" x 3.5" - 4") 4-ply smooth with greaseable bearings |
| FUEL/CAPACITY | ► Petrol / 19 litres (5 gal) | Petrol / 19 litres (5 gal) | Petrol / 19 litres (5 gal) | Petrol / 19 litres (5 gal) | Petrol / 19 litres (5 gal) |
| WEIGHT | 129 kg (284 lbs) | 270 kg (595 lbs) | 294 kg (648 lbs) | 267 kg (589 lbs) | 303 kg (668 lbs) |
| MOWING DECKS | | | | | |
| DECK CONSTRUCTION | ► 2, 3 or 4 blade, 7-gauge welded construction | 2 blade, 10-gauge welded construction | 2 blade, 10-gauge welded construction | 2 blade, 7-gauge welded construction | 2 blade, 7-gauge welded construction |
| BULL-NOSE BUMPER | - | Standard | Standard | ► Standard | Standard |
| ADJUSTABLE DISCHARGE BAFFLE | - | - | - | ► Standard, tools-free | Standard, tools-free |
| RUBBER DISCHARGE CHUTE | - | Standard | Standard | ► Standard | Standard |
| SPINDLE HOUSING | 24 cm (9.5") diameter cast iron | 19.7 cm (7.75") diameter cast aluminum | 19.7 cm (7.75") diameter cast aluminum | 24 cm diameter cast iron | 24 cm (9.5") diameter cast iron |
| SPINDLE BEARING | Sealed ball bearings | Sealed ball bearings | Sealed ball bearings | Sealed ball bearings | Sealed ball bearings |
| BLADES | Deck 02710: (2) 5.2 mm Decks 02711& 020712 (3) 6.3mm | 6.4 mm (0.25") heat-treated steel | 6.4 mm (0.25") heat-treated steel | (2) 6 mm (0.24") heat-treated steel | (2) 6 mm (0.24") heat-treated steel |
| LUBRICATION | Full-pressure lubrication (with oil filter) | Full-pressure lubrication (with oil filter) | Full-pressure lubrication (with oil filter) | Full-pressure lubrication (with oil filter) | Full-pressure lubrication (with oil filter) |
| AIR FILTER | Dual Element | Dual Element | Dual Element | Dual Element | Dual Element |
| BAG CAPACITY | - | Optional 106 litre (28 gal) | Optional 106 litre (28 gal) | Optional 106 litre (28 gal) | Optional 106 litre (28 gal) |
| COMMERCIAL WARRANTY | 2 Year | 2 Year | 2 Year | 2 Year | 2 Year |

Featured Products

SIMPLE SELECTION

Compare key features to help find the mowers that fit your application.



74542TE

NEW!



74453TE

| MODEL | GRANDSTAND 74534TE | NEW! GRANDSTAND 74540TE | GRANDSTAND 74536TE | GRANDSTAND 74504TE | NEW! GRANDSTAND 74542TE | TITAN® HD 1500 SERIES WITH MYRIDE® 74453TE | TITAN HD 1500 SERIES WITH MYRIDE® 74454TE |
|---|---|---|---|---|---|---|---|
| CUTTING WIDTH | 91 cm (36") | 91 cm (36") | ▶ 102 cm (40") | ▶ 122 cm (48") | 122 cm (48") | 122 cm (48") | ▶ 132 cm (52") |
| DEFLECTOR WIDTH | 131 cm (52") | 96 cm (38") | 141 cm (56") | 160 cm (63") | 127 cm (50") | 160 cm (63") | ▶ 172 cm (68") |
| ENGINE | Kawasaki®, 603 cc, FS541V | Kawasaki, 603 cc, FS541V | Kawasaki, 603 cc, FS541V | Kawasaki, 726 cc, FX691V | Kawasaki, 726 cc, FX691V | TORO® 708cc, 24.5 hp (18.3 kW) | TORO® 708cc, 24.5 hp (18.3 kW) |
| GROUND SPEED | 0 - 8 km/h (0 - 5 mph) | 0 - 8 km/h (0 - 5 mph) | 0 - 8 km/h (0 - 5 mph) | ▶ 0 - 12 km/h (0 - 7.5 mph) | 0 - 12 km/h (0 - 7.5 mph) | 0 - 13 km/h (0 - 8 mph) | 0 - 13 km/h (0 - 8 mph) |
| DECK TYPE | TURBO FORCE Side Discharge | TURBO FORCE Rear Discharge | TURBO FORCE Side Discharge | TURBO FORCE Side Discharge | TURBO FORCE Rear Discharge | TURBO FORCE® Side Discharge | TURBO FORCE Side Discharge |
| DECK HEIGHT | 127 mm (5") | 127 mm (5") | 127 mm (5") | 140 mm (5.5") | 140 mm (5.5") | 127 mm (5") | 127 mm (5") |
| HOC | 25 - 127 mm (1" - 5") | 25 - 127 mm (1" - 5") | 25 - 127 mm (1" - 5") | 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") |
| SPINDLE BEARINGS | Sealed | Sealed | Sealed | Sealed | Sealed | Cast Aluminum, Sealed | Cast Aluminum, Sealed |
| DRIVE TYRES | Turf Master® 46 x 22 - 20 (18" x 8.5" - 8") | Turf Master 46 x 24 - 20 (18" x 9.5" - 8") | Turf Master 46 x 24 - 20 (18" x 9.5" - 8") | ▶ Turf Master 51 x 25 - 20 (20" x 10" - 8") | Turf Master 51 x 25 - 20 (20" x 10" - 8") | 56 x 24 - 30 (22" x 9.5" - 11.5") | 56 x 24 - 30 (22" x 9.5" - 11.5") |
| CASTER TYRES | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 28 x 10 - 12.5 cm (11" x 4" - 5") Flat-free Semi-Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-free Semi-Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-free Semi-Pneumatic |
| FUEL/CAPACITY | Petrol, 29.5 litres (8 gal) | Petrol, 29.5 litres (8 gal) | Petrol, 29.5 litres (8 gal) | ▶ Petrol, 38 litres (10 gal) | Petrol, 38 litres (10 gal) | Petrol/ 26.5 litres (7 gal) | Petrol/ 26.5 litres (7 gal) |
| WEIGHT | 343 kg (756 lbs) | 352 kg (776 lbs) | 351 kg (774 lbs) | 407 kg (897 lbs) | 415 kg (915 lbs) | 421 kg (928 lbs) | 429 kg (946 lbs) |
| HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV) | 10 cc/rev pump | 10 cc/rev pump | 10 cc/rev pump | 10 cc/rev pump | 10 cc/rev pump | 12 cc/rev pump | 12 cc/rev pump |

MOWING DECKS

| | | | | | | | |
|-----------------------------------|---|---|---|---|---|---|---|
| ADJUSTABLE DISCHARGE BAFFLE | Standard, Tools Free | N/A | Standard, Tools Free | Standard, Tools Free | N/A | Standard, Tools Free | Standard, Tools Free |
| OPERATOR COMFORT | Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start. | Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start. | Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start. | Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start. | Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start. | Isolation Seat, Arm rests, Heavy Duty Canister Air Cleaner, Two-Position Folding ROPS, Beverage Holder, Storage Compartments, Z stand Standard | Isolation Seat, Arm rests, Heavy Duty Canister Air Cleaner, Two-Position Folding ROPS, Beverage Holder, Storage Compartments, Z stand Standard |
| COMMERCIAL WARRANTY | 5 Year, 1200 Hours | 5 Year, 1200 Hours | 5 Year, 1200 Hours | 5 Year, 1200 Hours | 5 Year, 1200 Hours | 4 Year, 500 Hours | 4 Year, 500 Hours |



74942TE



74264TE



74311TE

| Z-MASTER 6000 SERIES 72902TE | Z-MASTER 6000 SERIES WITH MYRIDE® 72969TE | Z-MASTER 6000 SERIES 72925TE | Z-MASTER 6000 SERIES 72942TE | Z-MASTER 7000 SERIES 74279TE | Z-MASTER 7000 SERIES 74264TE | Z-MASTER 7000 SERIES 74265TE | Z-MASTER 8000 SERIES 74311TE |
|--|--|---|---|--|---|---|---|
| 122 cm (48") | 132 cm (52") | ▶ 152 cm (60") | 152 cm (60") | 132 cm (52") | 132 cm (52") | 152 cm (60") | 122 cm (48") |
| 160 cm (63") | 172 cm (68") | ▶ 192 cm (76") | 192 cm (76") | 173 cm (68") | 73 cm (68") | 193 cm (76") | N/A |
| Kawasaki, 726 cc, FX651V, 20.5 hp (15.3 kW) | Kawasaki, 726 cc, FX691V, 22 hp (16.4 kW) | Kawasaki, 852 cc, FX801V, 25.5 hp (19 kW) | Kawasaki, 852 cc, FX801V, 25.5 hp (19 kW) | Kubota®, 898 cc, 16.6kW (23 hp), Diesel | Kubota, 898 cc, 16.6kW (23 hp), Diesel | Kubota, 898 cc, 16.6kW (23 hp), Diesel | Kohler Command Pro 624cc |
| 0 - 16 km/h (0 - 10 mph) | 0 - 16 km/h (0 - 10 mph) | ▶ 0 - 18.5 km/h (0 - 11.5 mph) | 0 - 18.5 km/h (0 - 11.5 mph) | 0 - 18 km/h (0 - 11 mph) | 0 - 18 km/h (0 - 11 mph) | 0 - 18 km/h (0 - 11 mph) | 0 - 8 km/h (0 - 5 mph) |
| TURBO FORCE Side Discharge | TURBO FORCE Side Discharge | TURBO FORCE Side Discharge | TURBO FORCE ▶ Rear Discharge | TURBO FORCE Rear Discharge | TURBO FORCE Side Discharge | TURBO FORCE Side Discharge | Commercial rear discharge deck |
| 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") | 140 mm (5.5") | ▶ 188 mm (7.5") |
| 25 - 140 mm (1" - 5.5") | 25 - 140 mm (1" - 5.5") | 25 - 140 mm (1" - 5.5") | 25 - 140 mm (1" - 5.5") | ▶ 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") | 38 - 127 mm (1.5" - 5") | 25 - 100 mm (1" - 4") |
| Cast Aluminum, Greaseless | Cast Aluminum, Greaseless | Cast Aluminum, Greaseless | Cast Aluminum, Greaseless | Sealed | Sealed | Sealed | N/A |
| Turf Master® 61 x 24 - 30,5 (24" x 9.5" - 12") | Turf Master 61 x 24 - 30,5 (24" x 9.5" - 12") | Turf Master 61 x 30,5 - 30,5 (24" x 12" - 12") | Turf Master 61 x 30,5 - 30,5 (24" x 12" - 12") | Turf Master 4-ply 58 x 24-30,5 (23" x 9.5" - 12") | Turf Master 4-ply 58 x 24 - 30.5 cm (23" x 9.5" - 12") | Turf Master 4-ply 61 x 30 - 30.5 cm (24" x 11.5" - 12") | Multi-trac 45.5 x 26.5 - 25.5 (18" x 10.5" - 10") |
| 33 x 12.5 - 15 cm (13" x 5" - 6") Flat-free Semi- Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-Free Semi-Pneumatic | Multi Trac 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-Free Semi-Pneumatic | Multi Trac 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-Free Semi-Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-Free Semi-Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-Free Semi-Pneumatic | 33 x 15 - 16.5 cm (13" x 6" - 6.5") Flat-Free Semi-Pneumatic | 20 x 7.5 - 10 cm (8" x 3" - 4") Semi Pneumatic |
| Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 45 litres (12 gal) | Petrol/ 28 litres (7.5 gal) |
| 508 kg (1120 lbs) | 553 kg (1219 lbs) | 569 kg (1255 lbs) | 588 kg (1296 lbs) | 733 kg (1616 lbs) | 733 kg (1616 lbs) | 722 kg (1592 lbs) | 544 kg (1199 lbs) |
| 12 cc/rev pump | 12 cc/rev pump | 16 cc/rev pump | 16 cc/rev pump | 16 cc/rev pump | 16 cc/rev pump | 16 cc/rev pump | 12 cc/rev pump |
| Standard, Tools Free | Standard, Tools Free | Standard, Tools Free | N/A | Standard, Tools Free | Standard, Tools Free | Standard, Tools Free | ▶ Fill reduction baffles standard |
| Heavy-Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two-Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design. Z Stand Standard, 3-D Isolation Seat, Arm Rests, Optional Suspension System. | MyRIDE® Suspension system. 3-D Isolation Seat, Arm Rests, Heavy-Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two-Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design. | 3-D Isolation Seat, Arm Rests, Heavy- Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two-Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design. | Heavy-Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two-Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design. 3-D Isolation Seat, Arm Rests, Optional Suspension System. | Drive System: Tandem Hydraulic Pumps; 2 Wheel Motors; Heavy Duty Electromagnetic Clutch; Toro Z Stand; Deluxe Suspension Seat With Armrest; Hour Meter | Drive System: Tandem Hydraulic Pumps; 2 Wheel Motors; Heavy Duty Electromagnetic Clutch; Toro Z Stand; Deluxe Suspension Seat With Armrest; Hour Meter; Optional: DFS Collection & Recycler Kit | Drive System: Tandem Hydraulic Pumps; 2 Wheel Motors; Heavy Duty Electromagnetic Clutch; Toro Z Stand; Deluxe Suspension Seat With Armrest; Hour Meter; Optional: DFS Collection & Recycler Kit | Heavy-Duty Canister Air Cleaner, High capacity 335 L hopper, out front deck design, ability to bag, mulch or both. |
| 5 Year, 1400 Hours | 5 Year, 1400 Hours | 5 Year, 1400 Hours | 5 Year, 1400 Hours | 5 Year, 1200 Hours | 5 Year, 1200 Hours | 5 Year, 1200 Hours | 2 Year, 1200 Hours |

PARTS & SERVICE



EXPERIENCE THE TORO DIFFERENCE... ONLY AT YOUR LOCAL TORO DEALER

When you buy a Toro, you get the total Toro treatment. Your Toro dealer knows how to treat you right. They roll out the red carpet every day to provide you with exceptional customer service, competitive pricing, special financing options and more. Visit your independent dealer for products that cover your needs year-round, or go to toro.com



GENUINE TORO® PARTS

To best protect your investment and maintain optimal performance of your turf equipment, count on Toro genuine parts. When it comes to reliability, Toro delivers replacement parts designed to the exact engineering specifications of our equipment. For peace of mind, insist on Toro genuine parts.



RESPONSIVE TORO DEALERS

Toro dealers have the skills, training and commitment to keep your equipment performing its best. Leveraging their extensive inventory and Toro's industry-leading 98% fill rate on parts, your Toro dealer leads the market in parts availability.

CUSTOMER CARE

Toro has an extensive network of factory trained professional dealers in place to ensure you have the parts and service support needed to keep your Toro product running at peak performance. Visit Toro.com to find your nearest Dealer

CLICK WWW.TORO.COM

Find immediate answers to frequently asked questions and other helpful information, including a dealer locator, parts lookup, product registration, downloadable owner's manuals, safety information, special financing offers and interactive product manuals.

VISIT YOUR LOCAL TORO DEALER

Count on our national network of factory-authorized dealers for genuine Toro parts and service support. Toro landscape contractor equipment dealers regularly undergo extensive technical training to stay knowledgeable about the servicing and operation of new products.

HIGH-PERFORMANCE HYDRO OIL

Toro offers high-performance hydraulic oil specially formulated to maximize our commercial mowers' performance. Compared to other hydraulic oils, Toro HYPR-OIL 500™ offers greater thermal stability, higher shear resistance, and excellent wear protection — all at a similar price. The unique formulation also doubles the service interval to 500 hours on 2009 and later model year equipment, including Z Master® G3 and GrandStand® mowers.



MVP BLADE AND BELT PACKS

Stock up and save with specially priced Toro MVP (Maintenance, Value and Performance) Blade and Belt Packs for most gasoline-powered Toro Z Master® models. Each pack contains a supply of commonly replaced maintenance parts, including three standard blades, one hydraulic oil filter, one deck drive belt and one traction or pump drive belt.

WHY CHOOSE TORO BLADES AND BELTS?

Made specifically for Toro mowers, Toro belts are manufactured to tight tolerances to provide optimum fit, minimize slippage and ensure dependable performance. Toro blades are crafted from heat-treated alloy steel to resist flexing and abrasive wear, as well as to provide a crisp, clean cut.

TORO® TOTAL COVERAGE GUARANTEE

Toro stands behind its equipment with comprehensive warranty coverage (see your Toro dealer for complete details).

- Five-year or 1,200-hour¹ limited warranty on GrandStand® and most Z Master® mowers (four-year or 400-hour¹ limited warranty on other Z Master models), with a two-year commercial engine warranty² and a limited lifetime frame warranty³
- Two-year limited warranty² on mid-size walk-behind mowers
- One-year limited commercial warranty on 53 cm professional walk-behind mowers (2-year limited engine warranty on 53 cm Heavy-Duty models)
- One-year limited warranty on batteries and attachments

¹ Whichever occurs first.

² Some engines used on Toro LCE Products are warranted by the engine manufacturer.

³ Original owner only. Lifetime Frame Warranty — If the main frame, consisting of the parts welded together to form the tractor structure that other components such as the engine are secured to, cracks or breaks in normal use, it will be repaired or replaced under warranty at no cost for parts and labor. Frame failure due to misuse or abuse and failure or repair required due to rust or corrosion are not covered.



SAFETY & TESTING



SAFE PRODUCTS DESIGNED TO PROVIDE PEACE OF MIND

Toro has a longstanding reputation for designing safe products. Just one example: All Toro Z Master® zero-turn riders are equipped with a folding roll-over protection system as a standard feature. All Toro LCE products are CE compliant.



SAFETY EDUCATION FOR YOU AND YOUR EMPLOYEES

At Toro, we produce our mowers with safety in mind and test against rigorous safety standards, but it doesn't stop there. We offer many tools to help train and protect you and your operators — and help safeguard your business. From on-line interactive, multi-lingual manuals and safety quizzes to product safety and training. Please visit the product safety information page on toro.com for more information.



PERFORMANCE EVALUATIONS FOR THE PROS, BY THE PROS

Each new Toro product is subjected to extensive high-tech testing at Toro's corporate headquarters, as well as coast-to-coast field evaluations in various types of turf and environmental conditions. Even after all of this testing, we still place product samples in the field with landscape professionals to ensure the equipment performs as intended.

PARTS & SERVICE



GENUINE TORO® PARTS

To best protect your investment and maintain optimal performance of your turf equipment, count on Toro genuine parts. When it comes to reliability, Toro delivers replacement parts designed to the exact specifications of our equipment. For peace of mind, insist on Toro genuine parts.



E-Z VAC BAGGERS

Commercial-grade mesh bags with reinforced front and bottom; deck-mounted, spindle-driven fan.

TITAN® HD BAGGERS

| PART # | DESCRIPTION |
|----------|--|
| 126-9360 | CE Kit EZ VAC Bagger (74453TE) |
| 126-9361 | CE Kit EZ VAC Bagger (74454TE) |
| 78481 | E-Z VAC Bagger - Standard |
| 78483 | E-Z VAC Bagger - Standard Completion Kit (74453TE) |
| 78484 | E-Z VAC Bagger - Standard Completion Kit (74454TE) |
| 78431 | E-Z VAC Bagger - Heavy Duty |
| 78433 | E-Z VAC Bagger - Heavy Duty Completion Kit (74453TE) |
| 78434 | E-Z VAC Bagger - Heavy Duty Completion Kit (74454TE) |

6000 SERIES BAGGERS

| PART # | DESCRIPTION |
|----------|--|
| 127-0336 | CE Bagger Compliance Kit (74902TE) |
| 127-0337 | CE Bagger Compliance Kit (74919TE & 75969TE) |
| 127-0338 | CE Bagger Compliance Kit (74925TE) |
| 78544 | E-Z Vac Dump From Seat (DFS) Collection System |
| 78551 | Blower and Drive Kit (74902TE) |
| 78552 | Blower and Drive Kit (74919TE & 75969TE) |
| 78553 | Blower and Drive Kit (74925TE) |
| 78562 | 122 cm and 132 cm E-Z Vac Twin Bagging System (74902TE, 74919TE & 75969TE) |
| 78563 | 152 cm E-Z Vac Triple Bagging System (74925TE) |
| 78566 | 122 cm and 132 cm E-Z Vac DFS Collection System (74902TE, 74919TE & 75969TE) |
| 78567 | 152 cm E-Z Vac DFS Collection System (74925TE) |

GRANDSTAND BAGGERS

| PART # | DESCRIPTION |
|----------|--|
| 30104 | 106 Litre Soft Bagger |
| 121-7515 | Bagger Adaptor Kit (74534TE) |
| 110-2025 | Bagger Adaptor Kit (74536TE) |
| 108-4091 | Bagger Enhancement Kit (74504TE) |
| 78524 | E-Z VAC Twin Bagger (74504TE) |
| 78525 | E-Z VAC Blower and Drive Kit (74504TE) |

* Not for Rear Discharge Models



STRIPING KIT

Creates vivid stripes for a premium "ball park" after-cut appearance.

| PART # | DESCRIPTION |
|----------|---|
| 107-1630 | Striping Kit - Z5000 and 7000 Series TURBO FORCE® Decks - Rubber |
| 108-2162 | Striping Kit - 7000 Series TURBO FORCE Decks - Roller |
| 115-7470 | Striping Kit - 48" (121.9 cm)-60" (152.4 cm) G3, 3000/5000/6000 Series |
| 117-8560 | Striping Kit - 36" (91.4 cm) and 40" (101.6 cm) GrandStand® |
| 133-1436 | Striping Kit - 48" (121.9 cm), 52" (132.1 cm) & 60" (152.4 cm) GrandStand (2016 models) |
| 126-7882 | Striping Kit - TITAN® HD |



LIGHT KIT

Lights easily mount to the mower frame, and wiring quickly connects to the existing accessory circuit.

| PART # | DESCRIPTION |
|----------|--|
| 107-9880 | Light Kit - 7000 Series and Z100-Z500 |
| 116-1154 | Light Kit - 6000 Series |
| 126-5382 | LED Light Kit - TITAN HD |
| 130-8469 | Light Kit - 8000 Series Direct Collect Z |
| 114-3505 | Light Kit - 91 cm and 102 cm Grandstands |
| 133-1437 | Light Kit - 122 cm Grandstands (2016 and newer) |
| 133-1495 | Strobe Kit - 122 cm Grandstands (2016 and newer) |



FLAT-FREE TIRES

Semi-pneumatic "flat-free" caster tires help avoid the huge drain on productivity that results from flat tires. Engineered to deliver the durability of solid tires with the soft, cushioned ride of air-filled tires. Flat-free tires come standard on most commercial equipment.

| PART # | DESCRIPTION |
|----------|---|
| 109-9126 | 6000 Series (2012-15) |
| 109-9127 | 6000 Series (2012-15) 7000 Series (2012-15) |
| 127-9531 | 6000 Series (2014-16) |
| 127-9528 | 6000 Series (2014-16) |
| 126-9368 | TITAN HD 1500 Series |



SUN SHADE

Optional fabric shade for 2-post ROPS shields the operator from the elements.

| PART # | DESCRIPTION |
|----------|------------------------------------|
| 115-4510 | SUNSHADE - All Z-Masters with ROPs |
| 126-8077 | SUNSHADE - TITAN HD |



DELUXE RIDER COVER

Heavy-duty waterproof cover is abrasion- and tear-resistant. Vented design helps reduce heat and moisture buildup.

| PART # | DESCRIPTION |
|----------|--|
| 490-7319 | Deluxe Rider Cover - All Z-Masters and Titan® HD |

HD WALK POWER MOWERS

| MODEL | PART # | DESCRIPTION |
|--------------|----------|--------------------|
| 22291 | 125-8840 | Cup-Anti Scalp |
| | 130-9700 | Engine Guard |
| | 130-9374 | Rear-Discharge Kit |
| | 130-9701 | Side Guards |
| 22280 | 130-9374 | Rear-Discharge Kit |

PROSTRIPE® 560 AND HD PROLINE WBM

| MODEL | PART # | DESCRIPTION |
|-------------------------|----------|--------------------|
| 22280/ 22291 | 130-9734 | Rear Discharge Kit |
| 02657 | 134-3722 | Groomer Brush Kit |

MIDSIZE

| MODEL | PART # | DESCRIPTION |
|-------------------------|-------------|--|
| 30070/ 30071 | 110-2026 | Bagger Enhancement Kit |
| | 110-2080 | Recycler Kit (36") |
| | 108-1118 | Blade - Atomic (6-pack) |
| | 105-7796-03 | Blade - Atomic |
| | 108-1117 | Blade - High Flow (6-pack) |
| | 110-0406 | Blade - Low Flow (6-pack) |
| | 105-7795-03 | Blade - Low Flow |
| | 110-0409 | Blade - Med Flow (6-pack) |
| | 105-7794-03 | Blade - Med Flow |
| | 110-0408 | Blade - Recycler (6-pack) |
| | 105-7779-03 | Blade - Recycler |
| | 115-4190 | Operator-Controlled Discharge Chute Kit (30070 only) |
| | 30104 | Soft Bag |
| | 30110 | Tru Trak Sully |
| | 112-7059-01 | Weight - Cast |
| 31914 | 02710 | Mid-Size Rear-Discharge Deck (81cm) |
| | 02711 | Mid-Size Rear-Discharge Deck (91 cm) |
| | 02712 | Mid-Size Rear-Discharge Deck (122 cm) |
| | 02720 | Mid-Size Flail Attachment |
| | 02929 | Turf Tyre Kit |
| | 02930 | Cleated Tire Kit |
| | 02931 | Dual Wheel Kit |
| | 02932 | Narrow Wheel Kit |
| | 30109 | Tru Track Sully |
| | 110-2085 | Weight Kit |

GRANDSTAND

| MODEL | PART # | DESCRIPTION |
|--|----------|--|
| 74534TE/ 74536TE/ 74540TE | 121-7515 | Bagger Adapter Kit, except 74540TE |
| | 121-7530 | Trash Bag Kit |
| | 114-3505 | Light Kit |
| | 133-1495 | Strobe Light Kit |
| | 98-9099 | Spark Arrestor |
| | 110-2070 | Recycler Kit, 74534TE, 74536TE |
| | 117-3620 | Weight Kit |
| | 117-8560 | Striping Kit |
| | 117-8565 | Operator-Controlled Discharge Chute Kit with Bag, except 74540TE |
| | 134-3217 | Recycler Kit for 74540TE |
| 74504TE/ 74542TE | 121-7515 | Bagger Adapter Kit, except 74542TE |
| | 133-1435 | Trash Bag Kit |
| | 133-1437 | Light Kit |
| | 98-9099 | Spark Arrestor |
| | 115-7466 | Recycler Kit. 74504TE |
| | 134-3529 | Recycler Kit. 74542TE |
| | 113-1428 | Weight Kit |
| | 133-1436 | Striping Kit |
| | 133-1434 | Operator-Controlled Discharge Chute Kit with Bag, except 74504TE |
| | 133-1438 | Electric Accessory Port |
| | 133-1440 | Anti-Scalp Kit |
| | 133-1441 | Trimmer Rack |
| | 139-1507 | Bucket Mount Kit |

TITAN® HD WITH MyRIDE®

| MODEL | PART # | DESCRIPTION |
|-----------------------------|----------|--|
| 74453TE/ 74454TE | 136-1665 | Triple Threat Kit (includes bucket holder, universal mount, and trimmer mount) |
| | 136-1664 | Universal mount Kit |
| | 136-1654 | Bucket holder & trash picker mount Kit |
| | 136-1682 | Trimmer mount Kit |
| | 136-7860 | HD Air Cleaner |
| | 136-1683 | ROPS Pin Kit |
| | 117-0097 | Seat Cover with Arm Rest |
| | 126-8379 | Trash Container Kit |
| | 126-8639 | Caster Weight Kit |
| | 126-8701 | Recycler Kit (74453TE) |
| | 126-8702 | Recycler Kit (74454TE) |
| | 127-9303 | High Altitude Kit |
| | 127-6666 | Jack Kit |
| | 127-6795 | MVP Belt & Blade Kit, 122 cm |
| | 127-6794 | MVP Belt & Blade Kit, 132 cm |

Z-MASTER 6000 SERIES

| MODEL | PART # | DESCRIPTION |
|---|----------|---|
| 74902TE/ 74919TE/ 74925TE/ 74969TE | 109-9487 | Hitch Kit |
| | 116-1154 | Light Kit |
| | 117-3600 | Operator-Controlled Discharge Chute Kit |
| | 115-7466 | Recycler Mulch Kit (122 cm) |
| | 115-7467 | Recycler Mulch Kit (132 cm) |
| | 115-7468 | Recycler Mulch Kit (152 cm) |
| | 115-7470 | Striping Kit |
| | 121-4811 | Z Stand Kit |
| | | |
| 74942TE | 116-9730 | Bumper Kit |
| | 109-9487 | Hitch Kit |
| | 116-1154 | Light Kit |
| | 125-9305 | Recycler Kit (122 cm) |
| | 121-4811 | Z Stand Kit |

Z-MASTER 7000 SERIES

| MODEL | PART # | DESCRIPTION |
|-----------------------------|----------|---|
| 74264TE/ 74265TE | 107-1634 | Front Skirt Kit |
| | 99-8925 | Hitch Kit |
| | 107-9880 | Light Kit |
| | 99-4664 | Filter Minder Gauge |
| | 78521 | Operator-Controlled Discharge Chute Kit |
| | 107-1610 | Recycler Kit (132 cm) |
| | 107-1611 | Recycler Kit (122 cm) |
| | 108-2162 | Roller Striping Kit |
| | 107-1630 | Rubber Striping Kit |
| 74279TE | 99-8925 | Hitch Kit |
| | 107-9880 | Light Kit |
| | 99-4664 | Filter Minder Gauge |

Z-MASTER 8000 SERIES

| MODEL | PART # | DESCRIPTION |
|----------------|----------|---|
| 74311TE | 130-8459 | ROPs Kit |
| | 126-1339 | ROPs Pin Kit |
| | 130-8488 | Hopper Latch Kit |
| | 130-8463 | Recycler Kit |
| | 130-8469 | Light Kit |
| | 130-8464 | Blade - Recycling Left, 63.5 cm (25in) |
| | 130-8465 | Blade - Recycling Right, 63.5 cm (25in) |
| | 130-8468 | MVP Kit |
| | | |

Toro Has What I Need

FROM
START
■ TO ■
FINISH

Worldwide Headquarters
The Toro Company
8111 Lyndale Ave. So.
Bloomington, MN 55420 U.S.A.
Phone: 0800 616 298
(UK Freephone Number)
www.toro.com

©2019 The Toro Company.
All Rights Reserved.

134-4924

TORO

Count on it.



facebook.com/ToroCompany
twitter.com/TheToroCompany
youtube.com/ToroCompanyEurope

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your dealer for details on all our warranties.