



PROFESSIONAL EQUIPMENT



FROM START TO FINISH.

From hardscape to landscape to mowing, our portfolio has you covered with a full range of solutions for the jobs you need to do. No matter what the Toro product, our entire line is designed with input from grounds professionals — and our work is never finished. Our agronomists and engineers continually work on new solutions to increase productivity, conserve water, reduce fuel consumption and improve growing conditions.

The result is a line of products that offers ease of use for operators at every skill level, durability to handle tough conditions, and reliability to minimise downtime and keep your operators productive. Plus, it's all backed by service and support from local Toro distributors who are dedicated to helping customers succeed.

Explore the full line of Toro products for grounds professionals at toro.com and contact your local Toro distributor to learn more.

100+ YEARS

Focused on Grounds Care

Heritage

For more than 100 years, The Toro Company has focused on making equipment to maintain grounds and landscapes. From operator productivity to promoting healthy grass to conserving precious resources, our roots are in caring for the land.



400+ Patents

Around the World on Toro Innovations



Listening to the Industry

Groups of grounds professionals come to Toro's U.S. headquarters to discuss their needs and experiences with Toro engineers and staff. We take that feedback and use it to develop new features and make our products better. Continuous improvement always drives us forward.

Fit for All Types of Environments

Toro equipment is used on some of the world's finest golf courses and sports fields, but it's also used in all kinds of tough applications — from parks and roadside maintenance to landscape projects and university campuses.



125+



Certified Training to Support Contractors

We offer certified training for your maintenance technicians so they can get the most from their Toro equipment. We stand behind our products with service and support at local distributors. And we support many associations that help advance the industry.

Toro Products

Sold In 125+ Countries Worldwide



5000+ Dealers

Worldwide to Serve You



Your True Partner

Our goal is to be more than a supplier. We want to be the partner you go to for solutions your business needs. From day one, Toro has been a company built on treating customers with fairness and respect. Simply put, relationships matter to us.



Investing In Research

Toro is committed to investing in product development. Through our Center for Advanced Turf Technology, leading agronomists and engineers continually work on new solutions to increase productivity, conserve water, reduce fuel consumption and improve growing conditions.



TABLE OF CONTENTS

SMALL AREA MOWERS	4
SMALL-MEDIUM AREA MOWERS	12
LARGE AREA MOWERS	30

TURF EQUIPMENT	44
SITWORKS & UTILITY VEHICLES	54
TORO EQUIPMENT COMPARISON	74

SMALL AREA MOWERS

WHAT'S NEW?

MOWING

Toro® HD Proline mowers are designed to withstand the demands of professional gardeners and landscapers. We redesigned the handle on our 53cm ProLine WPM petrol mowers with improved ergonomics for operators.

The 60V Lithium Battery HD Proline Walk Behind Mower combines power and durability with an easy to start battery system and easy to use features. We redesigned the cutting blade to improve battery life.

The Toro® Company's proprietary Recycler® cutting system mulches grass clippings into fine particles to return vital nutrients and misture back to the soil. This process reduces garden waste and helps optimize and reduce fertilizer usage.

Coming Soon
Updated Ergonomic Handle

The handle used on our 53cm ProLine WPM petrol mowers has been updated to improve ergonomics for operators and align with our battery powered and ProStripe® units. (Available on new models 22283 and 22285)

DESIGNED FOR COMMERCIAL USE

The 6mm thick die-cast aluminium deck is designed to withstand the demands of commercial mowing, whilst minimalising overall weight. The low hand arm vibration allows extended daily use.

Improved Performance Blade

The blade on the 22275 and 22275T mowers has been redesigned to improve battery life while maintaining the high quality of cut.

Recycler® Technology

The front throw chamber and blade are designed to help lift, suspend and re-cut clippings into a fine mulch, promoting healthy, lush turf.

TABLE OF CONTENTS


HD PROLINE 53 CM MOWERS	6	PROSTRIPE®	9
TURFMASTER™ HDX	8	HOVERPRO®	10



Now available with lithium-ion technology!

TOUGH MACHINES FOR TOUGH JOBS

HD PROLINE 53CM HEAVY DUTY MOWER



2.0kW 60V Brushless Motor Powered with Lithium-ion Technology!

HD PROLINE FEATURES

With commercial grade engines and up to 6mm thick cast aluminium decks, Toro® Proline mowers are designed to withstand the demands of professional gardeners and landscapers.



ERGONOMIC HANDLE
Updated handle on 53cm ProLine WPM petrol mowers with improved ergonomics for operators.
(Coming soon on new models 22283 and 22285)



RECYCLER® TECHNOLOGY

The front throw chamber and blade are designed to help lift, suspend and re-cut clippings into a fine mulch, promoting healthy, lush turf.



QUALITY & FLEXIBILITY

Deck design reduces chance of plugging and more efficiently collects grass. Excellent recycling performance too, all in one model.

HD PROLINE ADDITIONAL FEATURES



DESIGNED FOR COMMERCIAL USE

The 6mm thick die-cast aluminium deck is designed to withstand the extremes of commercial mowing, whilst minimising overall weight. The low hand arm vibration allows extended daily use.



ANTI-SCALP CUP

Protects the turf from scalping when mowing uneven surfaces. It also provides additional protection to blade bolts.



LONG RANGE FUEL TANK

Saves time on re-fuelling with a 3.8 L fuel tank. (22280 only)



POWERFUL COMMERCIAL ENGINES

Perform reliably in demanding conditions. With a replaceable spin-on oil filter for easy maintenance (22280 only)

HEAVY DUTY 60V POWER
Best for Large Lawns
Up to
1000
Meters²

ACCESSORIES

REPLACEMENT BAG

125-1030

ANTI-SCALP CUP

125-8440

STEEL DECK GUARD

130-9701

REAR DISCHARGE KIT (22283 & 22285)

130-9734

MULCHING BLADE

144-3178

WALK POWER MOWER COVER

490-7462

	BATTERY	WATT HOURS/CHARGE
FLEX-FORCE POWER SYSTEM™ BATTERIES	81860 (6.0 Ah)	324
	81875 (7.5 Ah)	405
MODEL	DESCRIPTION	
FLEX-FORCE POWER SYSTEM™ CHARGER	81805	60V 5.5 A Rapid Charger

Available with lithium-ion technology!



IMPROVED PERFORMANCE BLADE
Redesigned blade improves battery life while maintaining high quality of cut.
(22275 and 22275T)



HD PROLINE SPECIFICATIONS

MODEL	22275 / T 60V HD PROLINE	22291 / 22283 HD PROLINE	22280 / 22285 HD PROLINE
CUTTING WIDTH	53 cm (21")	53 cm (21")	53 cm (21")
ENGINE/MOTOR	2.0kW 60V Brushless	Kawasaki® FJ180V KAI, 4-cycle, 179 cc	Kawasaki FJ180V KAI, 4-cycle, 179 cc
BATTERY	Two 7.5Ah Lithium Ion batteries and 5.5A Rapid charger included (22275)	N/A	N/A
STARTER	Push Button	Recoil, Zone Start	Recoil, Zone Start ▶ Blade Brake Clutch
DRIVE SYSTEM	Fixed speed, Rear Wheel Drive	Fixed speed, Rear Wheel Drive	▶ 3-speed, Rear Wheel Drive
DECK TYPE	Recycler/Rear Bag, Aluminum	Recycler/Rear Bag, Aluminum	Recycler/Rear Bag, Aluminum
HEIGHT OF CUT	25 mm – 114 mm (1" – 4.5"), 4 point	25 mm – 114 mm (1" – 4.5"), 4 point	25 mm – 114 mm (1" – 4.5"), 4 point
SPEED	0-6.0 km/h (0-3.7 mph) forward	0-6.0 km/h (0-3.7 mph) forward	0-6.0 km/h (0-3.7 mph) forward
FUEL TANK CAPACITY	N/A	Petrol / 1.9 L (0.5 gal)	▶ Petrol / 3.8 L (1 gal)
WEIGHT*	46 kg (101 lbs) With battery 43 kg (95 lbs). Without battery	50 kg (110 lbs)	56 kg (124 lbs)
HAND ARM VIBRATION	1,0 m/s ²	2,7 m/s ²	2,7 m/s ²
WARRANTY	2-Year Full Warranty for Residential ¹ ; 1-Year Limited Warranty Commercial	2-Year Full Warranty for Residential ¹ ; 2-Year Warranty for Engine ²	1-Year Limited Warranty Commercial; 2-Year Warranty Commercial

* Net Weight – machine without fuel
¹ Residential use means use of the product on the same lot as your home. Use at more than one location is considered commercial use and the commercial warranty would apply.
² Some products used on Toro LCE Products are warranted by the engine manufacturer.

▶ Step-up Feature

PROFESSIONAL QUALITY OF CUT. EASY TO HANDLE.

TURFMASTER™ HDX WALK BEHIND MOWER

TURFMASTER HDX FEATURES

The Toro® 76cm TurfMaster HDX is in a class of its own. It covers more ground in less time than smaller models, yet is easy to handle. And every component from top to bottom is built for heavy use in rough conditions, from kerbs to trailers to multiple operators. It's professional-grade toughness with a professional-quality of cut.

- **FINISH THE JOB FASTER** with the highly productive 76 cm deck.
- **SIMPLIFY OPERATION** with a conventional walk-behind design that's easier to use and control compared to other mower styles.
- **GET COMMERCIAL-GRADE POWER** for heavy use with the Kawasaki® engine with spin-on oil filter and dual element air filter.
- **EXTEND MOWING TIME** between refueling with the large 3,8 L (1 gal) gas tank.
- **GAIN EXCELLENT CONTROL** with the easy-to-operate, dual-action, single-bail control system.
- **DISENGAGE BLADES** without shutting down the engine, thanks to the Blade Brake Clutch system.

TURFMASTER HDX ADDITIONAL FEATURES



BLADE BRAKE CLUTCH
Stops the blade but enables the engine to continue running while emptying the grass bag or travelling over non-grassed areas.



TWIN BLADE CUTTING SYSTEM
The Turfmaster HDX increases contractor productivity. The 76cm wide deck and unique twin blade system offer savings of up to 40% on mowing time**.



HEAVY-DUTY COMPONENTS
Deck skid side skirts, steel bull-nose front bumper, tough sealed transmission and a strong one-piece handle are all designed for the demands of commercial mowing.



LONG RANGE FUEL TANK
Saves time on re-fueling with a 3,8 L fuel tank.

**Time Savings via wider cutting path and enhanced speed of Turfmaster vs. 53cm Toro mower, and will vary due to mowing conditions.

POWERFUL COMMERCIAL ENGINE
Reliable and durable Kawasaki® commercial engine with a 3.8 L long range fuel tank which saves time on re-fuelling.

TURFMASTER HDX ACCESSORIES



76 CM (30") WALK
POWER MOWER COVER
490-7461



TURFMASTER HDX SPECIFICATIONS

MODEL	22207 TURFMASTER HDX
CUTTING WIDTH	76 cm (30")
ENGINE	Kawasaki® FJ180V Commercial, 4 cycle, 179 cc
STARTER	Recoil, Blade Brake Clutch
DRIVE SYSTEM	Heavy Duty Variable Speed Rear Wheel Drive
DECK TYPE	Steel & Aluminium - Recycler/Rear Bag/Side Discharge
BLADE BRAKE CLUTCH	Standard
HEIGHT OF CUT	38 mm - 127 mm (1.5" - 5") in 6 mm (0.24") increments
SPEED	Variable up to 6.4 km/h (3.98 mph)
FUEL TANK CAPACITY	Petrol / 3,8 L (1 gal)
WEIGHT*	85 kg (187 lbs)
HAND ARM VIBRATION	6,2 m/s ²
WARRANTY	2-Year Full Warranty for Residential ¹ ; 1-Year Limited Warranty Commercial; 2-Year Warranty for Engine ²

* Net Weight – machine without fuel
¹ Residential use means use of the product on the same lot as your home. Use at more than one location is considered commercial use and the commercial warranty would apply.
² Some products used on Toro LCE Products are warranted by the engine manufacturer.

PICK THE RIGHT PLAYER

PROSTRIPE® STRIPING MOWER

PROSTRIPE FEATURES

Designed to provide a precise cut and clean striped finish, the Toro ProStripe® 560 leaves your turf looking at its best. This lightweight and manoeuvrable mower features a two-piece ribbed roller design to leave a crisp stripe, and MatchCut™ technology when height of cut setting is crucial.



TWO-PIECE ROLLER

Two-piece roller significantly improves manoeuvrability and minimises turf marking when compared to single-piece roller designs whilst the ribbed tread provides superior traction.



MATCHCUT™

Fine tune the cutting height with MatchCut™. Providing half-increment (3.25mm) settings, MatchCut proves ideal for use on fine turf applications or when using multiple machines on a large area when accurate height setting is crucial.



GROOMER BRUSH KIT

Promote healthier turf and a finer cut by reducing lateral blade growth and removing surface debris. Adjustable for rake and height to allow precision setting. (134-3722)



PROSTRIPE SPECIFICATIONS

MODEL	02657 PROSTRIPE 560
CUTTING WIDTH	56 cm (22")
ENGINE	Kawasaki® FJ180V KAI OHV 4-cycle, 179 cc
STARTER	Recoil, Blade Brake Clutch
DRIVE SYSTEM	3-Speed Self Propelled
DECK TYPE	Aluminum, Rear Discharge/Rear Bag
HEIGHT OF CUT	13-position, 13-60 mm (0.5" - 2.36"), 3.25 mm (0.13") increments
SPEED	3.0; 4.0; 5.2 km/h (1.9; 2.5; 3.2 mph)
FUEL TANK CAPACITY	Petrol / 1.5 L (0.45 gal)
WEIGHT*	66 kg (146 lbs)
WARRANTY	2-Year Limited Warranty

* Net Weight - machine without fuel

MOW UNEVEN TERRAIN

HOVERPRO® HOVER MOWER

HOVERPRO FEATURES


The HoverPro® range offers the ideal mowing solution. Though suitable for all terrains, HoverPros™ excel in mowing tough, undulating ground and steep slopes, allowing these areas to be maintained safely and effectively, even on slopes up to 45 degrees (except 02615 = 25°).

With no wheels and excellent hovering, there is minimal risk of the mower dropping off the grass edge, making these

mowers an ideal choice for maintaining areas around flower beds or golf course bunkers.



HOVERPRO® 450 / 550

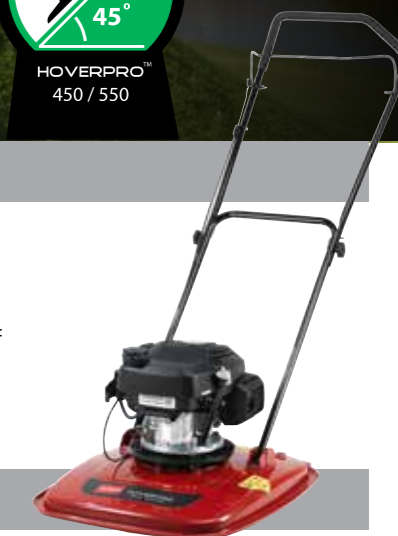

HOVERPRO ACCESSORIES




HI-RISE KIT

02619/02620
Simply bolt to existing deck to increase height of cut by 35mm. (02615 / 02616 only)



TRANSPORT WHEELS

02622
Detachable wheels for easy site-to-site transport. (Not available for 02615)



EXTENSION HANDLES

02628
Makes working on slopes or hard to reach areas even easier. (Not available for 02615)

HOVERPRO SPECIFICATIONS

MODEL	02615 HOVERPRO® 400	02616 HOVERPRO® 450 NEW	02617 HOVERPRO® 550 NEW
CUTTING WIDTH	40 cm (16")	46 cm (18")	53 cm (21")
ENGINE	Honda GXV57	Honda GCVx170	Honda GCVx170
STARTER	Recoil Start	Recoil Start	Recoil Start
DRIVE SYSTEM	Push	Push	Push
DECK TYPE	Polymer	Polymer	Polymer
CUTTER SYSTEM	Nylon Line	Nylon Line	Steel Cutting Blade
HEIGHT OF CUT/ADJUSTMENT	18 - 30 mm (0.7" - 1.18")	18 - 30 mm (0.7" - 1.18")	16 - 34 mm (0.63" x 1.34")
FUEL TANK CAPACITY	0.27 L (0.1 gal)	0.99 L (0.24 gal)	0.99 L (0.24 gal)
WEIGHT*	12.5 kg (28 lbs)	18.5 kg (40.8 lbs)	19.3 kg (42.5 lbs)
SLOPE ANGLE	25°	45°	45°
WARRANTY	2-Year Limited Warranty		

* Net Weight - machine without fuel

SMALL-MEDIUM AREA MOWERS

WHAT'S NEW?

TOP GRADE MATERIALS AND ENGINEERING

For a demanding job, it's good to know there are some things you can count on. Like the way the new Toro® electric GrandStand® Revolution™ powered with Hypercell™ technology stands up to punishing use, season after season.

Optimize machine feel and response, including speed control, with patent-pending software controls.

COMING SOON
REVOLUTION™
GRANDSTAND

POWER UP TO
18,4 kW
(24.7 HP)

Powered by **Toro HyperCell Battery System**

With all day runtimes, Toro's Hypercell Battery is designed to operate with the machinery and meet landscaper needs.

Focus on **Toro Turbo Force® Decks**

Have confidence in the proven precise cut from the TURBO FORCE® deck. Standard on all GrandStand models.

Focus on **Flex-Ride Operator Platform**

Self-compensates for operators of all sizes, resulting in less fatigue and more productivity all day.



TABLE OF CONTENTS

MID-SIZE WALK BEHIND MOWERS
GRANDSTAND® STAND-ON MOWERS

14 Z MASTER® 2000
16 Z MASTER® 4000

18 Z MASTER® 6000
20 Z MASTER® 7000

22 Z MASTER® 7500
24 Z MASTER® 8000

26
28

BUILT FOR POWER, BUILT TO LAST

MID-SIZE WALK BEHIND HYDRO POWER MOWERS

MID-SIZE HYDRO FEATURES


For a demanding job. It's good to know there are some things you can count on. Like the way your Toro® mid-size mower stands up to punishing use, season after season. And the TURBO FORCE® cutting system that evenly disperses fine clippings for a flawless cut every time. With comfortable controls and a choice of decks, you're well on your way to getting more done in a day.

- **FLEXIBLE** power units with a choice of 3 decks and a flail to suit different job conditions.
- **PREVENT IMPACT DAMAGE** with the TURBO FORCE® 7 gauge steel deck and welded bull-nose bumper.
- **ENHANCED DURABILITY** with robust cast iron spindle housings with maintenance-free sealed bearings.
- **REDUCE FATIGUE** with the industry-standard pistol grip controls.
- **FINE-TUNE THE CUT** for different conditions or seasons with the patented adjustable baffle.
- **MAXIMIZE PERFORMANCE** with commercially proven heavy-duty drive system.

MID-SIZE HYDRO 31914 ACCESSORIES



**ROBUST FLAIL
CONSTRUCTION**
02720



**DUAL WHEEL
KIT**
02931

ADDITIONAL WHEEL OPTIONS

- TURF TYRE KIT 02929
- CLEATED TYRE KIT 02930
- NARROW WHEEL KIT* 02932

* Recommended when specifying 82 cm deck with 31914.



MID-SIZE HYDRO ADDITIONAL FEATURES



CHOICE OF REAR DISCHARGE DECKS

Each offering unsurpassed strength with 7 gauge aluminium, a superior cut and increased productivity in extreme mowing conditions (31914 only).



LONG RANGE FUEL TANK

Provides excellent operational range and offers high productivity through reduced downtime for refueling.



EASY HEIGHT OF CUT ADJUSTMENT

Provides cutting heights ranging from 25 to 108mm in 6mm increments with easy to change vertical pin height of cut system (31914 only).



TWO-WHEEL SULKY

The fold-away 2-wheel sulky (sold separately) makes operator on-and-off easy, reducing fatigue.



44410TE

MID-SIZE HYDRO SPECIFICATIONS

MID-SIZE	31914 HYDRO POWER UNIT	44410TE	44424TE
ENGINE	Kawasaki® FS541V, 4-cycle, 603 cc, OHV V-Twin, 11,2 kW (15 hp)	Kawasaki FS481V, 4-cycle, 603 cc, Air-cooled 10,8 kW (14.5 hp)	Kawasaki FS541V, 4-cycle, 603 cc, OHV V-Twin, 11,2 kW (15 hp)
STARTER	Electric	Electric	Electric
DRIVE SYSTEM	Twin Hydro-gear® pumps with Parker® wheel motors	Twin Hydro-gear pumps	Twin Hydro-gear pumps
DECK TYPE	TURBO FORCE® Rear Discharge or Flail	TURBO FORCE® Side Discharge, Recycler (optional)	TURBO FORCE Side Discharge, Recycler (optional)
HEIGHT OF CUT	Rear Discharge: 25 - 108 mm (1" - 4.25") Flail: 12 - 140 mm (0.5" - 5.5")	38 - 114 mm (1.5" - 4.5")	38 - 114 mm (1.5" - 4.5")
SPEED	Forward: 0 - 9,6 km/h; (0 to 6 mph) Reverse: 0 - 3,2 km/h (0 to 2 mph)	Forward: 0 to 11 km/h (0 to 7 mph); Reverse: 0 to 4,8 km/h (0 to 3 mph)	Forward: 0 to 11 km/h (0 to 7 mph); Reverse: 0 to 4,8 km/h (0 to 3 mph)
FUEL/CAPACITY	Petrol / 19 L (5 gal)	Petrol / 19 L (5 gal)	Petrol / 19 L (5 gal)
WEIGHT*	129 kg (284 lbs)	272 kg (600 lbs)	301 kg (664 lbs)
WARRANTY	2-Year Limited Warranty Commercial. 2-Year Limited Warranty for Engine ¹		

REAR DISCHARGE DECKS	02710	02711	02712
WIDTH OF CUT	81 cm (32")	91 cm (36")	122 cm (48")
HEIGHT OF CUT	25 - 108 mm (1" - 4.25") in 6 mm (0.24") increments		
HAND ARM VIBRATION (HAV)	2,0 m/s ²	1,8 m/s ²	3,1 m/s ²
WHEEL OPTIONS	Narrow Wheel Kit (02932)	Dual Wheel Hub Kit (02931) Cleated Tyre Kit (02930) Turf Tyre Kit (02929)	
OPTIONAL ACCESSORIES	Tru Trak Sulky (30109)		
NET WEIGHT* W/ TRACTION UNIT	261 kg (575 lbs)	263 kg (580 lbs)	279 kg (615 lbs)

FLAIL ATTACHMENT	02720
WIDTH OF CUT	91 cm (36")
HEIGHT OF CUT	Infinitely variable between 12 mm - 140 mm (0.5" - 5.5")
HAND ARM VIBRATION (HAV)	3,3 m/s ²
WHEEL OPTIONS	Dual Wheel Hub Kit (02931) Cleated Tyre Kit (02930) Turf Tyre Kit (02929)
OPTIONAL ACCESSORIES	Tru Trak Sulky (30109)
NET WEIGHT* W/ TRACTION UNIT	305 kg (672 lbs)

* Net Weight - machine without fuel
¹ Some products used on Toro LCE Products are warranted by the engine manufacturer.

GET DONE & ON TO THE NEXT JOB FASTER.

GRANDSTAND® STAND ON MOWERS

GRANDSTAND FEATURES

Rough bumps and challenging terrain are all in a day's work. Feeling them shouldn't have to be. The Toro® GrandStand® combines the speed and comfort of a zero-turn rider with the on-and-off ease of a wide area walk-behind — creating a fast, manoeuvrable and more productive alternative. Cushioned suspension keeps operators comfortable while working. Get more done in less time.

- **IMPROVE PRODUCTIVITY** through easy access on and off the machine.
- **SAVE TRAILER SPACE** and enhance versatility with compact size.
- **REDUCE OPERATOR FATIGUE** with platform suspension and twin-lever steering controls.
- **INCREASE OPERATOR VISIBILITY** which leads to less damage and higher-quality work.
- **ADJUST HEIGHT-OF-CUT** from the operator platform.
- **REDUCE VIBRATIONS** and improve footing with the anti-fatigue rubber mat.

GRANDSTAND ACCESSORIES



RUBBISH BAG KIT
121-7530 (74534TE, 74536TE, 74540TE)
133-1435 (74504TE, 74542TE)



STRIPING KIT
117-8560
(74534TE, 74536TE, 74540TE)
131-1436
(72504TE, 74542TE)



RECYCLER KIT
110-2080 (74534TE)
134-3217* (74540TE)
139-6650* (72504TE)
134-3259* (72542TE)

* Blades not included.



LIGHT KIT
114-3505 (74534TE, 74536TE, 74540TE)
133-1437 (72504TE, 72542TE)



MICHELIN X TWEEL TURF TYRES
45,7 cm (18") TWEEL
139-7890
(72504TE and 72542TE)

STROBE KIT
133-1495 (72542TE, 72504TE)

GRANDSTAND ADDITIONAL FEATURES



2-IN-1 VERSATILITY
Toro's fold-up operator platform allows conversion of the GrandStand to a walk-behind. Just lower it back down to ride – no need to switch mowers.



ULTRA-COMPACT FOOTPRINT
Ideal for smaller residential properties or areas with gates and tight spaces, available in 91cm and 102cm models.



INNOVATIVE SPEED CONTROL
Changes drive tyre response without limiting the travel of the controls, or slowing down the engine or blades.



FLEX-RIDE OPERATOR PLATFORM
Self-compensates for operators of all sizes, resulting in less fatigue and more productivity all day.



TRACTION AND HANDLING
A wide stance and optimal balance enhance hillside control. Operators can shift weight as needed to further enhance performance.



COMING SOON
REVOLUTION™
GRANDSTAND

GRANDSTAND SPECIFICATIONS

MODEL	74534TE	74540TE	72504TE	72542TE	GRANDSTAND® REVOLUTION
CUTTING WIDTH	91 cm (36")	91 cm (36")	▶122 cm (48")	122 cm (48")	132 cm (52")
DEFLECTOR WIDTH	131 cm (52")	96 cm (38")	160 cm (63")	127 cm (50")	TBC
ENGINE/MOTOR	Kawasaki® FS541V, 603 cc	Kawasaki FS541V, 603 cc	Kawasaki FX691V, 726 cc	Kawasaki FX691V, 726 cc	Dana Mid-mount 120-60 Electric Transmission ¹
GROUND SPEED	0-8 km/h (0 - 5 mph)	0-8 km/h (0 - 5 mph)	▶0-12 km/h (0 - 7.5 mph)	0-12 km/h (0 - 7.5 mph)	0-12 km/h (0 - 7.5 mph)
DECK TYPE	TURBO FORCE® Side Discharge	TURBO FORCE Rear Discharge	TURBO FORCE Side Discharge	TURBO FORCE Rear Discharge	TURBO FORCE Side Discharge
DECK HEIGHT	127 mm (5")	127 mm (5")	140 mm (5.5")	140 mm (5.5")	140 mm (5.5")
HEIGHT OF CUT	25-127 mm (1" - 5")	25-127 mm (1" - 5")	38-127 mm (1.5" - 5")	38-127 mm (1.5" - 5")	38-127 mm (1.5" - 5")
SPINDLE BEARINGS	Maintenance Free	Maintenance Free	Maintenance Free	Maintenance Free	Maintenance Free
DRIVE TYRES	Turf Master® 46 x 22 - 20 (18" x 8.5" - 8")	Turf Master 46 x 24 - 20 (18" x 9.5" - 8")	▶Turf Master 51 x 25 - 20 (20" x 10 - 8")	Turf Master 51 x 25 - 20 (20" x 10 - 8")	51 x 27 - 30,5 (20" x 10.5" - 12")
CASTER TYRES	28 x 10 - 12,5 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 - 12,5 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 - 12,5 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 - 12,5 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 x 13 (11" x 4" - 5") Flat-free Semi-Pneumatic
FUEL/CAPACITY	Petrol, 29,5 L (8 gal)	Petrol, 29,5 L (8 gal)	▶Petrol, 38 L (10 gal)	Petrol, 38 L (10 gal)	HyperCell® Battery 18,4 kW 6 - 9+ hour run time
WEIGHT*	343 kg (756 lbs)	352 kg (776 lbs)	407 kg (897 lbs)	415 kg (915 lbs)	TBC
WARRANTY	5-Years or 1200 hours. ² 3-Year Limited Warranty for Engine. ¹				TBC

* Net Weight – machine without fuel
¹ Powered by HyperCell® battery technology, not swappable
² Some products used on Toro LCE Products are warranted by the engine manufacturer.
³ Whichever occurs first

A WORKHORSE WITH WORLD-CLASS COMFORT.

Z MASTER® 2000 SERIES PROFESSIONAL ZERO TURN MOWERS

19,500 - 21,500
(4.8 - 5.3)
Square Meters (Acres)/Hour
 Maximum meters² (acres) per hour based on 90% efficiency
 KMPH x width of cut (MPH x width of cut).
 Actual productivity dependent upon conditions.

Z MASTER® 2000 FEATURES

Heads will definitely turn when you're towing a Z Master 2000 Series around town. But it really shines once it's off the trailer, with commercial performance, reliability and efficiency at an unbeatable value.

- **FINISH MORE JOBS FASTER THAN EVER** with the powerful engines and upgraded hydros, and it's built to take on the toughest hits with a fully tubular frame, large 56 cm (22") rear tyres and 7/10-gauge steel deck with bullnose bumper.
- **WORLD-CLASS COMFORT**, built-in lights and your customers will love the beautiful cut of the TURBO FORCE® deck.
- **REST EASY** knowing that Toro stands behind its mowers with a 4-year, warranty.



Z MASTER® 2000 ACCESSORIES



TRIPLE THREAT KIT
145-3691



132 CM (52") MVP BELT AND BLADE KIT
135-2254



SUNSHADE KIT
126-8077
HARDTOP SUN CANOPY KIT (ARTICULATING)
140-4367; 144-3719

ROPS LIGHT KIT
144-1992

STRIPER KIT
126-7882

Z MASTER® 2000 ADDITIONAL FEATURES



NO MORE ROCKY RIDES
 You shouldn't feel like you've gone 12 rounds with your lawn after mowing it. Save your body from the toughest terrain and avoid slow mowing speeds with the MyRIDE suspension system. Select models.



MADE TO LAST
 Enjoy years of reliable performance with a fully tubular frame and 7/10-gauge steel deck.

Z MASTER® 2000 SPECIFICATIONS

MODEL	HDX - MyRIDE® 74456TE	HDX - MyRIDE® 77292TE
CUTTING WIDTH	122 cm (48")	132 cm (52")
DEFLECTOR WIDTH	N/A	170 cm (67")
ENGINE	Kawasaki® FX730V, 726 cc, 17.5 kW (23.5 HP)	Kawasaki FX730V, 726 cc, 17.5 kW (23.5 HP)
GROUND SPEED	13 km/h (8 mph)	11 km/h (7 mph)
DECK CONSTRUCTION	7/10-ga TURBO FORCE, Rear Discharge	7/10-ga TURBO FORCE, Side Discharge
DECK HEIGHT	12.7 cm (5")	12.7 cm (5")
HEIGHT OF CUT	3.8-12.7 cm (1.5-5"), 0.64 cm (0.25") increments	3.8-12.7 cm (1.5-5"), 0.64 cm (0.25") increments
DECK LIFT DESIGN	Mechanical. Foot Operated	Mechanical. Foot Operated
SPINDLES	20,3 cm (8") Diameter Cast Aluminum	20,3 cm (8") Diameter Cast Aluminum
DRIVE TYRES	Standard Tyres (Hoosier) 22" x 9.5"-12" (56 cm x 24 cm - 30,5 cm)	Standard Tyres (Hoosier) 22" x 9.5"-12" (56 cm x 24 cm - 30,5 cm)
CASTER TYRES	Black Pneumatic, 13" x 6.5" - 6" (33 cm x 16,5 cm - 15,2 cm)	Black Pneumatic, 13" x 6.5" - 6" (33 cm x 16,5 cm - 15,2 cm)
FUEL/CAPACITY	26,5 L (7 gal)	26,5 L (7 gal)
WEIGHT*	432 kg (953 lbs)	474 kg (1046 lbs)
WARRANTY	4-Years or 750 hours. ² 3-Year Limited Warranty for Engine. ¹	

* Net Weight - machine without fuel
¹ Some products used on Toro LCE Products are warranted by the engine manufacturer.
² Whichever occurs first

TAKE ON NATURE, WITH THIS POWERHOUSE.

Z MASTER® 4000 SERIES PROFESSIONAL ZERO TURN MOWERS

19,500 - 30,000
(4.8 - 7.3)

Square Meters (Acres)/Hour
Maximum meters² (acres) per hour based on 90% efficiency
KMPH x width of cut (MPH x width of cut).
Actual productivity dependent upon conditions.

Z MASTER 4000 FEATURES

The new Z MASTER® 4000 Series delivers durability, professional results and unmatched comfort. Constructed with military grade materials and equipped with the Turbo Force® cutting deck, heavy-duty front-end design, and pro-grade engines. Mow in comfort with standard electronic deck lift assist, front step-thru deck, USB ports and MyRIDE® suspension seat system.

- **ENHANCED COMFORT** The optional MyRIDE® suspended operator platform allows for 7.6 cm of travel, isolating bumps and vibrations from the operator.
- **TURBO FORCE® CUTTING DECKS** Landscape professionals worldwide rely on Toro's TURBO FORCE® decks for outstanding quality of cut and durability.
- **COMMERCIAL-GRADE DURABILITY** From the durable 7/10-gauge high strength steel TURBO FORCE cutting deck, to the rugged durable frame and commercial-grade engine, the Z MASTER® 4000 Series is built to last.

Z MASTER 4000 ADDITIONAL FEATURES



NO MORE ROCKY RIDES
You shouldn't feel like you've gone 12 rounds with your lawn after mowing it. Save your body from the toughest terrain and avoid slow mowing speeds with the MyRIDE suspension system.



LIGHT THE WAY
Built-in LED lights give you a superb panoramic view in dark conditions. Select models.



MADE TO LAST
Enjoy years of reliable performance with a fully tubular frame and 7/10-gauge steel deck.



EXTRA-WIDE REAR TYRES
Optional extra-wide rear tyres provide better traction and help prevent tearing the turf. Available in two diameters: 61 cm (24") or 66 cm (26")



Z MASTER 4000 ACCESSORIES

- | | | | | |
|--|--|--|--|---------------------------------|
| RECYCLER KITS*
122 cm (48") - 144-0386
132 cm (52") - 144-0387
152 cm (60") - 144-0388 | BAGGER COMPLETION KITS
22 cm (48") - 78464
132 cm (52") - 78465
152 cm (60") - 78466 | CE KIT FOR BAGGERS
145-1261 CE Kit - (74048TE)
145-1262 CE Kit - (74053TE)
145-1263 CE Kit - (74056TE) | JACK MOUNT KIT
144-2676
JACK KIT
127-6666 | STRIPING KIT
126-7882 |
|--|--|--|--|---------------------------------|

Z MASTER 4000 SPECIFICATIONS

MODEL	PRO BASE - MyRIDE® 74048TE	HDX - MyRIDE® 74053TE	HDX - MyRIDE® 74056TE
CUTTING WIDTH	122 cm (48")	132 cm (52")	152 cm (60")
DECK CONSTRUCTION	7-ga TURBO FORCE, Side Discharge	7-ga TURBO FORCE, Side Discharge	7-ga TURBO FORCE, Side Discharge
ENGINE	Kawasaki® FX691V, 726 cc, 16.4 kW (22 HP)	Kawasaki FX801V, 852 cc, 19 kW (25.5 HP)	Kawasaki FX801V, 852 cc, 19 kW (25.5 HP)
GROUND SPEED	14 km/h (9 mph)	14 km/h (9 mph)	14 km/h (9 mph)
DECK LIFT DESIGN	Electric	Electric	Electric
DECK DEPTH	14 cm (5.5")	14 cm (5.5")	14 cm (5.5")
HEIGHT OF CUT	38 -14 mm (1.5-5.5"), 6.4 mm (0.25") increments	38 -14 mm (1.5-5.5"), 6.4 mm (0.25") increments	38 -14 mm (1.5-5.5"), 6.4 mm (0.25") increments
SPINDLES	22.9 cm (9") Diameter Die-Cast Aluminum	22.9 cm (9") Diameter Die-Cast Aluminum	22.9 cm (9") Diameter Die-Cast Aluminum
DRIVE TYRES	Super Turf 24" x 9.5"-12" (61 cm x 24 cm - 30.5 cm)	Voodoo 26" x 10.5"-12" (66 cm x 26.7 cm - 30.5 cm)	Voodoo 26" x 12"-12" (66 cm x 30.5 cm - 30.5 cm)
CASTER TYRES	Black Pneumatic, 13" x 6.5" - 6" (33 cm x 16.5 cm - 15.2 cm)	Black Pneumatic, 15" x 6.5" - 6" (38 cm x 16.5 cm - 15.2 cm)	Black Pneumatic, 15" x 6.5" - 6" (38 cm x 16.5 cm - 15.2 cm)
FUEL/CAPACITY	37.8 L (10 gal)	37.8 L (10 gal)	37.8 L (10 gal)
WEIGHT*	517 kg (1140 lbs)	582 kg (1284 lbs)	543 kg (1197 lbs)
WARRANTY	5-Years or 1250 hours. ² 3-Year Limited Warranty for Engine. ¹		

* Net Weight - machine without fuel
¹ Some products used on Toro LCE Products are warranted by the engine manufacturer.
² Whichever occurs first

* Blades not included.

MASTER THE TOUGHEST JOB CONDITIONS

Z MASTER® 6000 SERIES PROFESSIONAL ZERO TURN MOWERS

Z MASTER 6000 FEATURES

The Z Master® 6000 Professional Series is one of our most advanced and most comfortable zero turn mowers. Experience industry leading performance features like TURBO FORCE® cutting technology, the toughest spindle assemblies, improved comfort, enhanced traction and control, plus additional professional features for improved handling and superior manoeuvrability.

- **HANDLE DEMANDING CONDITIONS** with a choice of powerful engines.
- **REDUCE OPERATOR FATIGUE** with a thick, cushioned, deluxe suspension seat and 3-D isolator mounts that absorb vibrations.
- **EASE OVER BUMPS** with the convenient foot-pedal deck lift.
- **OUTSTANDING STABILITY** with a low center of gravity enhances handling on hills.
- **SMOOTH AND POWERFUL RESPONSE** from unitised pump and wheel motors.
- **ABSORB IMPACT** eliminate deck sway and get a clean cut on hillsides with the robust deck hanging system.



Z MASTER 6000 ACCESSORIES



OPERATOR CONTROLLED DISCHARGE CHUTE
117-3600



HITCH KIT
109-9487



MICHELIN X TWEEL TURF TYRES
60,7 cm (24") TWEEL 139-7891



MyRIDE SUSPENSION SYSTEM

Long days will feel short with the amazingly comfortable MyRIDE® suspension system. The fully suspended, adjustable operator platform isolates bumps and vibrations so you don't feel the rough terrain. It's the Toro toughness you expect with a ride you won't believe. Model 74969TE only

RECYCLER KITS
122 cm (48") - 139-6650
132 cm (52") - 139-6653
152 cm (60") - 139-6655
152 cm (60"), RD - 144-0379

Z MASTER 6000 ADDITIONAL FEATURES



PRO RESULTS EVERY TIME

TURBO FORCE® 140 mm (5.5") deep cutting decks feature 5,6 km/min. (18,500+ ft./min.) blade tip speed and nearly 16 mm (0.25") thick heat-treated steel blades.



TOUGH SPINDLES

Cast aluminum greaseless spindles survive impacts that would destroy lesser spindles, thanks to a stout cast iron housing and massive base.



COMFORTABLE RIDE

The deluxe suspension seat features thick cushions, large bolsters and 3-D isolator mounts that absorb bumps and vibrations to reduce operator fatigue.



DECK LIFT ASSIST

Adjusts the deck height quickly and easily with the standard deck lift assist foot pedal.



PERSONALISED RIDE SETTINGS*

The redesigned MyRIDE® Suspension System Allows the operator to easily and quickly adjust their ride settings to account for their personal ride preferences, without tools.

Model 74969TE only

Z MASTER® 6000 PRODUCTIVITY

23.500 - 30.000

(5.8-7.3)

Square Meters (Acres)/Hour

Maximum Meters² (Acres) per hour based on 90% efficiency
KMPH x width of cut (MPH x width of cut).
Actual productivity dependent upon conditions.



Z MASTER 6000 SPECIFICATIONS

MODEL	72902TE	72969TE* - MyRIDE	72942TE
CUTTING WIDTH	122 cm (48")	132 cm (52")	152 cm (60")
DEFLECTOR WIDTH	160 cm (63")	172 cm (68")	192 cm (76")
ENGINE	Kawasaki® FX651V 726 cc @ 3100 rpm 16,4 kW (22 hp)	Kawasaki FX651V 726 cc @ 3100 rpm 16,4 kW (22 hp)	Kawasaki FX801V 852 cc @ 3400 rpm 19 kW (25.5 hp)
GROUND SPEED	0-16 km/h (0- 10mph)	0-16 km/h (0- 10mph)	0-18,5 km/h (0- 11,5mph)
DECK TYPE	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Rear Discharge
DECK HEIGHT	14 cm (5.5")	14 cm (5.5")	14 cm (5.5")
HEIGHT OF CUT	2,5-14 cm (1"-5.5")	2,5-14 cm (1"-5.5")	2,5-14 cm (1"-5.5")
SPINDLES	Cast Aluminum, Greaseless	Cast Aluminum, Greaseless	Cast Aluminum, Greaseless
DRIVE TYRES	Turf Master® 61 x 24 - 30.5 cm (24" x 9.5" -12")	Turf Master 61 x 24 - 30.5 cm (24" x 9.5" -12")	Turf Master 61 x 30.5 - 30.5 cm (24" x 12" -12")
CASTER TYRES	33 x 12.5 - 15 cm (13" x 5" - 6") Flat-free Semi-Pneumatic	33 x 16.5 - 15 cm (13" x 6.5" - 6") Flat-free Semi-Pneumatic	Multi Trac 33 x 16.5 - 15 cm (13" x 6.5" - 6") Flat-free Semi-Pneumatic
FUEL/CAPACITY	Petrol/ 45 L (12 gal)	Petrol/ 45,4 L (12 gal)	Petrol/ 45,4 L (12 gal)
WEIGHT*	501 kg (1105 lbs)	547 kg (1207 lbs)	582 kg (1282 lbs)
WARRANTY	5-Years or 1400 hours. ² 3-Year Limited Warranty for Engine. ¹		

* Net Weight - machine without fuel
¹ Some products used on Toro LCE Products are warranted by the engine manufacturer.
² Whichever occurs first

▶ = Enhanced or step-up feature

DOMINATE THE MOST DEMANDING JOBS

Z MASTER® 7000 SERIES PROFESSIONAL DIESEL ZERO TURN MOWERS

21.500 - 30.000
(5.3-7.3)
Square Meters (Acres)/Hour
 Maximum meters² (acres) per hour based on 90% efficiency
 KMPH x width of cut (MPH x width of cut).
 Actual productivity dependent upon conditions.

Z MASTER 7000 SERIES FEATURES

It's 7 a.m. The grass is long and wet. And you've got five more properties to mow after this one. At times like these, you don't want a struggle. You need power. Toro's Professional 7000 Series gives you the torque to take on extreme mowing conditions that would max out a conventional petrol-powered mower. Better yet, it runs on diesel, so you get more power with less fuel than a comparable petrol engine.

- **POWER THROUGH** the toughest conditions with the high-torque 3-cylinder diesel engine.
- **RESIST DAMAGE** from debris with the rugged deck made of 7 gauge, high-strength steel.
- **BIODIESEL COMPATIBLE** fuel pump, fuel filter and fuel lines.
- **SURVIVE IMPACTS** that could destroy lesser spindles with Toro's robust spindle assemblies.
- **SAVE DOWNTIME** with flat-free, semi-pneumatic caster tyres.
- **REDUCE OPERATOR FATIGUE** with a thick, cushioned, deluxe suspension seat that absorbs vibrations.



Z MASTER 7000 ACCESSORIES



RUBBER STRIPING KIT
107-1630
ROLLER STRIPING KIT
108-2162



OPERATOR CONTROLLED DISCHARGE CHUTE KIT
78521



MICHELIN X TWEEL TURF TYRES
60,7 cm (24") TWEEL
139-7891



TURBO FORCE® DECK
Works with the high-torque diesel engine for outstanding results at higher ground speeds.

RECYCLER KITS
140-8016 (72264TE)
140-8017 (72265TE)
114-1820 (72279TE)

Z MASTER 7000 ADDITIONAL FEATURES



DIESEL ENGINES
Lower fuel consumption and more efficient than comparable petrol engines. Diesel fuel also contains about 18% more energy by volume for extra power.



LIQUID-COOLED ENGINE SYSTEM
Extends engine life with cleaner combustion. Plus, a well-balanced engine keeps vibration to a minimum.



BIODIESEL READY ENGINES
Accept up to 20% biodiesel (B20) fuel blends, which can cut emissions nearly in half vs. traditional diesel fuel (based on EPA-designed engine tests)



TOUGH SPINDLES
Cast aluminum sealed spindles survive impacts that would destroy lesser spindles, thanks to a stout cast iron housing and massive base.

LIMITED
QUANTITIES
 AVAILABLE

Z MASTER 7000 SPECIFICATIONS

MODEL	72279TE	72264TE	72265TE
CUTTING WIDTH	132 cm (52")	132 cm (52")	▶ 152 cm (60")
DEFLECTOR WIDTH	173 cm (68")	173 cm (68")	▶ 193 cm (76")
ENGINE	16,6 kW (23 hp) Kubota®, 898 cc, Diesel	16,6 kW (23 hp) Kubota®, 898 cc, Diesel	16,6 kW (23 hp) Kubota®, 898 cc, Diesel
GROUND SPEED	0-18 km/h (11 mph)	0-18 km/h (11 mph)	0-18 km/h (11 mph)
DECK TYPE	TURBO FORCE® Rear Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge
DECK HEIGHT	140 mm (5.5")	140 mm (5.5")	140 mm (5.5")
HEIGHT OF CUT	38-127 mm (1.5" - 5")	38-127 mm (1.5" - 5")	38-127 mm (1.5" - 5")
SPINDLES	Cast Aluminum, Sealed	Cast Aluminum, Sealed	Cast Aluminum, Sealed
DRIVE TYRES	58 x 24 - 30 cm; 4-ply (23" x 9.5 - 12") 4-ply	58 x 24 - 30 cm; 4-ply (23" x 9.5 - 12") 4-ply	▶ 61 x 30 - 30 cm; 4-ply (24" x 12" - 12") 4-ply
CASTER TYRES	33 x 16,5 - 15 cm (13" x 6.5" - 6") Flat-free Semi-Pneumatic	33 x 16,5 - 15 cm (13" x 6.5" - 6") Flat-free Semi-Pneumatic	33 x 16,5 - 15 cm (13" x 6.5" - 6") Flat-free Semi-Pneumatic
FUEL/CAPACITY	Diesel/ 45 L (12 gal)	Diesel/ 45 L (12 gal)	Diesel/ 45 L (12 gal)
WEIGHT*	733 kg (1616 lbs)	733 kg (1616 lbs)	722 kg (1520 lbs)
WARRANTY	5-Years or 1200 hours. ² 2-Year Limited Warranty for Engine. ¹		

* Net Weight - machine without fuel
¹ Some products used on Toro LCE Products are warranted by the engine manufacturer.
² Whichever occurs first

▶ = Enhanced or step-up feature

POWER AND MANOEUVRABILITY EASY TO OPERATE

Z MASTER® 7500-D SERIES PROFESSIONAL
ZERO TURN MOWERS

30.000 - 36.500
(7.5-9.0)

Square Meters (Acres)/Hour
Maximum meters² (acres) per hour based on 90% efficiency
KMPH x width of cut (MPH x width of cut).
Actual productivity dependent upon conditions.

Z MASTER 7500-D FEATURES

For a powerful mower that's easy to operate, check out the Toro® Z Master® 7500-D. It delivers all the speed and manoeuvrability of a zero-turn, along with the superior cut quality you expect from Toro.

- **POWER THROUGH** the toughest mowing jobs with a Yanmar® diesel engine.
- **MAXIMIZE PRODUCTIVITY** with rear discharge commercial cutting decks ranging from 152-183 cm (60"-72").
- **MOW SMARTER** with Horizon® Technology that lets you choose the right operating mode for the conditions, saving fuel costs while maintaining top-level performance.
- **RIDE IN COMFORT** with the iso-mounted floor pan and deluxe suspension iso-mount seat that dramatically reduce vibration for less operator downtime and more productivity.

Z MASTER 7500-D ADDITIONAL FEATURES



EXTENDED SERVICE INTERVALS

Save on maintenance with extended service intervals and a deck design that uses up to four matching blades. The mower is also backed by a 5-year, 2,000-hour limited warranty (first two years no-hour-limit).



SUPERIOR PERFORMANCE

Powered by a Tier 4/Stage 5 compliant, three-cylinder, 18,6 kW (25 hp) or 27,6 kW (37 hp) Yanmar diesel engine, this mower is packed with power to tackle the toughest mowing jobs.



HORIZON™ TECHNOLOGY

Choose the right operating mode for mowing conditions, saving fuel costs while maintaining top-level performance with our Horizon Technology.



Z MASTER 7500-D ACCESSORIES



SUNSHADE KIT
126-8077

JACK MOUNT KIT
135-1768

JACK KIT
127-6666

WORKLIGHT KIT
135-7076

ANTI-SCALP & WEAR BAR KIT
127-6650

RECYCLE KIT*
152 CM (60") - 144-0379
183 CM (72") - 144-0380

*Blades not included.

Z MASTER 7500-D SPECIFICATIONS

MODEL	72028 Horizon Technology	72029 Horizon Technology	72065 Horizon Technology	72074 Horizon Technology
CUTTING WIDTH	152 cm (60")	183 cm (72")	152 cm (60")	183 cm (72")
ENGINE	18,6 kW (25 hp) Yanmar® Diesel 1267cc	18,6 kW (25 hp) Yanmar® Diesel 1267cc	27,6 kW (37 hp) Stage V Yanmar Diesel 1642cc	27,6 kW (37 hp) Stage V Yanmar Diesel 1642cc
GROUND SPEED	20,1 km/h (12.5 mph)	20,1 km/h (12.5 mph)	20,1 km/h (12.5 mph)	20,1 km/h (12.5 mph)
DECK TYPE	7-Gauge TURBO FORCE® Rear Discharge	7-Gauge TURBO FORCE Rear Discharge	7-Gauge TURBO FORCE Rear Discharge	7-Gauge TURBO FORCE Rear Discharge
DECK HEIGHT	14,0 cm (5.5")	14,0 cm (5.5")	14,0 cm (5.5")	14,0 cm (5.5")
HEIGHT OF CUT	2,5 - 14,0 cm (1.0" - 5.5")	2,5 - 14,0 cm (1.0" - 5.5")	2,5 - 14,0 cm (1.0" - 5.5")	2,5 - 14,0 cm (1.0" - 5.5")
SPINDLES	Cast Aluminum, Maintenance-Free	Cast Aluminum, Maintenance-Free	Cast Aluminum, Maintenance-Free	Cast Aluminum, Maintenance-Free
DRIVE TYRES	26" x 12" - 12" (66.0 x 30.5 x 30.5 cm)	26" x 12" - 12" (66.0 x 30.5 x 30.5 cm)	26" x 12" - 12" (66.0 x 30.5 x 30.5 cm)	26" x 12" - 12" (66.0 x 30.5 x 30.5 cm)
CASTER TYRES	15" x 6" - 6" (38.1 x 15.2 x 15.2 cm) Flat-Free Semi-Pneumatic	15" x 6" - 6" (38.1 x 15.2 x 15.2 cm) Flat-Free Semi-Pneumatic	15" x 6" - 6" (38.1 x 15.2 x 15.2 cm) Flat-Free Semi-Pneumatic	15" x 6" - 6" (38.1 x 15.2 x 15.2 cm) Flat-Free Semi-Pneumatic
FUEL/CAPACITY	Diesel/ 47,3 L (12.5 gal)	Diesel/ 47,3 L (12.5 gal)	Diesel/ 47,3 L (12.5 gal)	Diesel/ 47,3 L (12.5 gal)
WEIGHT*	887,7 kg (1957 lbs.)	890,9 kg (1964 lbs.)	969 kg (2136 lbs.)	972 kg (2143 lbs.)
CE KIT REQUIRED	144-0378	144-0410	144-0378	144-0410
WARRANTY	5 years or 2000 hours. ² 3-Year Limited Warranty for Engine ¹			

* Net Weight - machine without fuel
¹ Some products used on Toro LCE Products are warranted by the engine manufacturer.
² Whichever occurs first

▶ = Enhanced or step-up feature

PERFECT CUT & UNMATCHED COLLECTION PERFORMANCE

PROLINE H800 & Z MASTER® 8000 SERIES PROFESSIONAL DIRECT COLLECT MOWERS

DESIGNED FOR High Performance Use

The ProLine H800 can mow, collect and dispose of up to 12000 m² (3 acres) of material per hour!

PROLINE H800 FEATURES

The ProLine H800 direct collect rotary mower with highlift dump mechanism was engineered for unmatched collection performance and its cutting system delivers a high performance clean quality cut – crucial for sports fields and business complexes. Featuring a powerful Yanmar® engine; fast groundspeed; our innovative Smart Airflow® direct collection design; and high-lift system that dumps clippings directly into truck beds, the ProLine H800 can mow, collect and dispose of up to 12000 m² (3 acres) of material per hour!



SMART AIRFLOW SYSTEM

Get the job done faster with direct grass collection.



SMART COOL® WITH AUTO REVERSING FAN

Maximize collection performance and minimize down-time by preventing engine overheating.



UP TO 1,95 M (77") DUMP HEIGHT

The ProLine H800 empties clippings effortlessly.



EASY ACCESS CONTROLS

Hydraulic lift, hydraulic tip to dump, and adjust the cutting height from the operator seat.

Z MASTER 8000 FEATURES

For high-end properties, a clean, manicured look is essential. The Z Master 8000 Series deliver a superior quality of cut and a refined finish at more productive mowing speeds– crucial for sports fields and business complexes.

A powerful blower moves more air, allowing large volumes of material to be thrown into the hopper. And the high-capacity collection system helps extend mowing time.



FILL-REDUCTION SYSTEM

Switches from 100% bagging to 50% recycling and 50% bagging, so the hopper can be emptied less frequently.



HIGH CAPACITY HOPPER

Means less time emptying and more time mowing. Exclusive baffle design fills the 33 cm³ hopper evenly back to front for maximum efficiency.



TOUGH, DEEP DECKS

Made of welded 7/10-gauge steel, the deep 11,7 cm design handles taller grass and provides greater vacuum for a clean, refined cut.



REAR DISCHARGE DECK

Allow for trimming on either side, keeping flower beds and walkways clipping-free with the rear discharge deck.



PROLINE H800 SPECIFICATIONS

MODEL	31050TE
WIDTH OF CUT	126 cm (50")
ENGINE	18,4 kW (24,7 hp) Yanmar; 3-cylinder,
GROUND SPEED	0-15 km/h (0-9.3 mph). Reverse: 0-10 km/hr (6.2 mph)
DECK TYPE	Formed and welded deck with front bull-nose bumper. Direct grass collection.
DECK HEIGHT	4.6" (116 mm) top of deck shell to bottom of deck shell
HEIGHT OF CUT	20-110 mm (0.8-4.3")
SPINDLES	25 mm diameter spindles mounted in two greaseable bearings.
DRIVE TYRES	Front: 58,4 x 26,5 – 30,5 cm (23" x 10.5" - 12") Turf Tyres. Rear: 45,5 x 18,8 x 20 cm (18" x 7.5" - 8") Turf Tyres
CASTER TYRES	22,8 x 8,9 - 10,2 cm (9" x 3.5" - 4"); semi-pneumatic
FUEL/CAPACITY	Diesel / 41 L (10.8 gal)
WEIGHT*	With Cutting Deck 980 kg (2160 lbs); Without Cutting Deck 810 kg (1786 lbs)
WARRANTY	Two-year limited warranty. Refer to the Operator's Manual for further details.
COLLECTION SYSTEM	
VOLUME	810 L (214 gal)
MAXIMUM DUMP HEIGHT	1950 mm (77") with 300 mm overhang

Z MASTER 8000 SPECIFICATIONS

MODEL	74311TE
CUTTING WIDTH	122 cm (48")
ENGINE	15,3 kW (20,5 hp) Kohler Command Pro 640 cc
GROUND SPEED	0-11 km/h (0-7 mph)
DECK TYPE	Commercial rear discharge and mulching deck
DECK HEIGHT	188 mm (7.5")
HEIGHT OF CUT	25-100 mm (1"-4")
SPINDLES	Cast Iron
DRIVE TYRES	45,5 x 26,5 – 25,5 cm (18" x 10.5" - 10")
CASTER TYRES	20 X 7.5 - 10 cm (8" x 3" - 4") Semi Pneumatic
FUEL/CAPACITY	Petrol/ 28 L (7.5 gal)
WEIGHT*	544 kg (1199 lbs)
WARRANTY	2-Year Limited Warranty. ² 3-Year Limited Warranty for Engine ¹

* Net Weight – machine without fuel
¹ Some products used on Toro LCE Products are warranted by the engine manufacturer.
² Whichever occurs first



Z MASTER 8000 ACCESSORIES



MVP KIT
130-8468

MULCH KIT
130-8463

LEFT HAND MULCHING BLADE (25")
130-8464

RIGHT HAND MULCHING BLADE (25")
130-8465

LARGE AREA MOWERS

WHAT'S NEW?

GROUNDMASTER® ROTARY MOWERS
Groundskeeper large area rotary mowers are the standard by which all other mowers are measured. With cutting widths up to 16' (4.88 m), you can mow down a hectare of grass in 7 minutes.* The brawny frames and welded steel cutting deck construction ensure a long life and a solid return on your investment.

Despite their rugged appearance, these mowers are surprisingly nimble and leave no uncut grass in turns for more productive trimming.

The new Groundskeeper 3200/3300 Series manoeuvres and adapts to any environment, making quick work of maintaining a wide variety of public spaces.



TABLE OF CONTENTS

ROTARY MOWERS:			
GROUNDMASTER 3200/3300	32	GROUNDMASTER 3500-D, 3505-D, 4300-D, 4500-D, & 4700-D	36
GROUNDMASTER 4000-D/4010-D, 4100-D/4110-D, & 5900-D/5910-D	34	REEL MOWERS:	
		REELMASTER® 3100-D, 3550-D, 3555-D/3575-D, & 7000-D	38
		REEL & FLAIL MOWERS:	
		LT2240, LT3340, T4240, LT-F3000	40
		PULL BEHIND MOWERS:	
		GROUNDMASTER 1200 & TM7490	42

SUPERIOR MANOEUVRABILITY & VERSATILITY

GROUNDMASTER® 3200/3300 ROTARY MOWERS

GROUNDMASTER 3200/3300

From wide open spaces to family picnic areas, from flower gardens to playgrounds, maintaining the sheer variety of public spaces requires equipment that can manoeuvre and adapt to any environment.

With machines like the Groundskeeper 3200/3300, Toro® offers solutions that efficiently flex to any need.



Blower Attachment 31916

Snow Plow Attachment 17830

COMING SOON

FLAIL DECK

2022



Groundskeeper 3300 AWD Model 31907 and Groundskeeper 3310 AWD CAB 31909 are **not** EPA Tier 4 and Stage V compliant and **not** sold in European markets

GROUNDMASTER® 3200/3300



Groundskeeper 3200/3300



OUT-FRONT PERFORMANCE

Experience superior operator comfort with adjustable seating, tilt steering, easy access controls provide optimal operator comfort. The Groundskeeper 3200/3300 climbs and navigates uneven terrain and delivers a clean finish with the CrossTrax® all-wheel drive system and a best-in-class ground clearance of 19,8 cm (7.8") for 3200 and 21,6 cm (8.3") for 3300/3310.

UNMATCHED ACCESS

Innovative flip-up design makes maintenance and cleaning simple. Rotary decks tilt almost 90° while keeping the driveline intact.

ALL-SEASON CAB

All-season cab with heat and air conditioning is standard on Groundskeeper 3310. Optional heat-only cab (no air conditioning) for other models.

GROUNDMASTER 3200/3300 SPECIFICATIONS

MODEL	GROUNDMASTER 3200 2WD 31900	GROUNDMASTER 3200 AWD 31901	GROUNDMASTER 3300 AWD 31902	GROUNDMASTER 3310 AWD CAB 31903	GROUNDMASTER 3300 AWD 31907	GROUNDMASTER 3310 AWD CAB 31909
ENGINE	18,4 kW (24.7 HP) @ 3000 rpm Yanmar®, 3 Cylinder, liquid cooled diesel. EPA Tier 4 and Stage V compliant		27,9 kW (37.4 HP) @ 3000 rpm Yanmar, 3 Cylinder, liquid cooled diesel EPA Tier 4 and Stage V compliant		27,9 kW (37.4 HP) @ 3000 rpm Yanmar, 3 Cylinder, liquid cooled diesel Not EPA Tier 4 and Stage V compliant; not sold in European markets	
FUEL / CAPACITY	45 L (12 gal)		45 L (12 gal)		45 L (12 gal)	
WIDTH OF CUT	152 cm (60"); 183 cm (72"); F60 Flail deck: 152 cm (60") Side and rear discharge options		152 cm (60"); 183 cm (72"); F60 Flail deck: 152 cm (60") Side and rear discharge options		152 cm (60"); 183 cm (72"); F60 Flail deck: 152 cm (60") Side and rear discharge options	
MOWING RATE	2,5-3,0 hectares/hr* (6.1-7.4 acres)		2,5-3,0 hectares/hr* (6.1-7.4 acres)		2,5-3,0 hectares/hr* (6.1-7.4 acres)	
TRACTION DRIVE	2WD Parallel Hydraulic Traction System.	Patented CrossTrax® AWD.		Patented CrossTrax® AWD.		
GROUND SPEED	0-20 km/h (0-12.5 mph)		0-24 km/h (0-15 mph)		0-24 km/h (0-15 mph)	
WARRANTY	Two-year limited warranty. Refer to the Operator's Manual for further details.				Two-year limited warranty. Refer to the Operator's Manual for further details.	

*Assumes max mow speed and 100% efficiency. Actual mowing rates may vary depending on operator and conditions.
**Not EPA Tier 4 and Stage V compliant; not sold in European markets



TORO F60 FLAIL CUTTING UNIT

The new F60 Flail cutting deck (02835) for Groundskeeper models: 31900; 31901; 31902 and 31903 tackles short or long grass equally well.


LARGE SCALE PRODUCTIVITY

GROUNDMASTER® 4000-D/4010-D, 4100-D/4110-D, & 5900-D/5910-D
ROTARY MOWERS



GROUNDMASTER

Groundmaster large area mowers help you do more with less, covering larger areas with longer grass that's cut less frequently. But don't let the rugged appearance fool you. These mowers are surprisingly nimble and offer the ability to mow a zero uncut circle for maximum productivity. With cutting widths up to 488 cm (192"), you can mow a hectare of grass in 7 minutes.

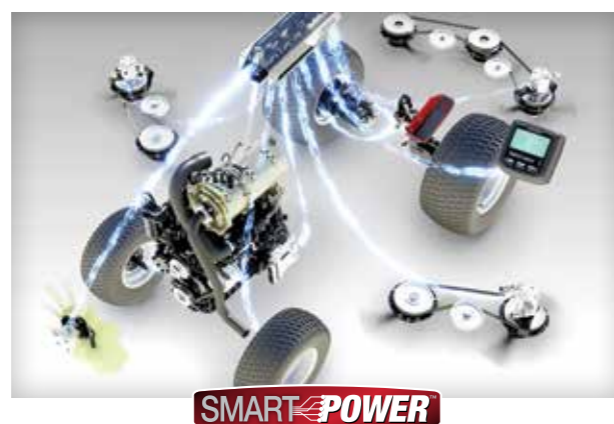

PRODUCTIVITY FOR ALL SKILL LEVELS

The Smart Power® feature automatically adjusts the traction unit ground speed to provide more power to the blades when needed for optimal cutting in any conditions. This feature improves fuel efficiency and enhances productivity for both inexperienced operators and seasoned professionals.

GROUNDMASTER FEATURES



GROUNDMASTER 5900/5910

With a 4,88 m (16') width of cut and precise maneuverability, this durable proven performer can mow over 8,5 hectares/hr (20.9 acres/hr)* and 0° uncut circle, leaving no uncut grass in turns. The three independent rear discharge cutting units quickly raise or lower on the fly.



GROUNDMASTER 4100-D

This innovative large area rotary mower features an out-front mower deck for superior operator visibility and outstanding productivity.



GROUNDMASTER SPECIFICATIONS

MODEL	GROUNDMASTER 4000-D/4010-D 30609 / 30636	GROUNDMASTER 4100-D/4110-D 30608 / 30644	GROUNDMASTER 5900-D/5910-D 31698 / 31699
ENGINE	Yanmar 4TNV86CT 41 kW (55 hp) EPA Tier 4 and Stage V compliant	Yanmar 4TNV86CT 41 kW (55 hp) EPA Tier 4 and Stage V compliant	Yanmar 4TNV98CT 53.7kW (72 hp) EPA Tier 4 and Stage V compliant
FUEL/CAPACITY	Ultra-Low Sulfur Diesel (<15 ppm). 79,5 L (21 gal)	Ultra-Low Sulphur Diesel(<15 ppm) 79,5 L (21 gal)	Ultra-Low Sulphur Diesel(<15 ppm) 132 L (35 gal)
WIDTH OF CUT	158 cm-355 cm (62"- 132")	137 cm-315 cm (54"-124")	145 cm-488 cm (57"-192")
MOWING RATE	4,5 hectares/hr* (11.1 acres)	4,2 hectares/hr* (10.4 acres)	8,5 hectares/hr* (21 acres)
TRACTION DRIVE	4WD. Smart Power® feature.	4WD. Smart Power® feature.	4WD. Smart Power® feature. CrossTrax®
GROUND SPEED	Transport: 0-26,1 km/h (0-16.2 mph), Mow: 0-13,4 km/h (0-8.3 mph)	Transport: 0-26,1 km/h (0-16.2 mph), Mow: 0-13,4 km/h (0-8.3 mph)	Transport: 0-32,2 km/h (0-20 mph); Mow: 0-17,4 km/h (0-10.8 mph)
WARRANTY	Two-year limited warranty. Refer to the Operator's Manual for further details.		

*Assumes max mow speed and 100% efficiency. Actual mowing rates may vary depending on operator or conditions.
**Not EPA Tier 4 and Stage V compliant; not sold in European markets



GROUNDMASTER 4000-D

The strongest, most productive 3,35 m (11') mower available today. With its 41 kW (55 hp) Yanmar® turbo-charged diesel engine, you can quickly mow through a variety of cutting conditions.



GROUNDMASTER 4010-D

The Groundmaster 4010-D is outfitted with a climate-controlled safety cab. Operators work comfortably in a fully enclosed, factory-installed cab with a four-post rollover protection structure (ROPS) and tempered safety glass.

LOWER COSTS AND RAISE PRODUCTIVITY

GROUNDMASTER® 3500-D, 3505-D, 4300-D, 4500-D, & 4700-D ROTARY MOWERS

GROUNDMASTER FEATURES

Keep sports fields and grounds in top condition with Groundsmaster contour mowers. Their free-floating Contour™ Plus cutting units deliver a superior cut on undulating terrain without scalping — all with the maintenance ease of a rotary mower.



REDUCE DOWNTIME WITH SMART COOL®

The Smart Cool system prevents overheating by briefly reversing the cooling fan to blast chaff and debris from the air intake screens. There's no need for the operator to stop and exit the machine to clear off debris. (Groundsmaster 4500-D/4700-D)

GROUNDMASTER ADDITIONAL FEATURES



Groundsmaster® 3500-D Sidewinder®

PRECISION TRIMMING

The Groundsmaster 3500-D features the innovative Sidewinder cutting system, which slides the cutting units up to 30,5 cm right or left from centre to trim hard-to-reach areas. The tyre tracks can also be shifted within the mowing path to reduce wear on the turf.



Groundsmaster 3505-D

FAST, HIGH-QUALITY STRIPING

The Groundsmaster 3505-D features three independent decks that cut as low as 1,9 cm, offering a productive 183 cm total width of cut. Full deck rollers deliver a precision cut and a high-quality striping effect on sports fields.



Groundsmaster 4300-D Model 30853 is not EPA Tier 4/Stage V compliant.

GROUNDMASTER SPECIFICATIONS

MODEL	GROUNDMASTER 3500-D SIDEWINDER® 30807	GROUNDMASTER 3505-D 30849	GROUNDMASTER 4300-D 30853 30864	GROUNDMASTER 4500-D 30885	GROUNDMASTER 4700-D 30887
ENGINE	Kubota 18,5 kW (24.8 hp)	Kubota 18,5 kW (24.8 hp)	Kubota 32,4 kW (43.4 hp) Yanmar® 32,4 kW (43.4 hp)	Yanmar® 41 kW (55 hp)	Yanmar 41 kW (55 hp)
FUEL/CAPACITY	Diesel 42 L (11 gal)	Diesel 42 L (11 gal)	Diesel 51,1 L (13.5 gal) Diesel 51,1 L (13.5 gal)	Ultra-low Sulfur Diesel 83 L (22gal)	Ultra-low Sulfur Diesel 132 L (35 gal)
WIDTH OF CUT	173 cm (68") 183 cm (72") optional	183 cm (72"); 173 cm (68") optional	229 cm (90")	277 cm (109")	381 cm (150")
MOWING RATE	1,7 hectares/hr* (4.2 acres)	1,8 hectares/hr* (4.4 acres)	2,6 hectares/hr* (6.4 acres)	3,56 hectares/hr* (8.8 acres)	4,9 hectares/hr* (12.1 acres)
TRACTION DRIVE	3WD	2WD	4WD. CrossTrax®	4WD	4WD
GROUND SPEED (TRANSPORT/MOW)	0-14 km/h (0-9 mph) 0-10 km/h (0-6 mph)	0-14 km/h (0-9 mph) 0-10 km/h (0-6 mph)	0-16,7 km/h (0-10 mph) 0-11,3 km/h (0-7 mph)	0-21 km/h (0-13 mph) 0-10,4 km/h (0-6.5 mph)	0-21 km/h (0-13 mph) 0-10,4 km/h (0-6.5 mph)
WARRANTY	Two-year limited warranty. Refer to the Operator's Manual for further details.				

* Assumes max mow speed and 100% efficiency. Actual mowing rates may vary depending on operator and conditions.



Groundsmaster 4300-D

SUPERIOR HILL-CLIMBING

The Groundsmaster 4300-D features the CrossTrax® all-wheel drive system, which automatically transfers power from the front tyres to the opposite rear tyres to maximise traction on hills and wet terrain. Five cutting units closely follow contours for an even cut.



Groundsmaster 4500-D/4700-D



Smart Cool™

MAXIMUM PRODUCTIVITY

Groundsmaster 4500-D/4700-D. The best of both worlds: large rotary mowers that devour hectares of turf, and ultra-precise cutting machines. Features include class-leading 41,1 kW engine, full-time bi-directional 4-wheel drive and SmartPower. The Groundsmaster 4500-D and 4700-D delivers superior handling and control that will keep you moving at peak performance.

THE KEY TO FINE TURF




REELMASTER® 3100-D. 3550-D 3555-D/3575-D. 7000-D.
REEL MOWERS

REELMASTER 3100-D. 3550-D 3555-D/3575-D. 7000-D

REELMASTER® 3100-D. 3550-D 3555-D/3575-D. 7000-D FEATURES

For high-end premier sports fields, consistent quality of cut is essential. Toro® Reelmaster® mowers feature Dual Precision Adjustment (DPA) cutting units that are designed to hold adjustments longer, providing a manicured fine-turf appearance with less maintenance.

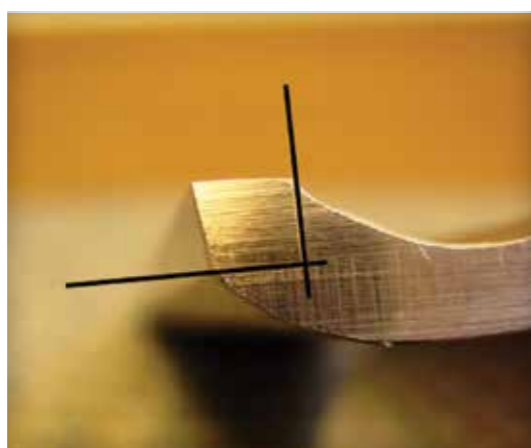

MAINTAIN YOUR CUTTING EDGE

Toro EdgeSeries™ reels feature new reel geometry and blade material for enhanced edge retention and a more accurate cut — with fewer adjustments and less grinding required.

REDUCE MAINTENANCE TIME AND COSTS

Toro's EdgeMax™ bedknives are designed with a tool-steel insert for maximum edge retention and wear life that's up to three times longer than standard bedknives.

Featuring
EdgeSeries® Reels



REELMASTER 3100-D, 3550-D, 3555-D/3575-D, & 7000-D SPECIFICATIONS

MODEL	REELMASTER® 3100 03170/03171	REELMASTER 3550-D 03910	REELMASTER 3555-D/3575-D 03820/03821	REELMASTER 7000-D 03780
ENGINE	Kubota 16,0 kW (21.5 hp)	Kubota 18,5 kW (24.8 hp)	Kubota 18,5 kW (24.8 hp)	Yanmar 41 kW (55 hp)
FUEL/CAPACITY	Diesel 28,3 L (7.5 gal)	Diesel 28,3 L (7.5 gal)	Diesel 28,3 L (7.5 gal)	Diesel 83 L (22 gal)
WIDTH OF CUT	183 cm (72") / 216 cm (85")	208 cm (82")	254 cm (100")	307 cm (121")
MOWING SPEED	0-10 km/h (0-6 mph)	0-11,3 km/h (0-7 mph)	0-11,3 km/h (0-7 mph)	0-11,3 km/h (0-7 mph)
TRACTION DRIVE	3WD	Series/Parallel 3WD	Series/Parallel 3WD	4WD
GROUND SPEED	Transport: 0-14 km/h (0-9 mph) Mow: 0-10 km/h (0-6 mph)	Transport: 0-16,1 km/hr (0-10 mph) Mow: 0-11,3 km/h (0-7 mph)	Transport: 0-16,1 km/hr (0-10 mph) Mow: 0-11,3 km/h (0-7 mph)	Transport: 0-22,5 km/h (0-14 mph) Mow: 0-11,3 km/h (0-7 mph)
WARRANTY	Two-year limited warranty. Refer to the Operator's Manual for further details.			



Reelmaster 3100-D Sidewinder

TRIM IN HARD-TO-REACH AREAS

The Reelmaster 3100-D features Toro's Sidewinder® system that allows operators to shift all three reels left or right on the fly to reach turf that other mowers cannot. Model 03171.



Reelmaster 3550-D

FLOAT OVER UNDULATING TERRAIN

The Reelmaster 3550-D floats effortlessly over contours and is one of the lightest reel mowers of its kind on the market. It also features turf-friendly tyres and the superior traction of a Series/Parallel 3-wheel-drive system.



Reelmaster 3555-D & 3575-D

20% LIGHTER THAN A TRADITIONAL REEL MOWER

Productivity, efficiency, simplicity and lighter weight, are all packed into the compact chassis of the Reelmaster 3555-D & 3575-D. The result is a mower that delivers the performance you expect from Toro, in a size that is highly manoeuvrable, and engineered to decrease turf compaction in sensitive areas.



Reelmaster 7000-D

EXTREME PRODUCTIVITY

The Reelmaster 7000-D is designed for heavy-duty productivity and performance in the most extreme conditions. Key features include the Smart Cool® auto-reversing fan and a productive 307 cm width of cut, as well as a powerful diesel engine and high-torque reel motors.



HEAVY-DUTY VERSATILITY

LT2240 / LT3340 / T4240 / LT-F3000
REEL & FLAIL MOWERS



REEL & FLAIL MOWERS

From heavy-duty municipal mowing to fine turf, these mowers deliver the quality and performance you demand. Choose from a range of models and an extensive selection of cutter units and accessories to fine-tune your equipment for your individual needs.



MK.3 CUTTING UNIT DELIVERS A FIRST-CLASS FINISH

Proven design promotes more even reel wear and superior impact resistance for municipal mowing environments, increased number of blade/bedknife contact points increases strength and durability. Cutting units available in 200 mm and 250 mm diameters with 4 to 10 blades (10 blades in 200 mm only). Suited for everything from fine-turf applications to densely packed, overgrown municipal grass.



T4240 Model 02750 is **not** EPA Tier 4/Stage V compliant.

REEL & FLAIL MOWERS FEATURES



LT2240 - Compact Triple

COMPACT SIZE

The **LT2240** reel mower is ideal for areas with restricted access and limited manoeuvrability, its lightweight design makes it the perfect choice for operators both transporting and driving from site to site. From heavy-duty municipal mowing to fine turf, these mowers deliver the quality and performance you demand.



LT3340 - Heavy Duty Triple

HIGH PERFORMANCE

The robust heavy duty construction of the **LT3340** reel mower will meet the most demanding of environments. A range of high-performance commercial cutting units with numerous blade configurations will provide a perfect finish every time. The InfoCentre arm-rest operating console controls every task from light trimming to mowing dense overgrowth.

LIMITED
QUANTITIES
AVAILABLE



T4240 - Heavy Duty 5 Unit Mower

HIGH OUTPUT

The **T4240** can compete with tractor-drawn gang mowers in large open areas, but can also be used in confined spaces as a three- or five-unit machine.



LT-F3000 - Commercial Triple Flail

VERSATILE GAME CHANGER

The **LT-F3000** triple flail mower allows you to increase the length of time between cuts while retaining a premium finish. It's well suited for maintaining both long, rough grass and short, fine turf, so you can tackle a range of applications with one machine. Available with reel conversion kit.

REEL & FLAIL MOWERS SPECIFICATIONS

MODEL	LT2240 NEW 31654	LT3340 NEW 31657	T4240 02750	LT-F3000™ NEW 31659
ENGINE	Kubota D1105 18.5 kW (24.8 hp)	Yanmar 3TNV88C 27.5 kW (37 hp)	Kubota V1505 35.3 kW (47.3 hp)	Yanmar 3TNV86T Turbo 32.4 kW (43.4 hp)
FUEL/CAPACITY	Diesel / 45,7 L	Diesel / 60 L	Diesel / 70 L	Diesel / 60 L
WIDTH OF CUT	76,2 cm-212 cm (30"-83")	76,2 cm-212 cm (30"-83")	346 cm (136")	76,2 cm-212 cm (30"-83")
MOWING RATE	2,0 Hec/Hr (5 acres)	2,0 Hec/Hr (5 acres)	3,2 Hec/Hr (8 acres)	2,0 Hec/Hr (5 acres)
TRACTION DRIVE	CrossTrax® 4WD with automatic 4WD in reverse*	CrossTrax 4WD with automatic 4WD in reverse*	4WD hydrostatic diff-lock	CrossTrax® 4WD with automatic 4WD in reverse*
GROUND SPEED	Transport: 0-22 km/h (0-14 mph) Mow: 0-22 km/h (0-14 mph)	Transport: 0-25 km/h (0-15.5 mph) Mow: 0-25 km/h (0-15.5 mph)	Transport: 0-22,5 km/h (0-14 mph) Mow: 0-12,9 km/h (0-8 mph)	Transport: 0-25 km/h (0-15.5 mph) Mow: 0-25 km/h (0-15.5 mph)
WARRANTY	Two-year limited warranty. Refer to the Operator's Manual for further details.			

* Factory fit as standard from Spring 2022, continue to order as an accessory until February 2022.

UNMATCHED DURABILITY

GROUNDMASTER 1200 AND TM7490 PULL BEHIND MOWERS

PULL BEHIND MOWERS FEATURES

These pull behind mowers offer a cost effective and reliable solution for maintaining large areas, such as parks, playing fields and golf courses.

The Groundmaster® 1200 delivers an unparalleled combination of productivity, durability and superior cut.



QUICK TRANSPORT

The **Groundmaster 1200** wing decks fold up near vertical for a narrow 218,4 cm (86") transport width, making it easy to get from site to site.

PULL BEHIND MOWERS ADDITIONAL FEATURES



PRODUCTIVITY

The **Groundmaster 1200** lets you cut up to 3,5 hectares/hour (8.7 acres/hr) at 9,7 km/hr (6 mph) mow speed.



DURABILITY

The **Groundmaster 1200** saves time and powers through the toughest conditions with the same spindles as Toro's large rotaries.



SUPERIOR CUT

The **Groundmaster 1200** delivers an even, professional striped cut to large spaces.

PULL BEHIND MOWERS SPECIFICATIONS

GROUNDMASTER 1200	
MODEL	31905
TRACTOR REQUIREMENTS	Minimum 26,1 kW 35 hp) at the PTO, 540 RPM. Two hydraulic connections at the rear, at least 140 bar pressure
HEIGHT OF CUT	13 mm - 102 mm (0.5"- 4")
WIDTH OF CUT	3,7 meters (146")
MOWING RATE*	3,5 hectares/hr (8.7 acres/hr)
CUTTING UNIT REELS	-
TRANSPORT WIDTH	218,4 cm (86")
WARRANTY	Two-year limited warranty. Refer to the Operator's Manual for further details.

*Assumes 6 mph mow speed and 100% efficiency. Actual mowing rates may vary depending on operator and conditions.

Cuts up to
3,5
Hectares/hr



PRODUCTIVITY AND DURABILITY

The **Groundmaster 1200** saves time and powers through the toughest conditions with the same spindles as Toro's large rotaries and lets you cut up to 3,5 hectares (8.7 acres)* per hour.

TURF EQUIPMENT WHAT'S NEW?

DURABLE AND EASY TO MANOEUVRE

Toro's line of Turf Renovation equipment include the perfect tools for landscape contractors or homeowners with user-friendly controls, durable construction, and manoeuvrability to make overseeding an easy task.



Turf Renovation 61 cm (24") Stand-On Aerator

The 61 cm (24") stand-on model is powered by a Kohler® CH440 engine. Electronic depth control allows operators to provide consistent core depth and quality and its compact design fits through a standard 91 cm (36") wide gate.

TABLE OF CONTENTS

PROCORE®TURF CULTIVATION EQUIPMENT 46
TURF APPLICATION EQUIPMENT 48

MULTI PRO® SPRAYERS 50
TURF RENOVATION EQUIPMENT 52

HEALTHY TURF STARTS HERE.

PC 648, PC 864, PC 1298, PC SR54/PC SR54-S, PC SR70/PC SR70-S AND PC SR72
TURF CULTIVATION EQUIPMENT

TURF CULTIVATION EQUIPMENT

Healthy turf depends on managing compaction and ensuring the proper amount of air, water and nutrients can reach the roots. From aerators to topdressing to debris clearing equipment, Toro® has everything you need for a comprehensive cultivation program to ensure the health and vigour of your turf.



SMOOTH OPERATION
 The precision-balanced ProCore® coring head eliminates hopping, rocking and unnecessary vibration for some of the smoothest operating aerators on the market. (ProCore 648, 864 and 1298)

TURF CULTIVATION EQUIPMENT FEATURES



ProCore SR Series Deep-Tine Aerators

DEEP-TINE AERATION

ProCore SR Series deep-tine aerators feature a hydraulic depth adjustment that allows the operator to change tine depths from the seat of the tractor, increasing productivity. These models are powerful enough to use on the most compacted soil, yet have a light footprint on turf.



COMING SOON
PROCORE 648s
 APR 2022

ProCore® 648 Aerator

EFFICIENT WALKING AERATOR


The ProCore 648 walking aerator is designed with the wheels in front of the aeration head so you can make pass after pass without running over cores or freshly aerated turf. This prevents turf damage and makes clean-up easier. Quick turnarounds and a fast transport speed also enhance productivity.



ProCore 864/1298 Aerators

PRODUCTIVE AERATION WIDTH

ProCore 864 and 1298 large-area aerators maximise productivity with smooth operation and large aeration widths. Independent articulating coring heads on the 1298 provide superior ground following and consistent hole depth.

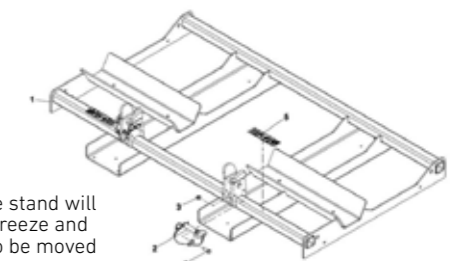


The PC 1298 storage stand will make unhooking a breeze and allows the aerator to be moved with pallet forks

TURF CULTIVATION EQUIPMENT SELECT ACCESSORIES



REAR ROLLER



TINE HOLDERS



WEIGHT KIT



WINDROW KIT



TYRE SCRAPERS

TURF CULTIVATION EQUIPMENT SPECIFICATIONS

MODEL	PC 648 09200	PC 864 09715	PC 1298W 09716	PC SR54/ PC SR54-S 09931/09932	PC SR70/ PC SR70-S 09933/09934	PC SR72 09935
POWER SUPPLY	17,2 kW (23 hp) Engine	22,4 kW (30 hp) Tractor	37 kW (50 hp) Tractor	13,4 kW (18 hp) Tractor	26,1 kW (35 hp) Tractor	33,6 kW (45 hp) Tractor
WORKING SPEED	1,2-2,4 km/h (0.75-1.5 mph)	0-4,2 km/h (0-2.6 mph)	0-4,2 km/h (0-2.6 mph)	1,2-2,4 km/h (0.75-1.5 mph)	2,4-4,0 km/h (1.5-2.5 mph)	1,3-2,4 km/h (0.8-1.5 mph)
AERATING WIDTH	122 cm (48")	163 cm (64")	249 cm (98")	137 cm (54")	185 cm (73")	183 cm (72")
AERATING DEPTH	Up to 102 mm (4")	Up to 127 mm (5")	Up to 127 mm (5")	Up to 254 mm (10")	Up to 254 mm (10")	Up to 406 mm (16")

CONSISTENTLY PROFESSIONAL RESULTS


TOPDRESSER 1800, TOPDRESSER 2500, PROPASS 200, MH-400
TURF APPLICATION EQUIPMENT

PP-200 & MH-400
Side Unloading Conveyor

Allows easy and precise placement of materials!

TURF APPLICATION AND DEBRIS EQUIPMENT FEATURES

Topdressing and material application are an integral part of any maintenance program. Toro® has the heavy-duty equipment you need for precise control and accurate application every time, from light topdressing to ultra-heavy material handling. And when you need to clear leaves, grass clippings or other organic debris, we also have solutions to help crews clean large areas faster than traditional methods —saving time and labour costs.

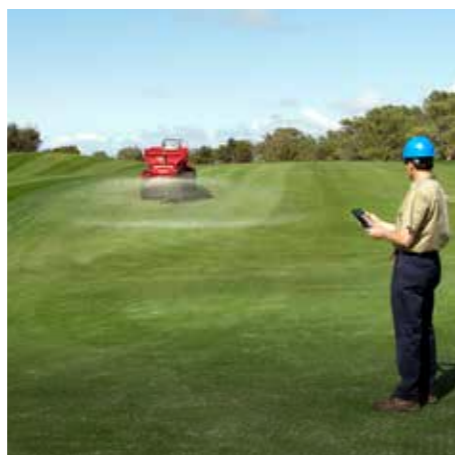

WIRELESS REMOTE OPERATION

The wireless controller (available for the ProPass™ 200 and the MH400) allows real-time adjustments. Make quick setting changes and store settings for future use. Base models feature a wired controller.



TOPDRESSER

For maximum performance and power choose the Toro® Topdresser 2500 - a self-contained, all-wheel drive unit towed by a Toro® Workman® or other utility vehicle. The 0.7 cu. m. (25 cu. ft) capacity coupled with 12.9 km/h (8 mph) topdressing speed will tackle the toughest topdressing jobs.

TURF APPLICATION AND DEBRIS EQUIPMENT ADDITIONAL FEATURES



ProPass 200

VERSATILITY AND PRECISION

ProPass 200 Series broadcast-style topdressers provide versatility and precise application, from light dustings to heavy aeration hole filling. The four-wheel walking-beam suspension ensures a light footprint on sensitive turf. Trailer and utility vehicle-mounted versions are available.



MH-400

LARGE-CAPACITY MATERIAL HANDLING

MH-400 material handlers tackle a wide variety of tasks, including applying mulch, backfilling and much more. Install the twin spinner accessory for topdressing and spreading everything from crumb rubber to fertilizer. A rear hitch receiver also allows towing other implements in tandem.



Topdresser 2500 / 1800

CONSISTENT PERFORMANCE FOR TOUGH JOBS

Topdresser 1800 and **2500** offer maximum performance and power, with a capacity of 502 L (132.6 gal) - Topdresser 1800, or 698 L (184.4 gal) - Topdresser 2500, and a 13 km/h topdressing speed for the toughest topdressing jobs. All-wheel drive ensures a consistent application rate on uneven terrain.

TURF APPLICATION AND DEBRIS EQUIPMENT SPECIFICATIONS

	PROPASS 200	MH-400		TOPDRESSER 1800	TOPDRESSER 2500
MODEL	44701/44751	44931/44954	MODEL	44225	44507
HOPPER CAPACITY	540 Ltr (142.6 gal) Struck 710 Ltr (187.6 gal) Heaped	3060 Ltr (808.4 gal)	DRIVE	Hydraulic engage/ disengage lever from operators console.	Ground driven, self contained hydraulics
CONTROLS	Standard or Electronic Wireless	Standard or Electronic Wireless	HOPPER CAPACITY	509 L (18 cu. ft.)	707 L (25 cu. ft.)
PAYLOAD	907 kg (2,000 lbs)	5353 kg (11,801.4 lbs)	TOPDRESSING WIDTH	152 cm (60")	152 cm (60")
			TOPDRESSING SPEED	13 km/h (8 mph)	13 km/h (8 mph)

LEADING TECHNOLOGY, PROVEN RELIABILITY, UNSURPASSED ACCURACY.

MULTI PRO® WM, MULTI PRO® 1750, MULTI PRO® 5800 SPRAYERS
TURF APPLICATION EQUIPMENT

MULTI PRO SPRAYERS

Extensive customer input and advanced sprayer technology are built into these innovative sprayers providing numerous performance and operational features.

Convert from sprayer
back to cargo bed
in as little as

20
minutes



Multi Pro® WM

MULTI PRO WM 757 L SPRAYER ACCESSORY

The Multi Pro WM advanced spray system for Toro's Workman® HD or HDX utility vehicle leverages the advanced spray system capability of Toro's dedicated sprayers, and combines this spray system functionality with cutting-edge and intuitive sprayer controls to create one of the most advanced, efficient and accurate 757 L (200 gal) sprayers on the market.

MULTI PRO FEATURES



Multi Pro 1750

MULTI PRO 1750 175-GALLON DEDICATED SPRAYER

This popular sprayer uses an advanced, high performance spray system design. Cutting-edge sprayer controls and productive vehicle features create one of the most advanced, efficient and accurate 662 L (175-gal) sprayers on the market. From aggressive agitation, faster rate response, consistent and accurate application rates, and intuitive rate set up, to precise vehicle control, this sprayer has it all.



Multi Pro 5800

MULTI PRO 5800 300-GALLON DEDICATED SPRAYER

Leading sprayer technology, proven reliability and innovative accessories provide many performance and operational advancements. Every aspect of the spray system has been engineered to deliver unsurpassed spray accuracy, aggressive agitation and faster response time. Consistently delivers desired spray rates and coverage in even the most demanding environments.



Multi Pro 1750 Model 41188 and Multi Pro 5800-G Model 41394 only.

MULTI PRO ACCESSORIES



EXCELARATE™ RATE CONTROL SYSTEM

makes achieving precise application rates simple and repeatable. Step-by-step calibration and memory of your two most commonly used rates saves time and increases accuracy. Developed by Toro exclusively for turf and standard on all Multi Pro 5800 machines!

NOZZALERT™ NOZZLE FLOW MONITORING SYSTEM

brings peace of mind to spray applications by alerting the operator to nozzle flow disparities caused by totally or partially blocked, broken, missing, or worn nozzles. From the comfort of the operators seat, a simple display gives visual and optional audible alerts when flow disparities are detected, allowing the operator the opportunity to correct before mis-application and resulting turf damage.

CLEANLOAD™ EDUCTOR is an on-board mixing station for safely loading any product without the need to first mix a slurry.

FRESH WATER RINSE KIT simplifies and automates the triple-rinse process, saving hours upon hours of clean-up time.

COVERED BOOM SHROUD mounts to existing boom and minimises spray drift in breezy conditions.

ULTRA SONIC BOOM KIT automatically maintains optimal boom height in undulating turf conditions.

ALSO AVAILABLE: Enclosed Cab, Sunshade Canopy, Electric Hose Reel, Pro Foam Marking Kit, Rear Work Light Kit and Boomless Nozzle Kit.

MULTI PRO SPECIFICATIONS

	MULTI PRO WM	MULTI PRO 1750	MULTI PRO 5800-G
MODEL	41240	41188	41394**
ENGINE	Workman HD Utility Vehicle Accessory	18,6 kW (25 hp) Kohler,® CH740 Command Series. Petrol	37,3 kW (50 hp) Kubota WG1605. Petrol
SPRAYER TANK	757 L (200 gal)	662 L (175 gal)	1135 L (300 gal)
BOOM	5,6 m (18.5') or optional 6,25 m (20.5'), 3-section	5,6 m (18.5') or optional 6,25 m (20.5'), 3-section	6,25 m (20.5'), 3-section

* MP 5800-D Model 41393 is not EPA Tier 4 and Stage V compliant, and will be obsolete once inventory is depleted.
** MP 5800-G Model 41394 is EPA Tier 4 and Stage V compliant and will be offered in place of Model 41393 in Europe.

HEALTHY TURF MAKES ALL THE DIFFERENCE.

51 CM (20") HYDRAULIC SEEDER, 61 CM (24") STAND-ON AERATOR, BRUSH CUTTER, BRC-28
TURF RENOVATION EQUIPMENT



TURF RENOVATION EQUIPMENT

The right aeration, seeding, and dethatching equipment makes all the difference. Toro's turf renovation line combines heavy-duty commercial durability with features that save time, including mower-inspired controls and exceptional maneuverability. You also get the speed and fuel capacity you need to push your productivity to the max.



SIMPLE CONTROLS

Easily manoeuvre this powerful brush cutter in both forward and reverse with the one-hand control feature. Both professional and novice operators alike will be able to master these intuitive traction controls.



POWERFUL ENGINE

The Toro story started over a century ago producing engines. Today they are built for longevity and raw power, matched perfectly to maximize performance of the product they control.

TURF RENOVATION EQUIPMENT FEATURES



51 CM (20") HYDRAULIC SEEDER

This hydraulic seeder handles like a self-propelled mower. Its wide frame allows for superior control and manoeuvrability on hills. It has an adjustable seed flow rate for varying applications.



61 CM (24") STAND-ON AERATOR**

Electronic depth control allows operators to provide consistent core depth and quality. Its compact design profile fits through standard 91 cm (36") wide gates, and a Smart Hour Meter displays core depth and critical maintenance reminders.

** Requires Intallation of CE Kit 135-7423

TURF RENOVATION EQUIPMENT SPECIFICATIONS

MODEL	23512 51 CM (20") HYDRAULIC SEEDER	29516 61 CM (24") STAND-ON AERATOR**	23522 BRUSH CUTTER, BRC-28	38700 POWER BROOM
ENGINE	Kohler® Command PRO® CH395	Kohler® CH440	Toro® with Electric Start	Kohler Command Pro Multi-Season
FUEL CAPACITY	6 L (1.5 gal)	7 L (1.8 gal)	4 L (1 gal)	4 L (1 gal)
CUTTING WIDTH	—	—	71 cm (28")	—
CUTTING HEIGHT	—	—	9,5 cm (3.75")	—
WORKING WIDTH	51 cm (20")	61 cm (24")	—	91 cm (36")
SEEDING DEPTH	Up to 2,5 cm (1")	Up to 12,7 cm (5")	—	—
WIDTH	76 cm (30")	90,2 cm (35.5")	90 cm (35")	118 cm (46.5")
HEIGHT	71 cm (28") (handle folded) 114 cm (45") (handle working)	130 cm (51")	101 cm (40")	105,5 cm (41.5")
LENGTH	96,5 cm (38") (handle folded) 137 cm (54") (handle working)	174 cm (68.5")	227 cm (89")	185 cm (73")
WEIGHT*	140,6 kg (310 lbs)	388 kg (856 lbs)	170 kg (375 lbs)	159 kg (350 lbs)
GROUND SPEED	Up to 4,8 km/h (3 mph) fwd Up to 3,5 km/h (2 mph) rev	Up to 11 km/h (7 mph) fwd Up to 3,5 km/h (2 mph) rev	Up to 5,5 km/h (3.4 mph) fwd Up to 3,2 km/h (2 mph) rev	Up to 9,5 km/h (6 mph) fwd Up to 3,0 km/h (2 mph) rev
SEED HOPPER CAPACITY	18 kg (40 lbs)	—	—	—
TINES/BLADES/BROOM	10 verticutting blades	19 mm hollow tines	Standard flail blade with 2 flails. Optional straight blade.	18 broom wafers

* Net Weight – machine without fuel
 ** Model 29516 requires installation of CE Kit 135-7423



BRUSH CUTTER, BRC-28

The BRC-28 levels tall brush, weeds, saplings and heavy vegetation. Its 71 cm (28") cutting deck increases operator productivity. Designed with simple intuitive traction controls and pivoting deck for easy manoeuvring on uneven terrain. The pivoting deck with a spring return has the flexibility of +/- 10 degrees making for easy manoeuvring over tough, uneven terrain.



POWER BROOM

Toro's Power Broom combines heavy-duty commercial durability with features that save time, including mower-inspired controls and exceptional manoeuvrability like Broom Angle Adjustment, Power Steering, and Independent Control Levers. You can use it year round to brush away snow, clear debris, and for turf maintenance.

SITWORKS EQUIPMENT & UTILITY VEHICLES

WHAT'S NEW?

IDEAL FOR LANDSCAPE, HARDSCAPE AND TREE CARE JOBS, THE TX 1300 BRINGS A NEW COMBINATION OF POWER, REACH AND CONVENIENT CONTROL TO THE TORO® DINGO® LINEUP.

With a 37 hp Yanmar® Stage V diesel engine and 590 kg (1,300 lbs) of rated operating capacity, it's the user-friendly workhorse you need to save time. The exclusive INTELESCOPE® loader arm with Smartload adds 67 cm (26") of reach, and the telescoped hinge-pin height of 277 cm (109") means you can lift loads up and over the side of a dumpster or truck for maximum productivity. Plus, you can operate the Toro patented traction controls with one hand and thumb-controlled telescoping extension and auxiliary functions (in the loader arm control) with the other to pick, place and dump materials with ease all day long.

Quick Coupler SYSTEM

Pressure relieving quick coupler system makes connection of attachments easier

Durable LOADER ARM

The improved q-tach casting allows for a more durable loader arm design

Integrated AUXILIARY OPERATION

Loader arm control eliminates secondary hydraulic operation

Intelescope LOADER ARM

TX 1300 features SmartLoad for a hinge-pin height of 277 cm (109") which adds 67 cm (26") of reach over other compact utility loaders

TABLE OF CONTENTS

SGR 13 & STX STUMP GRINDER
eDINGO® & DINGO®

56 DINGO® TRACKED & TX
58 DINGO ACCESSORIES
PRO SWEEP & PRO FORCE

60 WORKMAN MDX/HDX
62 WORKMAN GTX SERIES
66

68 OUTCROSS® 9060
70

72

RELIABILITY DAY IN AND DAY OUT

SGR 13 & STX STUMP GRINDER TREE CARE

TREE CARE EQUIPMENT

Unlike some stump grinders, Toro's design is not over-complicated. STX models feature Dingo® TX-style controls with two simple levers that are easy to learn and use. With tracked models that travel easily over muddy areas, Intelli-Sweep™ for optimal cutting performance, and transport speeds of over 6 km/h (4 mph), it's the perfect combination for maximum productivity. And the easy-to-operate SGR-13 handlebar stump grinder turns stumps into mulch without breaking a sweat.

- **GET OPTIMAL PERFORMANCE TIME** with the hydraulically driven head — no chance of expensive belts breaking or slipping, no adjusting tension, and no cogged pulleys or clutches to replace.
- **MAINTAIN OPTIMAL PERFORMANCE** with the Intelli-Sweep™ feature that automatically adjusts the sweep speed based on the load on the cutting wheel.
- **OPERATE WITH CONFIDENCE**, thanks to the tracked design that offers exceptional side hill control, as well as zero turn capability.

TREE CARE EQUIPMENT SPECIFICATIONS

MODEL #	SGR 13 / 22619	STX-26 / 23208	STX-38 / 23214
ENGINE	Honda GX390	Kawasaki® FX730V 726 cc	Kohler Command PRO ECV980 28.3 kW (38 hp)
DRIVE SYSTEM	-	Hydraulic	Hydraulic
CLUTCH	Centrifugal	NA	NA
CUTTING DEPTH	28 cm (11") below grade	31 cm (12") Below Grade	46 cm (18") Below Grade
CUTTING HEIGHT	36 cm (14") above grade	88 cm (34.5") Above Grade	88 cm (34.5") Above Grade
CUTTING WHEEL	24.3 cm (9.5") diameter cutter wheel	48 cm Diameter to Tooth, 1.9 cm Thick, 12 Greenteeth® Cutting Teeth	57 cm Diameter to Tooth, 2.5 cm Thick, 16 Greenteeth® Cutting Teeth
BELT	Double 3V Belt	NA	NA
HEAD SWING	NA	47° Sweep Arc	60° Sweep Arc
TRANSPORT SPEED	NA	7.2 km/h (4.5 mph)	7.2 km/h (4.5 mph)
DIMENSIONS (L x W x H)	75 cm x 193 cm x 107 cm (30" x 76" x 42")	198 cm x 87 cm x 122 cm	241 cm x 87 cm x 130 cm
WEIGHT	109 kg (240 lbs)	544 kg (1199 lbs)	794 kg (1751 lbs)

* Net Weight - machine without fuel

TREE CARE EQUIPMENT FEATURES



TORO'S PATENTED, EASY-TO-USE CONTROLS offer smooth operation with fewer levers/knobs than conventional stump grinders. An armrest near the joystick also reduces operator fatigue.

- 1 Steering system (forward, reverse, turn) allows for zero-turn capability
- 2 Sweep, lift/lower and engagement of the grinder head



SGR-13

EASY-TO-OPERATE AND SIMPLE TO MAINTAIN

The well-balanced **SGR-13** requires less "muscling" the machine while cutting. The SGR-13 is powerful yet nimble enough to access hard-to-reach stumps in close spaces. The exclusive cutting wheel with easily replaceable grinder teeth turns stumps into mulch without breaking a sweat.



STX-26

OPERATOR-FRIENDLY DESIGN

The **STX-26** also offers the Intelli-Sweep feature, along with an offset cutting head that gives the operator excellent visibility to the stump. This model features Toro's exclusive traction control system similar to Dingo TX and TRX trenchers, making it easy for new operators to learn and use.



STX-38

BUILT FOR OUTSTANDING DURABILITY IN THE TOUGHEST CONDITIONS

The **STX-38** gives you superior climbing capability, manoeuvrability and greater side hill control with a hi-drive track system. The electronic fuel injection (EFI) engine also offers easier starting, lower maintenance and improved performance. The all-hydraulic sweep control valve facilitates side-to-side feathering for superior stump grinding.

SAVE LABOUR AND FINISH FASTER.

e-DINGO®/DINGO® WHEELED COMPACT UTILITY LOADERS

E-DINGO®/DINGO® WHEELED

Access confined spaces you never thought possible with a wheeled Dingo® compact tool carrier. These models offer zero-turn capability, along with a shorter length that's easy to load on a trailer. You also get reliable hydraulic power to use a wide range of attachments. If you do a lot of tasks in tight spaces or on hard surfaces, these are the models for you.



DINGO® CONTROLS

Responsive controls make the wheeled Dingo highly manoeuvrable:

- 1 Curl or dump the attachment while raising or lowering the loader arms.
- 2 Raise and lower loader arms.
- 3 Traction drive control.
- 4 Activate the auxiliary circuit control lever to power the attachments instantly.

CHOOSE YOUR FUEL

Diesel fuel offers extra muscle for demanding jobs—dig, haul, plant, build and more.

Petrol fuel extends your working time with two durable 21-L fuel tanks for a full day of work.



E-DINGO®/DINGO® WHEELED SPECIFICATIONS

MODEL	E-DINGO® 22218	DINGO® 323 22318	DINGO 320-D 22337CP
ENGINE	48V Lithium ion batteries	Kohler® Command Series CH23	Kubota® D722
FUEL TYPE	NA	Petrol	Diesel
FUEL TANK	NA	42.4 L (11.2 gal)	15 L (4 gallon)
BATTERY	Lithium Ion	NA	NA
ELECTRIC SYSTEM VOLTAGE	48 V	NA	NA
BATTERY CAPACITY	9,12 kW	NA	NA
GROUND SPEED	0-4,4 km/h (2.75 mph)	0-6 km/h (0-3.7 mph)	0-4,8 km/h (0-3.0 mph)
OVERALL WIDTH	90 cm (35.6")	103 cm (40.5") standard tyres 90 cm (35.6") narrow tyres	103 cm (40.5") standard tyres 90 cm (35.6") narrow tyres
TIP CAPACITY	467 kg (1,030 lbs)	467 kg (1,030 lbs)	475 kg (1,048 lbs)
WEIGHT	941,7 kg (2,076 lbs)	711 kg (1,567 lbs)	781 kg (1,722 lbs)

* Net Weight – machine without fuel

E-DINGO®/DINGO® WHEELED FEATURES



THE POWER YOU NEED

Lift heavy loads with a rated operating capacity of 233,6 kg (515 lbs). ECO Mode, Auto Idle and Inch Mode features also extend runtime and maneuverability.



RUNS DINGO ATTACHMENTS

Expand your versatility with 24,6 lpm (6.49 gpm) hydraulic power pumps that can run most Dingo attachments, including augers up to 30,5 cm (12").



RELIABLE PERFORMANCE

Lithium-ion batteries are designed to last the life of the traction unit, and the 4-Paw® independent 4-wheel drive system delivers maximum traction.



LOW MAINTENANCE

Fully hydraulic design with no chains to maintain. Rugged components offer solid performance with low maintenance throughout the machine's life.



HIGHLY MANOEUVRABLE

Short wheelbase design offers excellent manoeuvrability. Get into tight spaces where only hand labour could go before.



TWO TRANSPORT SPEEDS

Low speed sends more hydraulic power to the attachment and high speed sends more power to the wheels.



IMPROVED VISIBILITY

The integrated ride-on operator platform allows improved visibility of the working area and attachments.



4-PAW® INDEPENDENT FOUR-WHEEL DRIVE

Four independent wheel motors deliver hydraulic flow and pressure to all four wheels for improved traction and mobility.



Now available with lithium-ion technology!



No fuel, just green



Zero Engine Exhaust Emissions



Quiet Operation

DO MORE WORK IN LESS TIME

DINGO® TRACKED/TX COMPACT UTILITY LOADERS

DINGO® TRACKED & TX

Tracked Dingo models deliver the durability and reliability that professionals and do-it-yourselfers trust, combined with powerful performance and incredible versatility. For operators who are frequently switching tasks or moving things out of the way, these walk-behind models provide greater productivity — just walk up to the machine and go.

REACH HIGHER

The TX 1300 brings a new combination of power, reach and convenient control to the Toro® Dingo® lineup.



**NEW TX 1300
TELESCOPING
22370**

LIMITED
QUANTITIES
AVAILABLE

**TX 525
22323 and 22324**

DINGO® TRACKED & TX FEATURES



UNMATCHED STRENGTH
Vertical lift loader arms allow the TX 1000 to lift and transport heavy loads with a category-leading 488 kg (1,075 lbs).



MAXIMUM HEIGHT AND REACH
The 206 cm (81") hinge pin height allows attachments to easily clear the side of dumpsters. (TX 1000 only)



LOW-IMPACT FOOTPRINT
Long-lasting, Kevlar® reinforced tracks disperse weight evenly for a light footprint on turf, while delivering better traction in any ground conditions including sand, mud, gravel, rock, concrete or asphalt.



EASY-TO-USE PLATFORM
Quickly and easily bolted on to Toro TX 427 & 525 models, this ride-on platform helps minimise operator fatigue when the job requires a lot of hauling or covers substantial distances. The platform can be flipped up – out of the way – any time the operator wishes.



COMING SOON

DINGO TX 700

2022

GO WHERE YOU NEED TO WORK

The narrow models are just 86 cm (33.7") wide and fit through 100 cm (36") gates. At just 104 cm (41") wide, the wide-track model is also easy to manoeuvre.



DINGO® TRACKED & TX 1000 SPECIFICATIONS

MODEL #	TX 427 NARROW TRACK 22321	TX 427 WIDE TRACK 22322	TX 525 NARROW TRACK 22323	TX 525 WIDE TRACK 22324	TX 1000 NARROW TRACK 22327	TX 1000 WIDE TRACK 22328	TX 1300 TELESCOPING 22370 NEW
ENGINE	Kohler® Command Pro Series CH 740		Kubota D902		Kubota® D1305		Yanmar, Tier 4
FUEL TYPE	Petrol		Diesel		Diesel		Diesel
FUEL TANK	23 L (6.0 gal)		23 L (6.0 gal)		44 L (11.5 gal)		42 L (11 gal)
GROUND SPEED (F/R)	0-7.2 km/h (0-4.5 mph) / 0-3.2 km/h (0-2.0 mph)		0-7.2 km/h (0-4.5 mph) / 0-3.2 km/h (0-2.0 mph)		6.1 km/h (3.8 mph) F&R	7.6 km/h (4.7 mph) F&R	7.6 km/h (4.7 mph)
OVERALL WIDTH	86 cm (33.7")	104 cm (41")	86 cm (33.7")	104 cm (41")	86 cm (33.7")	104 cm (41")	117 cm (46")
TIP CAPACITY	694 kg (1530 lbs)		717 kg (1580 lbs)		1296 kg (2857 lbs)	1393 kg (3071 lbs)	1685 kg (3714 lbs)
WEIGHT	856 kg (1887 lbs)	940 kg (2072 lbs)			1318 kg (2905 lbs)	1337 kg (2948 lbs)	1610 kg (3,550 lbs)

* Net Weight – machine without fuel

**PETROL+DIESEL
MODELS AVAILABLE**

MANY ATTACHMENTS, ONE GOAL: PRODUCTIVITY

DINGO® COMPACT UTILITY LOADER

DINGO ACCESSORIES

A wide variety of attachments make the Dingo® a more cost-effective choice than a dedicated piece of equipment. These genuine Toro® attachments are designed specifically for the Dingo, offering the best assurance of long life and peak performance.

Attachment Model # 22445



Toro Quick Attach System

Change Attachments In Seconds

1. Mount to the attachment plate on the unit.
2. Twist the pins to locked position.
3. For powered attachments, connect hydraulic lines to dripless flush-face quick couplers on loader arms.

AUGER BITS AND EXTENSIONS

MODEL	ATTACHMENT DESCRIPTION
22814	46 cm (18") Auger Bit
22815	61 cm (24") Auger Bit
22816	76 cm (30") Auger Bit
22818	30 cm (12") Auger Bit Extension
22819	61 cm (24") Auger Bit Extension
22820 •	15 cm (6") Full Flight Auger Bit
22821 •	23 cm (9") Full Flight Auger Bit
22822 •	30 cm (12") Full Flight Auger Bit
22823	38 cm (15") Full Flight Auger Bit

• e-Dingo compatible attachments



Attachment Model # 22473

AUGERS AND TREE CARE

MODEL	ATTACHMENT DESCRIPTION	DIMENSIONS (W X L X H)	WEIGHT (KG)
22429	Stump Grinder (w/chip guard)	112 cm x 51 cm x 79 cm	120
22438	Tree Fork (max load 82 kg)	62 cm x 114 cm x 32 cm	77
22341 •	Adjustable Fork	79 cm x 114 cm x 69 cm	73
22577 •	Grapple Rake	90 cm x 46 cm x 76 cm	120
22805 •	High-Torque Auger Power Head	61 cm x 41 cm x 58 cm	83
22806 •	Universal Swivel Auger Power Head	61 cm x 43 cm x 58 cm	89
22590 •	Grapple Bucket	85 cm x 79 cm x 53 cm	115

• e-Dingo compatible attachments
Auger head is e-Dingo compatible when used with augers 12" and smaller



HIGH-TORQUE
TRENCHER HEAD
22473



STUMP GRINDER
22429



GRAPPLE RAKE
22577



TREE FORK
22438



ADJUSTABLE FORKS
22341



HIGH-SPEED
TRENCHER HEAD
22474



BORE DRIVE HEAD
ANDROD & REAMER KIT
22420



VIBRATORY PLOW
22911



TRENCH FILLER
22472



HIGH-TORQUE AUGER
POWER HEAD
22805



UNIVERSAL SWIVEL
AUGER POWER HEAD
22806

TRENCHING, PLOWING AND BORING ATTACHMENTS

MODEL	ATTACHMENT DESCRIPTION	DIMENSIONS (W X L X H)	WEIGHT (KG)
22420	Bore Drive Head Attachment (Bore diameter 3.2-8.9 cm)	61 cm x 56 cm x 63.5 cm	54.4
22421	Rod and Reamer (Bore diameter 3.2-11.3 cm)	-	26.3
22472	Trench Filler	122 cm x 79 cm x 56 cm	186
22473	High-Torque Trencher Head	89 cm x 165 cm x 61 cm	177
22474	High-Speed Trencher Head	89 cm x 165 cm x 61 cm	177
22911	Vibratory Plow	74 cm x 89 cm x 61 cm	181.4

*Working Width

GET THE JOB DONE

DINGO® COMPACT UTILITY LOADER

DINGO ACCESSORIES

Uses for the Toro® Dingo and its various attachments are limited only by your imagination.



Attachment Model # 22577



SOIL CULTIVATOR
23102



POWER BOX RAKE
22426



TILLER
22445



CEMENT BOWL
22442



LEVELER
23165



MULTI-PURPOSE TOOL
22423

BUCKETS

MODEL	ATTACHMENT DESCRIPTION	DIMENSIONS (W X L X H)	WEIGHT (KG)	CAPACITY (L)
22409 •	4 cu.ft. Standard Bucket	107 cm x 61 cm x 35,6 cm	52	110
22410 •	Loose Materials Bucket	122 cm x 66 cm x 46 cm	79	180
22520 •	Narrow Bucket	88 cm x 68 cm x 64 cm	69	100
22340	TX 1000 Standard Bucket	104 cm x 58 cm x 38 cm	78	120
22342	TX 1000 High Volume Bucket	135 cm x 74 cm x 43 cm	115	250
22478 •	4-n-1 Bucket	122 cm x 68 cm x 55 cm	132	Struck = 76 Heaped = 93

• e-Dingo compatible attachments

EARTH MOVING EQUIPMENT

MODEL	ATTACHMENT DESCRIPTION	DIMENSIONS (W X L X H)	WEIGHT (KG)
22426	Direct Drive Power Box Rake	122 cm x 124 cm x 53 cm	166
22445	102 cm (40") Tiller	112/102 cm Tilling Width x 51 cm x 66 cm	165
23102	Soil Cultivator	130 cm x 130 cm x 53 cm	165
23165 •	Leveler	80 cm x 105 cm x 69 cm	73

• e-Dingo compatible attachments

MATERIAL HANDLING

MODEL	ATTACHMENT DESCRIPTION	DIMENSIONS (W X L X H)	WEIGHT (KG)
22423	Multi-Purpose Tool	61 cm x 10 cm x 25 cm	18
-	Boom Jib*	2 cm x 82 cm x 24 cm	10,5
-	Scarifier Teeth*	5 cm x 33 cm x 30 cm	4
22442	Cement Bowl		34
22414 •	Utility Blade	122 cm x 64 cm x 53 cm	96

* Available in Multi-Purpose Tool (22423)

• e-Dingo compatible attachments

MISCELLANEOUS

MODEL	ATTACHMENT DESCRIPTION	WEIGHT (KG)
22475	TX Platform (Petrol)	43
22476	TX Platform (Diesel)	43
22417	Counter Weight	83
23135 •	Hydraulic Concrete Breaker	119
22585	Snow Thrower, Compact Tool Carrier	NA
22584	Snow Canopy, TX 1000 Compact Tool Carrier	NA

• e-Dingo compatible attachments

CANGINI-ALLIED HARDSCAPE EQUIPMENT

CANGINI MODEL	DESCRIPTION	USED ON
WGF1100	Front Woods Grab	TX1000, TX1300
SPZ120	Sweeper Bucket	TX1000, TX1300
VF600	Front Screening Bucket	TX1300
MIX150SF	Mixing Bucket w/ Safe Discharge	TX1300



Attachment Model # 22426



FRONT SCREENING BUCKET
VF600



MIXING BUCKET W/ SAFE DISCHARGE
MIX150SF




FRONT WOODS GRAB
WGF1100



SWEeper BUCKET
SPZ120



BUCKETS
22409, 22410, 22520, 22340, 22342



MANUAL OR HYDRAULIC FORKS
22341



UTILITY BLADE
22414



Attachment Model # 22805

CLEARLY DEPENDABLE AND EFFICIENT

PRO SWEEP & PRO FORCE DEBRIS EQUIPMENT

DEBRIS EQUIPMENT

PRO SWEEP FEATURES

DEBRIS EQUIPMENT FEATURES

When you need to clear leaves, grass clippings or other organic debris, we also have solutions to help crews clean large areas faster than traditional methods —saving time and labour costs.



PRO SWEEP®

Faster than traditional methods of collecting aeration cores and other organic debris. Brush height adjustment accommodates a variety of turf conditions. The standard hydraulic offset allows you to move the sweeper from the hydraulic position to the collection position.



EFFICIENT TURBINE-TYPE FAN ASSEMBLY DESIGN

Greater air flow to move debris further and finish the job faster.



CONTROL FROM THE OPERATOR'S SEAT

The Pro Force® debris blower comes with a wireless remote control that lets you start and stop the engine, adjust the engine throttle up and down, and rotate the nozzle 360 degrees – all from the seat of a utility vehicle.



ELECTRONIC GOVERNOR

Coupled with functionality of wireless remote control, the Kohler® electronic governor allows the operator to have precise engine speed control.



HEAVY-DUTY TRAILER & TOW HITCH

Height and length of tow hitch are adjustable to accommodate different towing utility vehicles.

DEBRIS EQUIPMENT SPECIFICATIONS



WIRELESS RF REMOTE CONTROL

Only the Pro Sweep comes with a handheld wireless remote that lets you control sweeping and dumping operations with the touch of a button.



HIGH-LIFT DUMP

The high-lift dump provides the ability to dump all the cores easily into the bed of a Toro Workman or trailer and empty the hopper completely.



WINDROW BLADE

The windrow blade directs cores away from the tyre so they won't be crushed.

DEBRIS EQUIPMENT SPECIFICATIONS

MODEL	PRO SWEEP® 07068	PRO FORCE™ 44552/44553/44554
SWEEP WIDTH	132cm (52")	NA
POWER SUPPLY	18,6 kW (25 hp) tractor or utility vehicle,* tow required	18,3 kW (24.6 hp) engine, D.O.T/trailered/teathered/tow required
HOPPER CAPACITY	762 L	NA
FAN DESIGN	NA	High-efficiency, axial flow, turbine-type fan assembly
FAN DIAMETER	NA	36cm



Pro Sweep®

FAST DEBRIS COLLECTION

The Pro Sweep® debris sweeper lets you adjust the roller height for the turf conditions. The exclusive floating brush housing rotates from side to side and front to back to collect cores on uneven terrain. Plus, the wireless remote lets you control sweeping and dumping functions with the touch of a button.



Pro Force®

MAXIMUM AIR FLOW

The Pro Force turbine debris blower provides greater air volume flow to move debris further and finish faster. It's ideal for blowing leaves, grass clippings, cores and other organic debris off turf and hard surfaces alike.

TOOLS FOR EVERY TASK

WORKMAN MDX, MDX-D, & WORKMAN HD FEATURES

WORKMAN MDX/HDX SERIES UTILITY VEHICLES

WORKMAN MDX/HDX

Toro® has all the reliable, efficient solutions you need for a full range of grounds maintenance tasks. Round out your fleet with Toro Workman® utility vehicles.

Workman® HDX vehicles provide durability, excellent driving performance and versatility. Optional 4-wheel drive models available.

Experience the Workman® MDX Series with SRQ™ for optimum operator comfort and enhanced productivity. The hard work shouldn't start until you get to the job site.



30°

ACTIVE IN-FRAME™ TWISTER JOINT

The Workman MDX innovative Active In-Frame™ Twister Joint allows each axle to react independently to the terrain.

Active In-Frame™ Twister Joint delivers a smooth ride over the most undulating surfaces.



DISC BRAKES

The Workman HDX 4 wheel hydraulic disc brakes provide greater stopping power and easier servicing than traditional drum brakes.



DEDION REAR AXLE

The DeDion rear axle, standard on the Workman HDX, isolates the engine, transmission and main frame from all load forces, eliminating stress to these main components.



PAYLOAD CAPACITY

The Workman HDX cargo bed capability up to 1520 kg (3,352 lbs). The Workman MDX cargo bed capability up to 748 kg (1,650 lbs).



TOUGH FRAMES

The Workman® front space frame design is multi-dimensional or truss like, providing superior strength and torsional rigidity in rough terrain. The rear frame uses a C-channel design to provide superior strength in hauling heavy loads.



748 kg
(1650 lbs)
Payload Capacity

Workman® MDX Series



1,520 kg
(3352 lbs)
Payload Capacity

Workman HDX Series

SMOOTH RIDE

Workman MDX Series utility vehicles enhance productivity and operator comfort with Superior Ride Quality (SRQ™) and the highest total carrying capacity in their class.

ADDED CAPACITY

Workman HDX Series utility vehicles combine strength and durability with outstanding payload and towing capacity for your most demanding jobs. Many attachments are available for added versatility.

WORKMAN MDX, MDX-D, & WORKMAN HD ACCESSORIES



CANOPY



DELUXE HARD CAB



FOLDING WINDSHIELD



SPRAYER
200 GALLON (757 L)



PROPASS™ 200

WORKMAN MDX, MDX-D, & WORKMAN HD SPECIFICATIONS

MODEL	WORKMAN MDX 07235TC	WORKMAN MDX-D 07236TC	WORKMAN HD SERIES 07384TC, 07385TC, 07386TC, 07387TC
ENGINE	Briggs & Stratton® 480 cc (14hp)	Kubota® 599 cc (19hp)	Kubota® 972 EFI, 962 cc (32.5 hp) Kubota 950 cc (23.3 hp) Kohler 674 cc (23 hp)
FUEL	Petrol	Diesel	Diesel or Petrol
TOTAL CAPACITY	750 kg	750 kg	1252 kg - 1364 kg
TOWING CAPACITY	545 kg with heavy-duty hitch	545 kg with heavy-duty hitch	1587 kg with trailer brake

MORE CONTROL, COMFORT, POWER, & VERSATILITY. SIMPLY SUPERIOR.

WORKMAN GTX. GTX EFI/LIFTED.* GTX-E & GTX LITHIUM-ION LIFTED UTILITY VEHICLES

WORKMAN GTX LITHIUM-ION POWER

Lithium-Ion Power Option

Maintenance free, improved power-to-weight ratio, extended battery life, and largest cargo capacity in its class, the Lithium-Ion GTX is a machine that's always ready to get to work.



Now available with lithium-ion technology!

WORKMAN GTX SERIES FEATURES

The Workman GTX is a work vehicle that boasts an unequalled combination of comfort, power, utility and control, making it simply superior to the competition. Its increased power, improved steering and exclusive suspension and braking systems make the Workman GTX the most versatile, practical and comfortable utility vehicle in its class. With its narrow 120 cm (47") width, petrol or electric power, and hundreds of configurable options, attachments and seating choices, running to different jobs has never been so productive.



Workman GTX Lithium Ion Lifted



SUSPENSION

Coil-over shocks on all four tyres delivers greater suspension travel and adjustability resulting in a smoother ride and minimized operator fatigue.

GTX LITHIUM-ION POWER

Cargo Capacity – At 363,8 kg (800 lbs), the GTX Lithium provides you with the largest cargo capacity of any lithium-ion vehicle in its class.

Maintenance-Free – Lithium-Ion packs require no maintenance which allows you to spend less time checking batteries and more time checking tasks off your to-do list.

Extended Battery Life – Lithium-Ion battery packs give you the power for long days and reduced charging time for short nights.

Onboard Charger – No need to keep track of your charger, it is onboard and ready to be connected to any standard power outlet anytime, anywhere.

Reduced Weight – The GTX Lithium is 26% lighter than a traditional electric vehicle, making it nimble while still packing plenty of all-day power.

WORKMAN GTX SERIES & LIFTED MODELS SPECIFICATIONS

MODEL	07059TC/ INT'L LIFT KIT: 07414 WORKMAN GTX EFI/LIFTED*	07131TC WORKMAN GTX-E	07413TC WORKMAN GTX LITHIUM-ION LIFTED
ENGINE/MOTOR	Kohler® EFI 429 cc	48V brushless AC induction drive	48V brushless AC induction drive
FUEL TYPE	Petrol	Electric	Electric
TOTAL CAPACITY	544 kg	544 kg	544 kg
TOWING CAPACITY	680 kg with heavy-duty hitch	680 kg with heavy-duty hitch	680 kg with heavy-duty hitch

WORKMAN GTX SERIES ACCESSORIES: 300+ CONFIGURATION OPTIONS



FOLD DOWN REAR-FACING SEAT



NEW STEEL GTX CARGO BED



RACKING SYSTEM



183 CM FLATBED



Workman GTX EFI Lifted



LIFTED MODELS

Workman GTX Lifted models boast an additional 7,6 cm (3") of ground clearance, and stylish turf friendly 55,8 cm (22") turf tyres with modern 30,5 cm (12") aluminum wheels. Available in both EFI Gas and Lithium-Ion powertrain options.

Visit toro.com or call your local distributor for a full list of available Workman GTX Series accessories and attachments.

DO MORE.

OUTCROSS® 9060 UTILITY VEHICLES

OUTCROSS® 9060

The Outcross 9060 is an invaluable tool in the long-standing battle Grounds Managers face to “do more with less.” This machine is a time-saving, easy-to-use, multi-purpose, turf-friendly workhorse that brings year-round flexibility, consistency and productivity to turf maintenance operations. Get ready to do more.



Its balanced design, four-wheel steer, and four-wheel drive make it extremely gentle on turf, while the Outcross's 3-point hitch, drawbar, and front loader keep it busy year-round. Intuitive automotive-style controls and one-time parameter setup keeps even complex operations simple and efficient.

GET READY TO DO MUCH MORE.

Mow grass, spread fertilizer, load sand, haul a pallet of sod, aerate, topdress, remove snow and ice, blow leaves, prune roots, spread seed, tow a trailer, sweep a path, chip wood, and much more.

OUTCROSS® 9060 ACCESSORIES



Visit toro.com or call your local distributor for a full list of available accessories and attachments.

OUTCROSS® 9060



INTUITIVE CONTROLS

Operation is simple and intuitive. The **Outcross 9060** has a hydrostatic drive system. Cruise control, shuttle shifting, a passenger seat, and one-action controls add to the ease-of-use and efficiency.



ATTACHMENT PARAMETERS

Set-up and save each attachment to ensure the machine performs exactly to your specifications. Save settings for up to sixteen attachments.



THREE-POINT HITCH

A category II three-point hitch makes attaching and using a myriad of Toro and third-party attachments another way to do more.



ROOM FOR TWO

Outcross's second seat brings a second laborer to the jobsite. The standard utility bed offers plenty of space for tools and equipment that previously would have also required a second vehicle.



All-Season Cab with loader arms and bucket

GENTLE ON TURF

The **Outcross 9060's** unique electronically controlled four-wheel steer and four-wheel drive system provide turf friendliness and maneuverability. Each wheel turns and spins independently for gentle turning and superior traction. Outcross's balanced design removes the need for front counterweights, making it significantly more delicate on turf than an agricultural tractor.




Canopy with Standard Bed




Canopy with Cargo Bed

CONSISTENCY

Set-up and save the parameters for each attachment – one time, up front - to ensure the machine performs exactly to your specifications. Store settings for up to sixteen attachments for ease of use and consistent performance, no matter the skill level of the operator in the seat.



Standard Bed, 453,6 kg (1,000 lbs) capacity



Optional Cargo Bed, 2041 kg (4,500 lbs) capacity

VERSATILITY

The **Outcross 9060** will always be on the move. With 3-point, drawbar, cargo bed and loader capabilities, the opportunities to maximize this investment are nearly endless. The Outcross 9060 does the work of multiple machines in one compact package. Put your investment to work every day and receive consistency, efficiency, and reliability in return.

OUTCROSS® 9060 SPECIFICATIONS

MODEL	OUTCROSS 9060
ENGINE	44 kW (59 hp) turbo-charged, liquid-cooled
FUEL	Diesel
CARGO CAPACITY	Up to 2041 kg (4,500 lbs)*
TOWING CAPACITY	Up to 7257 kg (16,000 lbs)**
LOADER LIFT CAPACITY	998 kg (2,200 lbs) Lift height: 272 cm (107") 3-Point Hitch, Category 2. Lift capacity 61 cm (24") behind lift point: 1134 kg (2,500 lbs)

See Commercial Equipment Guide for complete specifications.
*With cargo bed installed. ** Trailer weight, when equipped with trailer brakes.

WALK BEHIND SMALL AREA MOWERS

COMPARE KEY FEATURES TO HELP FIND THE MOWERS THAT FIT YOUR APPLICATION.



MODEL	22291 / 22283	22280 / 22285	22275 / 22275T KIT / BARE TOOL	22207	02657
CUTTING WIDTH	53 cm (21")	53 cm (21")	53 cm (21")	▶ 76 cm (30")	56 cm (22")
ENGINE/MOTOR	Kawasaki® FJ180V KAI, 4-cycle, 179 cc	Kawasaki FJ180V KAI, 4-cycle, 179 cc	2.0kW 60V Brushless	Kawasaki FJ180V KAI, 4-cycle, 179 cc	Kawasaki FJ180V KAI OHV 4-cycle, 179 cc
STARTER	Recoil, Zone Start	Recoil, Blade Brake Clutch	Electric	Recoil, Blade Brake Clutch	Recoil, Zone Start, Blade Brake Clutch
AIR FILTER	Dual Element	Dual Element	—	Dual Element	Dual Element
DRIVE SYSTEM	Fixed speed, Rear Wheel Drive	▶ 3-speed, Rear Wheel Drive	Fixed speed, Rear Wheel Drive	Heavy Duty Variable Speed Rear Wheel Drive	3-Speed Self Propelled
DECK CONSTRUCTION	Recycler®/Rear Bag Corrosion resistant 6 mm (0.24") aluminium	Recycler/Rear Bag Corrosion resistant 6 mm (0.24") aluminium	Recycler/Rear Bag Corrosion resistant 6 mm (0.24") aluminium	▶ 13 gauge heavy duty steel, cast aluminium frame	Recycler/Rear Bag Corrosion resistant 6 mm (0.24") aluminium
BLADES	3,4 mm (0.13") thick steel with blade stiffener	3,4 mm (0.13") thick steel with blade stiffener	3,4 mm (0.13") thick steel with blade stiffener	3,4 mm (0.13") thick steel with blade stiffener	3,4 mm (0.13") thick swaged steel blade
BLADE ENGAGEMENT	Zone Start (ZS)	▶ Blade Brake Clutch	—	Blade Brake Clutch	Blade Brake Clutch
HEIGHT OF CUT / ADJUSTMENT	25 mm – 114 mm (1" - 4.5"), 4 point	25 mm – 114 mm (1" - 4.5"), 4 point	25 mm – 114 mm (1" - 4.5"), 4 point	▶ 38 mm - 127 mm (1.5" - 5") in 6 mm (0.24") increments	13-60mm 13-position, 3.25mm increments
SPEED	0-6.0 km/h (0-3.7 mph) forward	0-6.0 km/h (0-3.7 mph) forward	0-6.0 km/h (0-3.7 mph) forward	Variable up to 6.4 km/h (3.98 mph) forward	3.0; 4.0; 5.2 km/h (1.9; 2.5; 3.2 mph)
FUEL/CAPACITY	Petrol / 1,9 L (0.5 gal)	▶ Petrol / 3,8 L (1 gal)	Two 7.5Ah Lithium Ion batteries and 5.5A Rapid charger included	Petrol / 3,8 L (1 gal)	Petrol / 1,7 L (0.45 gal)
LUBRICATION	Forced splash lubrication	Full-pressure lubrication (with oil filter)	—	Full-pressure lubrication (with oil filter)	Forced lubrication w/oil pump
TYRES	23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels	23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels	23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels	23 cm x 6 cm (9" x 2.5") Rubber tyres with poly wheels	27 cm x 8 cm (10.5" x 3") Rubber tyres with cast wheels
REAR ROLLER	—	—	—	—	13 cm (5") Steel ribbed roller
BAG CAPACITY	77 L (20 gal)	77 L (20 gal)	77 L (20 gal)	▶ 88 L (23 gal)	80 L (21 gal)
WEIGHT	50 kg (110 lbs)	56 kg (124 lbs)	43 kg (95 lbs) Without battery	85 kg (187 lbs)	66 kg (146 lbs)
HAND ARM VIBRATION	2,7 m/s ²	2,7 m/s ²	1,0 m/s ²	6,2 m/s ²	—
COMMERCIAL WARRANTY	1 Year, Full Coverage, 2 Year, GTS**	1 Year, Full Coverage, 2 Year, GTS**	1 Year, Full Coverage Warranty*	1 Year, Full Coverage, 2 Year, GTS**	2 Year Limited Warranty*

MODEL	02615	02616	02617
CUTTING WIDTH	40 cm (16")	▶ 46 cm (18")	▶ 53 cm (21")
ENGINE	Honda GXV57	Honda GCVx170	Honda GCVx170
STARTER	Recoil Start	Recoil Start	Recoil Start
DRIVE SYSTEM	Push	Push	Push
CUTTER SYSTEM	Nylon Line	Nylon Line	Steel Cutting Blade
HEIGHT OF CUT / ADJUSTMENT	18 - 30 mm (0.7" - 1")	18 - 30 mm (0.7" - 1")	16 - 34 mm (0.63" x 1.5")
FUEL CAPACITY	0.27 L (0.1 gal)	▶ 0.99 L (0.24 gal)	0.99 L (0.24 gal)
SLOPE ANGLE	25°	▶ 45°	45°
WEIGHT	12,5 kg (28 lbs)	18,5 kg (40.8 lbs)	19.3 kg (42.5 lbs)

USER-FRIENDLY FEATURES

RECOIL START	Standard	Standard	Standard
FOLDING HANDLEBAR	Standard	Standard	Standard
QUICK STORAGE HANDLEBAR	Standard	Standard	Standard
HEIGHT ADJUSTABLE HANDLEBAR	Standard	Standard	Standard
SOFTGRIP HANDLEBAR	Standard	Standard	Standard
OPERATOR PRESENCE CONTROL	Standard	Standard	Standard
EXTENSION HANDLEBAR - KIT	—	▶ Optional	Optional
TRANSPORT WHEELS - KIT	—	▶ Optional	Optional
HI-RISE - KIT	Optional	Optional	—
COMMERCIAL WARRANTY	2-Year Limited Warranty	2-Year Limited Warranty	2-Year Limited Warranty

* Refer to Operator's Manual for further details.

** GUARANTEED TO START. Refer to Operator's Manual for further details.

▶ = Enhanced or step-up feature

▶ = Enhanced or step-up feature

MID-SIZE & GRANDSTAND® MOWERS

COMPARE KEY FEATURES TO HELP FIND THE MOWERS THAT FIT YOUR APPLICATION.



MID-SIZE
HYDRO POWER TRACTION UNIT



PROLINE
HYDRO POWER TRACTION UNIT



GRANDSTAND
STAND-ON MOWER



MODEL	31914	44410TE	44424TE
CUTTING WIDTH	▶ 82 cm, 91 cm, 122 cm (32", 36" or 48")	91 cm (36")	122 cm (48")
ENGINE	Kawasaki® FS541V, 4-cycle, 603 cc, OHV V-Twin, 11.2kW (15 hp)	Kawasaki FS481V, 4-cycle, 603 cc, Air-cooled, 10.8kW (14.5 hp)	Kawasaki FS541V, 4-cycle, 603 cc, OHV V-Twin, 11.2kW (15 hp)
STARTER	▶ Electric	Electric	Electric
AIR FILTER	Standard	Standard	Standard
DRIVE SYSTEM	Twin Hydro-gear® pumps with Parker® wheel motors	Twin Hydro-gear® pumps	Twin Hydro-gear® pumps
CONTROL SYSTEM	Pistol Grips	Twin Lever	Twin Lever
DECK CONSTRUCTION	TURBO FORCE® Rear Discharge or Flail ▶ 2, 3 or 4 blade, 7-gauge welded construction	TURBO FORCE® Side Discharge, Recycler (optional) 2 blade, 10-gauge welded construction	TURBO FORCE Side Discharge, Recycler (optional) 3 blade, 10-gauge welded construction
BLADES	Deck 02710: (2) 5,2 mm Decks 02711& 020712 (3) 6,3mm	6,4 mm (0.25") heat-treated steel	6,4 mm (0.25") heat-treated steel
HEIGHT OF CUT/ADJUSTMENT	Rear Discharge: 25-108 mm (1" - 4.25") Flail: 12-140 mm (0.5" - 5.5")	38 - 114 mm (1.5" - 4.5")	38 - 114 mm (1.5" - 4.5")
GROUND SPEED	▶ Forward: 0 - 9,6 km/h; (0 - 6mph) Reverse: 0 - 3,2 km/h (0 - 2mph)	Forward: 0 to 11 km/h (0 - 7mph); Reverse: 0 to 4,8 km/h (0 - 3mph)	Forward: 0 - 11 km/h (0 - 7mph); Reverse: 0 - 4,8 km/h (0 - 3mph)
FUEL/CAPACITY	▶ Petrol / 19 L (5 gal)	Petrol / 19 L (5 gal)	Petrol / 19 L (5 gal)
SPINDLE BEARING	Maintenance Free	Maintenance Free	Maintenance Free
SPINDLE HOUSING	24 cm (9.5") Cast Iron	20,3 cm (8") Cast Aluminum	20,3 cm (8") Cast Aluminum
ADJUSTABLE DISCHARGE BAFFLE	-	Standard Tools Free	Standard Tools Free
RUBBER DISCHARGE CHUTE	-	Standard	Standard
DRIVE TYRES	Turf Master 40,5 x 19 - 20,5 cm (16" x 7.5" - 8")	48 x 15 - 20,5 cm (19" x 6" - 8")	51 x 24 - 20,5 cm (20" x 9.5" - 8")
CASTER TYRES	23 x 9 - 10 cm (9" x 3.5" - 4") Flat-Free; Semi-Pneumatic	25,4 x 9 - 10 cm (10" x 3.5" - 4") Smooth	28 x 10 - 12,5 cm (11" x 4" - 5") Smooth
WEIGHT	129 kg (284 lbs)	272 kg (600 lbs)	301 kg (664 lbs)
OPERATOR COMFORT	Comfortable Controls; Choice of Decks; Optional: Sulky	Comfortable Controls; Choice of Decks Optional: Sulky; Light Kit	
COMMERCIAL WARRANTY	2-Year	2-Year	

▶ = Enhanced or step-up feature

MODEL	74534TE	74540TE	74504TE	74542TE / 72542TE	GRANDSTAND® REVOLUTION NEW
CUTTING WIDTH	91 cm (36")	91 cm (36")	▶ 122 cm (48")	122 cm (48")	132 cm (52")
DEFLECTOR WIDTH	131 cm (52")	96 cm (38")	160 cm (63")	127 cm (50")	TBC
ENGINE / MOTOR	Kawasaki® FS541V, 603 cc	Kawasaki FS541V, 603 cc	Kawasaki FX691V, 726 cc	Kawasaki FX691V, 726 cc	Dana Mid-mount 120-60 Electric Transmission†
DECK TYPE	TURBO FORCE Side Discharge	TURBO FORCE Rear Discharge	TURBO FORCE Side Discharge	TURBO FORCE Rear Discharge	TURBO FORCE Side Discharge
DECK HEIGHT	127 mm (5")	127 mm (5")	140 mm (5.5")	140 mm (5.5")	140 mm (5.5")
HEIGHT OF CUT/ADJUSTMENT	25-127 mm (1" - 5")	25-127 mm (1" - 5")	38-127 mm (1.5" - 5")	38-127 mm (1.5" - 5")	38-127 mm (1.5" - 5")
GROUND SPEED	0 - 8 km/h (0 - 5 mph)	0 - 8 km/h (0 - 5 mph)	▶ 0-12 km/h (0 - 7.5 mph)	0-12 km/h (0 - 7.5 mph)	0-12 km/h (0 - 7.5 mph)
FUEL/CAPACITY	Petrol, 29,5 L (8 gal)	Petrol, 29,5 L (8 gal)	▶ Petrol, 38 L (10 gal)	Petrol, 38 L (10 gal)	HyperCell® Battery 18,4 kW 6 - 9+ hour run time
SPINDLE BEARINGS	Maintenance Free	Maintenance Free	Maintenance Free	Maintenance Free	Maintenance Free
ADJUSTABLE DISCHARGE BAFFLE	Standard, Tools Free	NA	Standard, Tools Free	NA	NA
HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	10 cc/rev pump	10 cc/rev pump	10 cc/rev pump	10 cc/rev pump	NA
DRIVE TYRES	Turf Master® 46 x 22 - 20 (18" x 8.5" - 8")	Turf Master 46 x 24 - 20 (18" x 9.5" - 8")	▶ Turf Master 51 x 25 - 20 (20" x 10" - 8")	Turf Master 51 x 25 - 20 (20" x 10" - 8")	51 cm x 27 cm - 30,5 cm (20" x 10.5" - 12") Black Steel Drive Wheels
CASTER TYRES	28 x 10 - 13 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 - 13 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 - 13 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 - 13 (11" x 4" - 5") Flat-free Semi-Pneumatic	28 x 10 - 13 (11" x 4" - 5") Flat-free Semi-Pneumatic
WEIGHT	343 kg (756 lbs)	352 kg (776 lbs)	407 kg (897 lbs)	415 kg (915 lbs)	TBC
OPERATOR COMFORT	Foldable Operator Platform with Fatigue-Reducing Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start.				
COMMERCIAL WARRANTY	5 Year, 1200 Hours	5 Year, 1200 Hours	5 Year, 1200 Hours	5 Year, 1200 Hours	5 Year, 1200 Hours

ZERO TURN MOWERS

COMPARE KEY FEATURES TO HELP FIND THE MOWERS THAT FIT YOUR APPLICATION.



Z MASTER® 2000 Series



Z MASTER 4000 Series



Z MASTER 6000 Series



Z MASTER 7000 Series

MODEL	74456TE HDX MyRIDE	77292TE HDX MyRIDE
CUTTING WIDTH	122 cm (48")	132 cm (52")
DEFLECTOR WIDTH	NA	170 cm (67")
ENGINE	Kawasaki® FX730V 726 cc 17,5kW (23.5 hp)	Kawasaki FX730V 726 cc 17,5kW (23.5 hp)
DECK TYPE	7/10-ga TURBO FORCE, Rear Discharge	7/10-ga TURBO FORCE, Side Discharge
DECK HEIGHT	12,7 cm (5")	12,7 cm (5")
HEIGHT OF CUT/ ADJUSTMENT	3,8-12,7 cm (1.5-5"), 0,64 cm (0.25") increments	3,8-12,7 cm (1.5-5"), 0,64 cm (0.25") increments
GROUND SPEED	0 - 13 km/h (0 - 8 mph)	0 - 11 km/h (0 - 7 mph)
FUEL/CAPACITY	Petrol 26,5 L (7 gal)	Petrol 26,5 L (7 gal)
SPINDLE ASSEMBLIES	20,3 cm (8") Cast Aluminum	20,3 cm (8") Cast Aluminum
ADJUSTABLE DISCHARGE BAFFLE	NA	Standard
HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	Hydro-gear ZT-2800 10cc/rev	Hydro-gear ZT-2800 10cc/rev
DRIVE TYRES	Hoosier Turf 56 x 24 - 30,5 cm (22" x 9.5"-12")	Hoosier Turf 56 x 24 - 30,5 cm (22" x 9.5"-12")
CASTER TYRES	33 x 16,5 - 15,2 cm (13" x 6.5" x 6") Black Pneumatic	33 x 16,5 - 15,2 cm (13" x 6.5" x 6") Black Pneumatic
WEIGHT	432 kg (953 lbs)	474 kg (1046 lbs)
OPERATOR COMFORT	MyRIDE Suspension System: Arm Rests; Digital Information Center & Fuel Gauge; Heavy Duty Steel Construction; Two-Position Folding ROPS; Beverage Holder; Storage Compartments; Foot Pedal Deck Lift Design	
COMMERCIAL WARRANTY *	4-Year/750 hours	

	74048TE Pro Base MyRIDE	74053TE HDX MyRIDE	74056TE HDX MyRIDE
CUTTING WIDTH	122 cm (48")	132 cm (52")	152 cm (60")
DEFLECTOR WIDTH	160 cm (63")	170 cm (67")	192 cm (76")
ENGINE	Kawasaki FX691V 726 cc 18,3 kW (24.5 hp)	Kawasaki FX801V 852 cc 23,1 kW (31 hp)	Kawasaki FX801V 852 cc 23,1 kW (31 hp)
DECK TYPE	7-ga TURBO FORCE, Side Discharge	7-ga TURBO FORCE, Side Discharge	7-ga TURBO FORCE, Side Discharge
DECK HEIGHT	14 cm (5.5")	14 cm (5.5")	14 cm (5.5")
HEIGHT OF CUT/ ADJUSTMENT	3,8-14 cm (1.5-5.5"), 0,64 cm (0.25") increments	3,8-14 cm (1.5-5.5"), 0,64 cm (0.25") increments	3,8-14 cm (1.5-5.5"), 0,64 cm (0.25") increments
GROUND SPEED	0 - 16 km/h (0 - 10 mph)	0 - 19 km/h (0 - 12 mph)	0 - 19 km/h (0 - 12 mph)
FUEL/CAPACITY	Petrol 37,8 L (10 gal)	Petrol 37,8 L (10 gal)	Petrol 37,8 L (10 gal)
SPINDLE ASSEMBLIES	22,9 cm (9") Cast Aluminum	22,9 cm (9") Cast Aluminum	22,9 cm (9") Cast Aluminum
ADJUSTABLE DISCHARGE BAFFLE	Standard	Standard	Standard
HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	Hydro-gear ZT-4400 12cc/rev	Hydro-gear ZT-4400 12cc/rev	Hydro-gear ZT-4400 12cc/rev
DRIVE TYRES	Super Turf 61 x 24 - 30,5 cm (24" x 9.5"-12")	Voodoo 66 x 26,7 - 30,5 cm (26" x 10.5"-12")	Voodoo 66 x 30,5 - 30,5 cm (26" x 12"-12")
CASTER TYRES	33 x 16,5 - 15,2 cm (13" x 6.5" x 6") Black Pneumatic	38 x 16,5 - 15,2 cm (15" x 6.5" x 6") Black Pneumatic	38 x 16,5 - 15,2 cm (15" x 6.5" x 6") Black Pneumatic
WEIGHT	517 kg (1140 lbs)	582 kg (1284 lbs)	543 kg (1197 lbs)
OPERATOR COMFORT	MyRIDE suspension system: Arm Rests; Heavy-Duty Canister Air Cleaner; Digital Information Center & Fuel Gauge; USB Port; Heavy Duty Steel Construction; Two-Position Folding ROPS; Beverage Holder; Storage Compartments; Mechanical and Electric Deck Lift Design		
COMMERCIAL WARRANTY *	5-Year/ 1250 hours	5-Year/ 1250 hours	5-Year/ 1250 hours

	72902TE	72969TE MyRIDE	72942TE
CUTTING WIDTH	122 cm (48")	132 cm (52")	152 cm (60")
DEFLECTOR WIDTH	160 cm (63")	170 cm (67")	N/A
ENGINE	Kawasaki FX651V, 726 cc, 15,3 kW (20.5 hp)	Kawasaki FX691V, 726 cc, 16,4 kW (22 hp)	Kawasaki FX801V, 852 cc, 19 kW (25.5 hp)
DECK TYPE	7-ga TURBO FORCE, Side Discharge	7-ga TURBO FORCE, Side Discharge	7-ga TURBO FORCE, Rear Discharge
DECK HEIGHT	14 cm (5.5")	14 cm (5.5")	14 cm (5.5")
HEIGHT OF CUT/ ADJUSTMENT	2,5-14 cm (1"-5.5")	2,5-14 cm (1"-5.5")	2,5-14 cm (1"-5.5")
GROUND SPEED	0-16 km/h (0-10 mph)	0-16 km/h (0-10 mph)	0-18,5 km/h (0-11.5 mph)
FUEL/CAPACITY	Petrol 45 L (12 gal)	Petrol 45 L (12 gal)	Petrol 45 L (12 gal)
SPINDLE ASSEMBLIES	22,9 cm (9") Cast Aluminum	22,9 cm (9") Cast Aluminum	22,9 cm (9") Cast Aluminum
ADJUSTABLE DISCHARGE BAFFLE	Standard, Tools Free	Standard, Tools Free	NA
HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	12 cc/rev pump	12 cc/rev pump	16 cc/rev pump
DRIVE TYRES	Turf Master® 61 x 24 - 30,5 cm (24" x 9.5" - 12")	Turf Master 61 x 24 - 30,5 cm (24" x 9.5" - 12")	Turf Master 61 x 30,5-30,5 cm (24" x 12" - 12")
CASTER TYRES	33 x 15 cm - 12,5 (13" x 5" - 6") Flat-Free Semi-Pneumatic	33 x 16,5 - 15 cm (13" x 6,5" - 6") Flat-Free Semi-Pneumatic	Multi Trac 33 x 16,5 - 15cm (13" x 6,5" - 6") Flat-Free Semi-Pneumatic
WEIGHT	501 kg (1105 lbs)	547 kg (1207 lbs)	582 kg (1282 lbs)
OPERATOR COMFORT	3-D Isolation Seat: Arm Rests; MyRIDE suspension system (72969TE); Heavy-Duty Canister Air Cleaner; Digital Information Center & Fuel Gauge; Heavy Duty Steel Construction; Two-Position Folding ROPS; Beverage Holder; Storage Compartments; Foot Pedal Deck Lift Design; Toro Z Stand.		
COMMERCIAL WARRANTY *	5-Year/1400 hours		

	74279TE	74264TE	74265TE
CUTTING WIDTH	132 cm (52")	132 cm (52")	152 cm (60")
DEFLECTOR WIDTH	170 cm (67")	170 cm (67")	193 cm (76")
ENGINE	Kubota®, 898 cc Diesel 16,6kW (23 hp)	Kubota, 898 cc Diesel 16,6kW (23 hp)	Kubota, 898 cc Diesel 16,6kW (23 hp)
DECK TYPE	7-ga TURBO FORCE, Rear Discharge	7-ga TURBO FORCE, Side Discharge	7-ga TURBO FORCE, Side Discharge
DECK HEIGHT	14 cm (5.5")	14 cm (5.5")	14 cm (5.5")
HEIGHT OF CUT/ ADJUSTMENT	3,8-12,7 cm (1.5"-5")	3,8-12,7 cm (1.5"-5")	3,8-12,7 cm (1.5"-5")
GROUND SPEED	0-18 km/h (0-11 mph)	0-18 km/h (0-11 mph)	0-18 km/h (0-11 mph)
FUEL/CAPACITY	Petrol 45 L (12 gal)	Petrol 45 L (12 gal)	Petrol 45 L (12 gal)
SPINDLE ASSEMBLIES	22,9 cm (9") Cast Aluminum	22,9 cm (9") Cast Aluminum	22,9 cm (9") Cast Aluminum
ADJUSTABLE DISCHARGE BAFFLE	NA	Standard, Tools Free	Standard, Tools Free
HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	16 cc/rev pump	16 cc/rev pump	16 cc/rev pump
DRIVE TYRES	Turf Master 4-ply 58 x 24 - 30,5 cm (23" x 9.5" - 12")	Turf Master 4-ply 58 x 24 - 30,5 cm (23" x 9.5" - 12")	Turf Master 4-ply 61 x 30 - 30,5 cm (24" x 11.5" - 12")
CASTER TYRES	33 x 15 - 16,5 cm (13" x 6" - 6,5") Flat-Free Semi-Pneumatic	33 x 15 - 16,5 cm (13" x 6" - 6,5") Flat-Free Semi-Pneumatic	33 x 15 - 16,5 cm (13" x 6" - 6,5") Flat-Free Semi-Pneumatic
WEIGHT	733 kg (1616 lbs)	733 kg (1616 lbs)	722 kg (1592 lbs)
OPERATOR COMFORT	Deluxe Suspension Seat With Armrest; Drive System: Tandem Hydraulic Pumps; 2 Wheel Motors; Heavy Duty Electromagnetic Clutch; Toro Z Stand; Hour Meter Optional: DFS Collection & Recycler Kit		
COMMERCIAL WARRANTY *	5-Year/1200 hours		

* Refer to Operator's Manual for further details.

➤ = Enhanced or step-up feature

ZERO TURN MOWERS CONTINUED

COMPARE KEY FEATURES TO HELP FIND THE MOWERS THAT FIT YOUR APPLICATION.



74072TE
US Model Shown



74311TE

Z MASTER®
7500-D Series w/ Horizon™ Technology

Z MASTER
8000 Series

MODEL	72028	72029	72065	72074	74311TE
CUTTING WIDTH	152 cm (60")	183 cm (72")	152 cm (60")	183 cm (72")	122 cm (48")
DEFLECTOR WIDTH	NA	NA	NA	NA	NA
ENGINE	18,6 kW (25 hp) Yanmar® Diesel 1267 cc	8,6 kW (25 hp) Yanmar® Diesel 1267 cc	27,6 kW (37 hp) Yanmar Diesel 1642 cc	27,6 kW (37 hp) Yanmar Diesel 1642 cc	Kohler Command Pro 624 cc
DECK TYPE	7-Gauge TURBO FORCE® Rear Discharge	7-Gauge TURBO FORCE Rear Discharge	7-Gauge TURBO FORCE Rear Discharge	7-Gauge TURBO FORCE Rear Discharge	Commercial Rear Discharge
DECK HEIGHT	14 cm (5.5")	14 cm (5.5")	14 cm (5.5")	14 cm (5.5")	▶18,8 cm (7.5")
HEIGHT OF CUT/ ADJUSTMENT	2,5 – 14,0 cm (1.0" – 5.5")	2,5 – 14,0 cm (1.0" – 5.5")	2,5 – 14,0 cm (1.0" – 5.5")	2,5 – 14,0 cm (1.0" – 5.5")	2,5 – 10 cm (1" – 4")
GROUND SPEED	0-20,1 km/h (0-12.5 mph)	0-20,1 km/h (0-12.5 mph)	0-20,1 km/h (0-12.5 mph)	0-20,1 km/h (0-12.5 mph)	0-11 km/h (0-7 mph)
FUEL/CAPACITY	Diesel 47,3 L (12.5-gal)	Diesel 47,3 L (12.5-gal)	Diesel 47,3 L (12.5-gal)	Diesel 47,3 L (12.5-gal)	Petrol 28 L (7.5 gal)
SPINDLE BEARINGS	Cast Aluminum, Maintenance-Free	Cast Aluminum, Maintenance-Free	Cast Aluminum, Maintenance-Free	Cast Aluminum, Maintenance-Free	Cast Iron
ADJUSTABLE DISCHARGE BAFFLE	NA	NA	NA	NA	▶Fill reduction baffles standard
HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	18 cc/rev pump	18 cc/rev pump	18 cc/rev pump	18 cc/rev pump	12 cc/rev pump
DRIVE TYRES	66,0 x 30,5 x 30,5 cm (26" x 12" – 12")	66,0 x 30,5 x 30,5 cm (26" x 12" – 12")	66,0 x 30,5 x 30,5 cm (26" x 12" – 12")	66,0 x 30,5 x 30,5 cm (26" x 12" – 12")	Multi-trac 45,5 x 26,5 – 25,5 cm (18" x 10.5" -10")
CASTER TYRES	38,1 x 15,2 x 15,2 cm (15" x 6" – 6") Flat-Free Semi-Pneumatic	38,1 x 15,2 x 15,2 cm (15" x 6" – 6") Flat-Free Semi-Pneumatic	38,1 x 15,2 x 15,2 cm (15" x 6" – 6") Flat-Free Semi-Pneumatic	38,1 x 15,2 x 15,2 cm (15" x 6" – 6") Flat-Free Semi-Pneumatic	20 x 7,5 - 10 cm (8" x 3" – 4") Semi Pneumatic
WEIGHT	887,7 kg (1957 lbs.)	890,9 kg (1964 lbs.)	969 kg (2136 lbs.)	972 kg (2143 lbs.)	544 kg (1199 lbs)
OPERATOR COMFORT	Deluxe suspension operator seat; Seat Suspension System; Arm rests; Folding ROPS; Storage Compartment; Flip-up Iso-mount Floor Pan				High Capacity 335 L Hopper; Out Front Deck Design; Ability to Bag, Mulch or Both. Optional: ROPS Kit; Sunshade
CE KIT REQUIRED	144-0378	144-0410	144-0378	144-0410	
COMMERCIAL WARRANTY	5-Year or 1200 hours				2-Year or 1200 hours

* Refer to Operator's Manual for further details.

TURF RENOVATION EQUIPMENT

COMPARE KEY FEATURES TO HELP FIND THE MOWERS THAT FIT YOUR APPLICATION.



Hydraulic Seeder
23512



Stand-On
Aerator
29516



Power Broom
38700



BRC-28 Brush Cutter
23522

	HYDRAULIC SEEDER	STAND-ON AERATOR*	POWER BROOM	BRC-28 BRUSH CUTTER
MODEL	23508	29516	38700	23522
ENGINE	Kohler® Command PRO® CH395	Kohler® CH440	Kohler Command Pro Multi-Season	Toro 10.8 kW (14.5 hp), Electric Start
FUEL CAPACITY	6 L (1.5 gal)	7 L (1.85 gal)	4 L (1 gal)	4 L (1 gal)
WORKING / CUTTING WIDTH	51 cm (20")	61 cm (24")	91 cm (36")	-
CUTTING WIDTH	-	-	-	71 cm (28")
CUTTING HEIGHT	-	-	-	9,5 cm (3.75")
DEPTH	Up to 2,5 cm (1")	Up to 12,7 cm (5")	-	-
WIDTH	76 cm (30")	90 cm (35.5")	118 cm (46.5")	76 cm (30")
HEIGHT	71 cm (28") (handle folded) 114 cm (45") (handle working)	130 cm (51")	105,5 cm (41.5")	106,5 cm (42")
LENGTH	96,5 cm (38") (handle folded) 137 cm (54") (handle working)	174 cm (68.6")	185 cm (73")	226 cm (89")
WEIGHT	122 kg (270 lbs)	388 kg (856 lbs)	159 kg (350 lbs)	170 kg (375 lbs)
GROUND SPEED	Up to 4,5 km/h (3 mph) fwd Up to 3,5 km/h (2 mph) rev	Up to 11 km/h (7 mph) fwd Up to 3,5 km/h (2 mph) rev	Up to 9,5 km/h (6 mph) fwd, Up to 3,0 km/h (2 mph) rev	Up to 5,5 km/h (3.4 mph) fwd Up to 3,2 km/h (2 mph) rev
ELECTRIC START	-	-	-	Standard
SPINDLE DIAMETER	-	-	-	6 cm (2.5")
TRANSAXLE	-	-	-	Hydro-Gear T2
HOPPER/TANK CAPACITY	18 kg (40 lbs)	-	-	
TINES/BLADES/ BROOM	10 verticutting blades	36 tines	18 broom wafers	Standard flail blade with 2 flails. Optional straight blade.
CE KIT REQUIRED	-	135-7423	-	-
COMMERCIAL WARRANTY	1-Year unit coverage, 2-Year engine coverage through manufacturer			

EXPERIENCE THE TORO® DIFFERENCE, ONLY AT YOUR LOCAL TORO DEALER.

GENUINE TORO® PARTS & SERVICE

INSIST ON GENUINE TORO® PARTS

To best protect your investment and maintain optimal performance of your turf equipment, count on Toro genuine parts. When it comes to reliability, Toro delivers replacement parts designed to the exact engineering specifications of our equipment.

When you buy a Toro, you get the total Toro treatment. Your Toro dealer knows how to treat you right. They roll out the red carpet every day to provide you with exceptional customer service, competitive pricing, special financing options and more.

For peace of mind, insist on Toro genuine parts. Visit your independent dealer for products that cover your needs year-round, or go to toro.com



RESPONSIVE TORO DEALERS

Toro dealers have the skills, training and commitment to keep your equipment performing its best. Leveraging their extensive inventory and Toro's industry-leading 98% fill rate on parts, your Toro dealer leads the market in parts availability.



CUSTOMER CARE

Toro has an extensive network of factory trained professional dealers in place to ensure you have the parts and service support needed to keep your Toro product running at peak performance. Visit Toro.com to find your nearest Dealer

CLICK WWW.TORO.COM

Find immediate answers to frequently asked questions and other helpful information, including a dealer locator, parts lookup, product registration, downloadable owner's manuals, safety information, special financing offers and interactive product manuals.

VISIT YOUR LOCAL TORO DEALER

Count on our national network of factory-authorized dealers for genuine Toro parts and service support. Toro professional equipment dealers regularly undergo extensive technical training to stay knowledgeable about the servicing and operation of new products.

TORO® TOTAL COVERAGE GUARANTEE

Toro stands behind its equipment with comprehensive warranty coverage (see your Toro dealer for complete details).

- Five-year or 1,200-hour¹ limited warranty on GrandStand® and most Z Master® mowers (four-year or 400-hour¹ limited warranty on other Z Master models), with a two-year commercial engine warranty² and a limited lifetime frame warranty³
- Two-year limited warranty² on mid-size walk-behind mowers
- One-year limited commercial warranty on 53 cm professional walk-behind mowers (2-year limited engine warranty on 53 cm Heavy-Duty models)
- One-year limited warranty on batteries and attachments

HIGH-PERFORMANCE HYDRO OIL

Toro offers high-performance hydraulic oil specially formulated to maximize our commercial mowers' performance. Compared to other hydraulic oils, Toro HYPR-OIL 500™ offers greater thermal stability, higher shear resistance, and excellent wear protection — all at a similar price. The unique formulation also doubles the service interval to 500 hours on 2009 and later model year equipment, including Z Master® G3 and GrandStand® mowers.

MVP BLADE AND BELT PACKS

Stock up and save with specially priced Toro MVP (Maintenance, Value and Performance) Blade and Belt Packs for most gasoline-powered Toro Z Master® models. Each pack contains a supply of commonly replaced maintenance parts, including three standard blades, one hydraulic oil filter, one deck drive belt and one traction or pump drive belt.

WHY CHOOSE TORO BLADES AND BELTS?

Made specifically for Toro mowers, Toro belts are manufactured to tight tolerances to provide optimum fit, minimize slippage and ensure dependable performance. Toro blades are crafted from heat-treated alloy steel to resist flexing and abrasive wear, as well as to provide a crisp, clean cut.

TESTING



PERFORMANCE EVALUATIONS FOR THE PROS, BY THE PROS

Each new Toro product is subjected to extensive high-tech testing at Toro's corporate headquarters, as well as coast-to-coast field evaluations in various types of turf and environmental conditions. Even after all of this testing, we still place product samples in the field with landscape professionals to ensure the equipment performs as intended.

SAFETY



SAFE PRODUCTS DESIGNED TO PROVIDE PEACE OF MIND

Toro has a longstanding reputation for designing safe products. Just one example: All Toro Z Master® zero-turn riders are equipped with a folding roll-over protection system as a standard feature. All Toro LCE products are CE compliant.



SAFETY EDUCATION FOR YOU AND YOUR EMPLOYEES

At Toro, we produce our mowers with safety in mind and test against rigorous safety standards, but it doesn't stop there. We offer many tools to help train and protect you and your operators — and help safeguard your business. From on-line interactive, multi-lingual manuals and safety quizzes to product safety and training. Please visit the product safety information page on toro.com for more information.

¹ Whichever occurs first.

² Some engines used on Toro LCE Products are warranted by the engine manufacturer.

³ Original owner only. Lifetime Frame Warranty — If the main frame, consisting of the parts welded together to form the tractor structure that other components such as the engine are secured to, cracks or breaks in normal use, it will be repaired or replaced under warranty at no cost for parts and labor. Frame failure due to misuse or abuse and failure or repair required due to rust or corrosion are not covered.

KEEP YOUR TORO® MOWER RUNNING IN TOP CONDITION

GENUINE TORO® PARTS FOR ZERO TURN MOWERS

DON'T FORGET THE MUST HAVES!



TORO PREMIUM FUEL TREATMENT

12 oz bottle – 131-6572



ALL-PURPOSE GREASE

Premium all-purpose grease:
14 oz – 108-1190
Synthetic grease:
3 oz – 125-3511; 4 oz – 136-8595



MOWER LIFT ASSIST

Gain access to the underside of your zero-turn mower's deck with no hassle thanks to its comfortable and ergonomic design.
Mount kit – 140-2711
Jack kit – 127-6666



LIGHT KIT

Connecting to the existing accessory circuit, this quick install light kit keeps your productivity into the night.



MICHELIN® X TWEEL TURF TYRES

No maintenance, no compromise, no downtime. The new turf tweel tires are designed to eliminate flat tires in any conditions and improve the operator's comfort.



EAR PROTECTION

Ear protection, no radio – 131-3828
Ear protection, with radio – 131-3829



T-150 LUBRICANT SPRAY

8 oz bottle – 29100



DELUXE RIDER COVER

Heavy-duty waterproof cover is abrasion- and tear-resistant. Vented design helps reduce heat and moisture buildup.
Deluxe Rider Cover for all Z-Masters – 490-7319



SUN SHADE

Fabric shade for 2-post ROPS made of heavy-duty, water-repellent material for maximum durability. Shields the operator from the elements while mowing.



5-GALLON BUCKET

Easily attach a 5-gallon bucket to the mower to carry tools or pick up unwanted debris standing on your way while mowing. 5-Gallon bucket – 133-2533 | Bucket mount kit – 140-2066



PREMIUM TIRE SEALANT

Tire sealant, 32 oz – 110-8832



TORO PAINT

Help your customers take care of their mower with our range of Toro paint.

PART #	TORO TOUCH-UP PAINT
361-10	Toro Red Spray Paint, 12 oz Bottle
361-10	Toro New Red Spray Paint 1 Gallon
361-9	Toro Semi-Gloss Black Spray Paint, 12 oz Bottle
361-12	Dark Metallic Gray Spray Paint
361-1	Apple Red Spray Paint, 12 oz Bottle
107-0392	Protection-Terminal, Aerosol, 14 oz
112-0176	Black Paint Bottle, 0.6 oz
112-0177	Red Paint Pen
112-0178	Red Paint Bottle, 0.6 oz

PART #	DESCRIPTION
107-9880	Light Kit – 7000 Series and Z100-Z500
116-1154	Light Kit – 6000 Series
144-1992	LED Light Kit – 2000 Series
130-8469	Light Kit – 8000 Series Direct Collect Z

PART #	DESCRIPTION
60,7 CM (24") TWEEL	
139-3649	56 mm/2.20" Offset – Z Master® 2000 Series
139-7891	19 mm/0.75" Offset – Z Master 4000/6000/7000 Series
45,7 CM (18") TWEEL	
139-7890	13 mm/0.50" Offset – GrandStand® models 72504TE and 72542TE

PART #	DESCRIPTION
115-4510	Sunshade – All Z-Masters with ROPs
144-3719	Hardtop Sunshade

TORO DELIVERS REPLACEMENT PARTS THAT WILL FIT.

GENUINE TORO® PARTS FOR STAND-ON MOWERS

THE MUST HAVES!



TORO PREMIUM FUEL TREATMENT

12 oz bottle – 131-6572



RUBBISH BAG KIT

This easy to install Toro Lawn Mower Trash Bag and Cup Holder Kit fits on Grandstand Mowers 121-7530 and 133-1435



LIGHT KIT

Lights easily mount to the mower frame, and wiring quickly connects to the existing accessory circuit.

PART #	DESCRIPTION
114-3505	Light Kit – 91 cm and 102 cm Grandstands
133-1437	Light Kit – 122 cm Grandstands (2016 and newer)
133-1495	Strobe Kit – 122 cm Grandstands (2016 and newer)



ENGINE OIL

Maximize the performance of your Toro lawn mower with Toro engine oil, specifically formulated for best results.



SOFT TWIN BAGGER KIT

The side-mounted bagger has a large 0,28 m³ (10 cu.ft.) capacity. The vertically-mounted blower allows maneuverability and maximum visibility.



MICHELIN® X TWEEL TURF TYRES

No maintenance, no compromise, no downtime. The new turf tweel tires are designed to eliminate flat tires in any conditions and improve the operator's comfort. 45,7 cm (18") Tweel. 13 mm/0.50" Offset fits GrandStand® – 139-7890



TORO PAINT

Help your customers take care of their mower with our range of Toro paint.



5-GALLON BUCKET

Easily attach a 5-gallon bucket to the mower to carry tools or pick up unwanted debris. 133-2533



STRIPING KIT

Creates vivid stripes for a premium "ball park" after-cut appearance.

PART #	DESCRIPTION
117-8560	Striping Kit – 36" (91.4 cm) and 40" (101.6 cm) GrandStand®
133-1436	Striping Kit – 48" (121.9 cm), 52" (132.1 cm) & 60" (152.4 cm) GrandStand (2016 models)

POWER AND SIMPLICITY SAVE YOU TIME

GENUINE TORO® PARTS FOR SITEWORKS

THE MUST HAVES!



GRINDER TOOTH KITS

Grinder tooth are fast-moving wear items with high competitiveness on the market. Choosing Toro Genuine Tooth means opting for quality and performance. As a Toro Channel Partner, you can count on our 3-pack, 6-pack and 12-pack grinder tooth kits to get everything you need in one box.



50H/200H FILTER KITS

Available for a range of Dingo, TRX Trenchers and Stump Grinder models, our 50 hours and 200 hours filter kits will get you covered.



EAR PROTECTION

Ear protection, no radio – 131-3828
Ear protection, with radio – 131-3829



T-150 LUBRICANT SPRAY

8 oz bottle – 29100



TORO PAINT

Help your customers take care of their mower with our range of Toro paint.

Toro TRX walk-behind trenchers are now more efficient and powerful than ever. We've improved our lineup with three new models that combine the groundbreaking maneuverability the TRX walk-behind trencher is known for with even better performance and serviceability.

New design enhancements make these models easier to operate, thanks to improved hydraulics and streamlined controls. Intelli-Trench™ technology automatically adjusts the hydraulic flow — putting power where you need it so you can maximize productivity. Plus, with significantly fewer parts, the newer models require less maintenance.



REAL PEOPLE MEANS REAL SUPPORT

Toro authorized service partners are locally operated and ready to support your business with product expert advice, after-sale service and extensive range of Genuine Toro Parts and Accessories.



PERSONAL SERVICE

At the counter or on the phone, you're more than a customer - you're a neighbor. Your business matters and they will work hard to earn it.



UNBEATABLE SELECTION

Toro service partners locally stock the largest selection of Genuine Toro Parts and have the support of Toro Parts network; ensuring availability of right parts when you need them.



AFTER-SALE GUARANTEE

Just like a car, power equipment requires scheduled service to keep it running and performing at peak levels. Contact your local Toro service partner today to discuss your Toro service requirements.

TOP 10 REASONS

TO BUY FROM A TORO® SERVICE PARTNER

10. Extensive product range and competitive prices
9. Access to Toro finance options*
8. On-site delivery & customer training*
7. Toro Protection Plus - extended warranty offer
6. Special price on Internet of Turf™ subscriptions
5. Customers loyalty programs*
4. Toro authorized service personnel
3. Genuine Toro parts & accessories
2. Experience, knowledgeable and courteous staff

And the #1 Reason ...

1. Locally owned and operated



toro.com

© 2022 The Toro Company. All rights reserved.

*Suggestions only. Contact your local Service Partner for more information. Subject to availability and participating Service Partners.



TORO PROTECTION PLUS™

EXTENDED PROTECTION PLAN

Run Your Maintenance Budget at Peak Efficiency

The Toro Protection Plus™ (TPP) Extended Protection Plan eliminates the hit your maintenance budget can take when the unforeseen happens. Coverage is available for new equipment, pre-owned equipment, and most Toro attachments and accessories. Just choose the plan that fits your needs.

\$0 deductible for parts & labor on covered repairs | Remaining coverage is transferrable if ownership changes



toro.com/tpp

FROM
START
TO
FINISH



Count on it.



facebook.com/ToroCompany
twitter.com/TheToroCompany
youtube.com/ToroCompanyEurope



WHEN WE SAY **COUNT ON IT**, WE MEAN IT

Every product that carries the Toro brand is backed by over 100 years of history, innovation and timeless dependability. We never stop investing in research and development to give our customers the latest features. That's why Toro is one of the best-known, most trusted brands in the business — and why your next professional landscape equipment purchase should be a Toro. We also stand behind our products with a worldwide network of knowledgeable dealers for parts and service support.

Real People. Real Support.

Smart Features. Proven Dependability.



Count on it.



toro.com

Worldwide Headquarters
The Toro Company
8111 Lyndale Ave. So.
Bloomington, MN 55420 U.S.A.
Phone: (1) 952 888 8801
Fax: (1) 952 887 8258

©2022 The Toro Company.
All Rights Reserved.

22-601-GB master

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your distributor for details on all our warranties.



facebook.com
twitter.com/TheToroCompany
youtube.com/ToroCompanyEurope

