

# TURF RENOVATION

SPRAYMASTER®


**NEW**

Uneven applications cost you valuable time and money, not to mention unhappy clients. Eliminate the need for a manual pressure regulator and get precise liquid and granular spreads with Toro's Dual Smart Hour Meters on the lean-to-steer model. Check your fluid levels with just a glance with new white tanks. SprayMaster is designed to work seamlessly on any sized property.



**TORO**®

	LEAN-TO-STEER SPREADER/SPRAYER <b>NEW</b> 34230	SPRAYMASTER 36" 34231	SPRAYMASTER INTERMEDIATE 34233	SPRAYMASTER MAX 34235	SPRAYMASTER MAX XL 34237
<b>POWER AND DRIVE SYSTEM</b>					
Engine*	Kohler® 9.5 hp	▶ Vanguard Commercial 16 hp	Vanguard Commercial 16 hp	Vanguard Commercial 16 hp	Vanguard Commercial 16 hp
Engine Orientation	Horizontal	Vertical	Horizontal	Horizontal	Horizontal
Fuel Capacity	Gas/1.85 Gal (7 L)	▶ Gas/5.0 Gal (18.9 L)	Gas/5.0 Gal (18.9 L)	Gas/5.0 Gal (18.9 L)	Gas/5.0 Gal (18.9 L)
Electric Start	Yes	Yes	Yes	Yes	Yes
Transmission	Hydrostatic	▶ Pump and Wheel Motor	Pump and Wheel Motor	Pump and Wheel Motor	Pump and Wheel Motor
Maximum Forward Speed	5.5 mph	▶ 7 mph	▶ 8 mph	8 mph	8 mph
<b>SPREADER SYSTEM</b>					
Hopper Size	175 lbs	120 lbs	▶ 220 lbs	220 lbs	220 lbs
Fertilizer Capacity	225 lbs	220 lbs	▶ 320 lbs	320 lbs	320 lbs
Spread Width	Adjustable from 4'-22'	Adjustable from 3'-25'	Adjustable from 3'-25'	Adjustable from 3'-25'	Adjustable from 3'-25'
Deflector Shield	Molded Plastic	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Spinner Motor	Electric	Hydraulic	Hydraulic	Hydraulic	Hydraulic
<b>SPRAY SYSTEM</b>					
Pump Capacity	5 GPM	5 GPM	5 GPM	5 GPM	7 GPM
Spray Capacity	20 Gal	▶ 24 Gal (2-12-Gal Tanks)	▶ 30 Gal (2-15 Gal Tanks)	▶ 60 Gal (2-30 Gal Tanks)	60 Gal (2-30-Gal Tanks)
Spray Width	4 ft or 10 ft	2 ft, 4 ft, 6 ft, or 8 ft	2 ft, 4 ft, 6 ft, or 8 ft	2 ft, 6 ft, 8 ft, or 10 ft	2 ft, 6 ft, 8 ft, or 10 ft
Three Section Breakaway Boom	N/A	▶ Standard with 4 Spray nozzles	Standard with 4 Spray nozzles	Standard with 5 Spray nozzles	Standard with 5 Spray nozzles
Spot Spray Hose	15 ft Coil Hose	15 ft Coil Hose	75 ft Hose Reel	75 ft Hose Reel	75 ft Hose Reel
<b>WEIGHTS AND MEASUREMENTS</b>					
Weight	500 lbs. (226.8 kg)	725 lbs. (328.9 kg)	920 lbs. (417.3 kg)	992 lbs. (450.0 kg)	995 lbs. (451.3 kg)
Height	51.5" (130.8 cm)	50" (127.0 cm)	50" (127.0 cm)	50" (127.0 cm)	50" (127.0 cm)
Width	35.5" (90.2 cm)	35.5" (90.2 cm)	46" (116.8 cm)	52" (132.1 cm)	52" (132.1 cm)
Length	67.5" (171.5 cm)	73" (185.4 cm)	73" (185.4 cm)	73" (185.4 cm)	73" (185.4 cm)

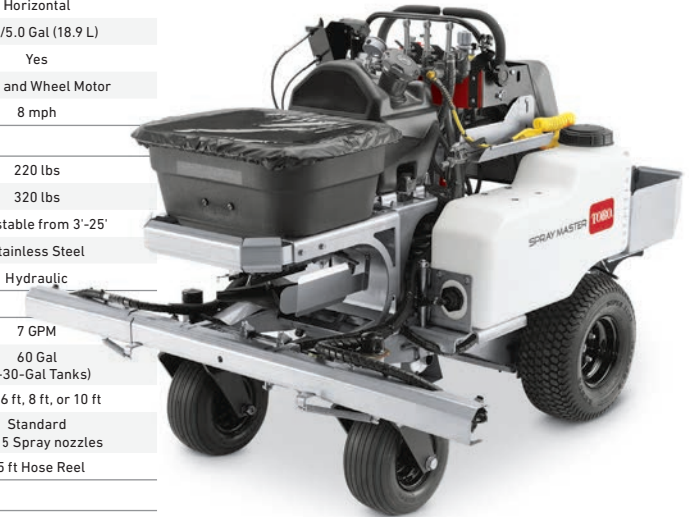

\*The gross horsepower of these gasoline engines was laboratory rated at 3600 rpm by the engine manufacturer in accordance with SAE J1940 or SAE J1995. As configured to meet safety, emission and operating requirements, the actual engine horsepower on these mowers will be significantly lower.

MAXIMUM OF  
**4.0 Acres**  
COVERED PER HOUR



#### EASY FLUID CHECK.

Check your fluid levels with just a glance with new white tanks.



#### CLOG-FREE FLOW.

Enjoy clog-free, consistent liquid flows with an auxiliary pump that delivers 2 gal./min. and up to 10 PSI.



#### SIMPLIFIED STEERING.

Make adjustments on the fly with one hand with control forward/reverse and left/right steering.