
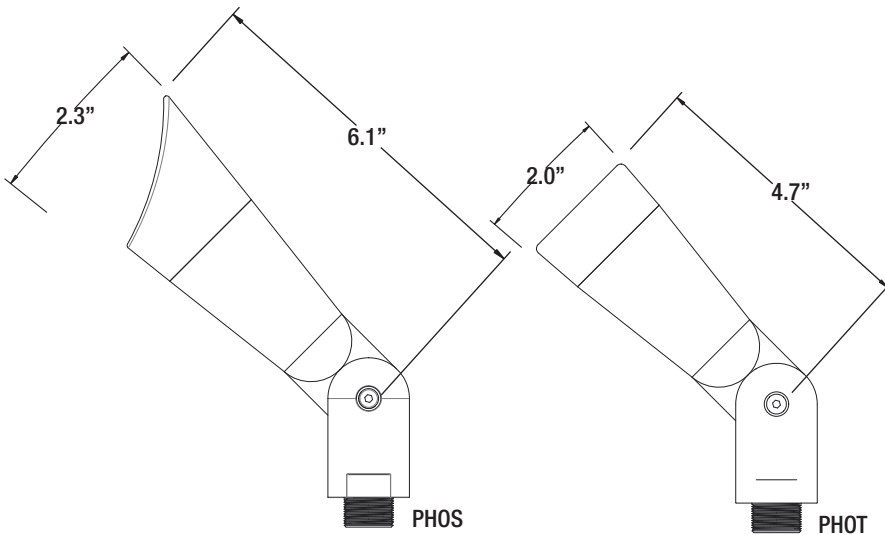


PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #:	
LAMP(S):	
NOTES:	




Specifications:

- Marine grade A360 alloy construction
- High temperature silicone o-rings
- 1' FLEX™ Auxiliary wire lead
- 15' direct burial cable
- AMC - Anti-Moisture Connections
- Available in shrouded and non-shrouded version
- 2W max. LED lamp / 20W max. halogen
- Bronze finish
- E-Shield™ coating process
- Composite stake with brass threaded insert
- Limited 10 year warranty


Light Distribution Cones:

LED-2W-M127K-12

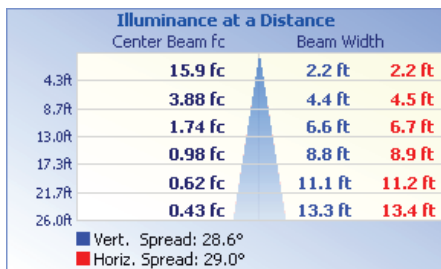

UL 2108:2004 R12.07
CSA C22.2.9.0-96 (R2006)

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.



Fixtures

Part Number

PHOS-NL-BK
PHOS-NL-BZ
PHOS-NL-TT
PHOS-L227-BK
PHOS-L227-BZ
PHOS-L227-TT
PHOT-NL-BK
PHOT-NL-BZ
PHOT-NL-TT
PHOT-L227-BK
PHOT-L227-BZ
PHOT-L227-TT

Description

PHOTON, SHROUD, ALLOY, NL, BK
PHOTON, SHROUD, ALLOY, NL, BZ
PHOTON, SHROUD, ALLOY, NL, TT
PHOTON, SHROUD, ALLOY, LED227K, BK
PHOTON, SHROUD, ALLOY, LED227K, BZ
PHOTON, SHROUD, ALLOY, LED227K, TT
PHOTON, ALLOY, NL, BK
PHOTON, ALLOY, NL, BZ
PHOTON, ALLOY, NL, TT
PHOTON, ALLOY, LED227K, BK
PHOTON, ALLOY, LED227K, BZ
PHOTON, ALLOY, LED227K, TT

Accessories

Part Number

PART-BZ

Description

Particle Dome Mounting Base

Finishes

Standard Finish

BZ - Bronze
BK - Black
TT - Tucson Tan