




VIVID Range Extender

PROJECT:	
TYPE:	
CATALOG NUMBER:	
LAMP(S):	
NOTES:	

Dimensions:

All dimensions in in. (top) and mm. (bottom)

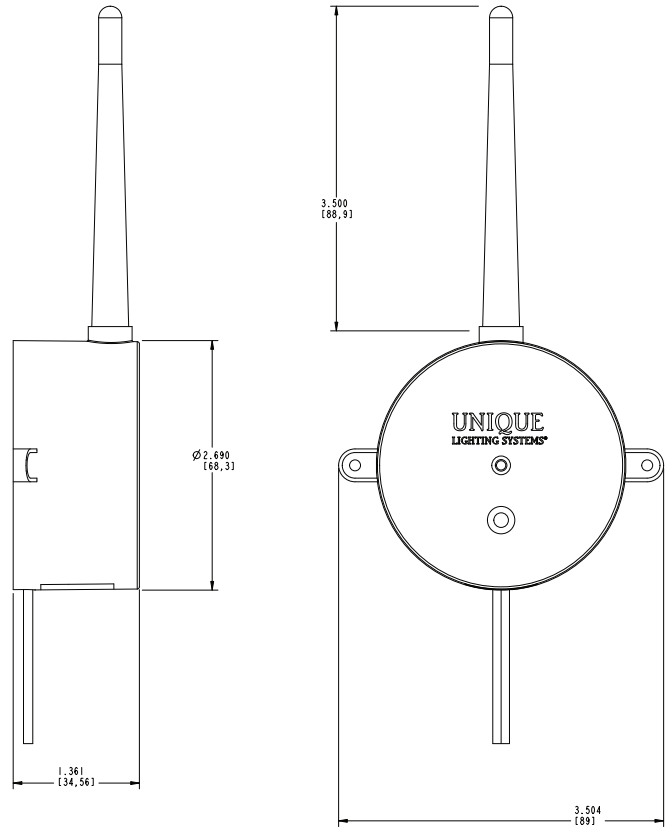

Type: Range extender

Input Voltage: 10-15VAC/DC

Control: Wireless data transmission, app controlled

Operating Frequency: 2402MHz x 2480MHz

Transmission Range: 164-230 feet

Housing: Polycarbonate

Wire: 10', 18 AWG SPT-2W

Usage: For use with **FLEX GOLD™ VIVID** lamps ONLY

MODEL NUMBER

VIVID-R

TECHNICAL INFORMATION

- IP65 Rated
- 1Mbps LE Enhancement FIPD Version Data Rate
- +20 dBm RF Output Power
- BM026P Module Chip Antenna
- -0 - 45°C, 5-80% RH Operating Environment

FLEX GOLD™ VIVID app available on:



* Android™ and the Android™ logo are trademarks or registered trademarks of Google Inc.

* iOS® is a trademark or registered trademark of Cisco in the U.S. and other countries.