



## PRODUCT SPECIFICATIONS

<b>PROJECT:</b>	
<b>MODEL #:</b>	
<b>LAMP(S):</b>	
<b>NOTES:</b>	

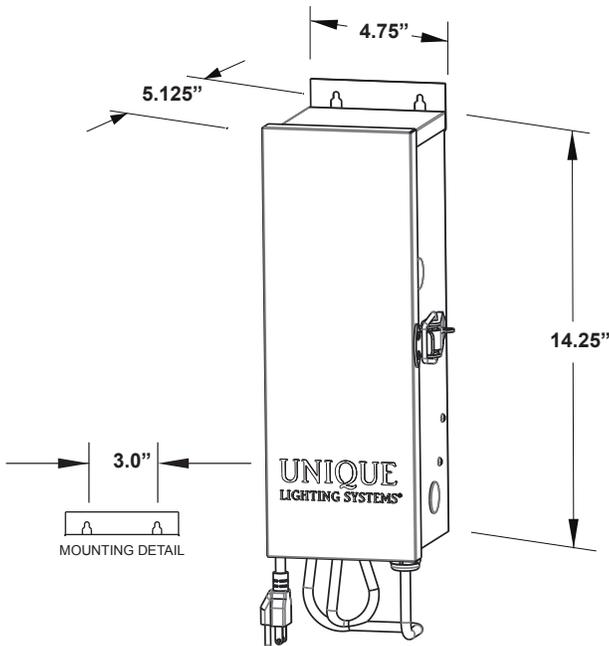

**Standard Finish**  
SS - Stainless Steel

Tinned 6061-T6 aluminum  
lug with 3mm set screws



## Specifications:

### Core

Engineered single core design with precision grain-oriented steel laminations. High temperature glass-impregnated nylon bobbin and solid copper mag wire. To ensure robust construction each output tap is welded to the mag wire for optimum connectivity.

### Construction

304 stainless steel (complies with NEMA 3R).

### Secondary Protection

LED safe 15 AMP breaker on 150W.  
LED safe 25 AMP breaker on 300W.

### Power Cord

16/3 SJTW power cord. Six feet in length.

### Electrical Requirements

Available power ratings 150 Watts and 300 Watts. Primary voltage is 120 volts, secondary voltage varies from 12V-15V output.

### Output Terminal

Tinned 6061-T6 aluminum lug strip with 3mm hex set screw for a positive torque connection. Includes 3mm hex key tool with every lugged transformer.

### Finish

Stainless Steel standard finish.

### Warranty

10 year limited warranty against manufacturer's defects.