
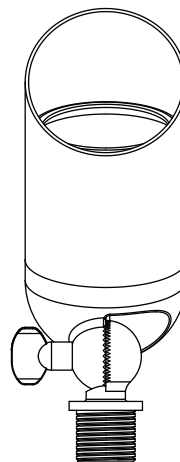
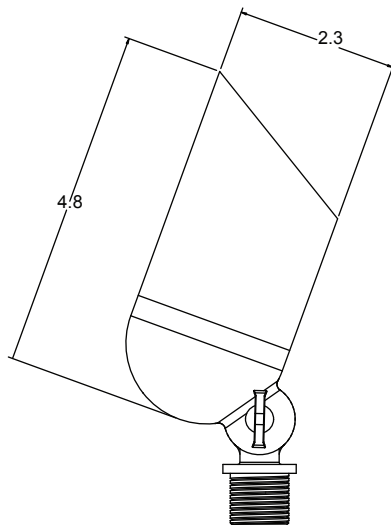


PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #:	
LAMP(S):	
NOTES:	



Specifications:

- Die-cast brass construction
- High temperature silicone o-rings
- 1' FLEX™ Auxiliary wire lead
- 15' direct burial cable
- AMC - Anti-Moisture Connections
- 8W max. LED lamp / 35W max. halogen
- Weathered brass finish
- Composite stake with brass threaded insert
- Limited 10 year warranty

Light Distribution Cones:

LED-8W-CM6FL27K

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
4.3ft	81.8 fc	3.0 ft	3.1 ft
8.7ft	20.0 fc	6.2 ft	6.2 ft
13.0ft	8.95 fc	9.2 ft	9.2 ft
17.3ft	5.06 fc	12.3 ft	12.3 ft
21.7ft	3.21 fc	15.4 ft	15.4 ft
26.0ft	2.24 fc	18.4 ft	18.4 ft

■ Vert. Spread: 39.0°
■ Horiz. Spread: 39.1°

LED-8W-CM6FL30K

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
4.3ft	86.1 fc	3.0 ft	3.0 ft
8.7ft	21.0 fc	6.1 ft	6.0 ft
13.0ft	9.42 fc	9.1 ft	9.0 ft
17.3ft	5.32 fc	12.1 ft	12.0 ft
21.7ft	3.38 fc	15.2 ft	15.0 ft
26.0ft	2.35 fc	18.2 ft	18.0 ft

■ Vert. Spread: 38.5°
■ Horiz. Spread: 38.2°



c us

UL 2108:2004 R12.07
CSA C22.2.9.0-96 (R2006)

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.



Fixtures

Part Number

POSI-L427-WB

POSI-L430-WB

Description

POSITRON, BRASS, 12V, LED, 4W, 27K, 15/1', WB

POSITRON, BRASS, 12V, LED, 4W, 27K, 15/1', WB

Accessories

Part Number

PART-BZ

Description

Particle Dome Mounting Base

Finishes

Standard Finish

WB - Weathered Brass