
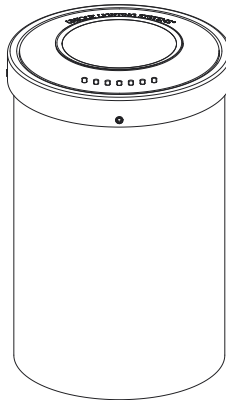
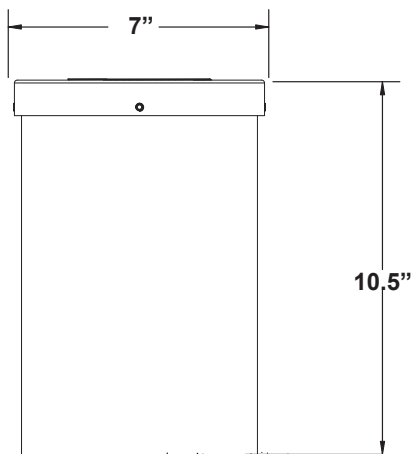


## PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #:	
LAMP(S):	
NOTES:	

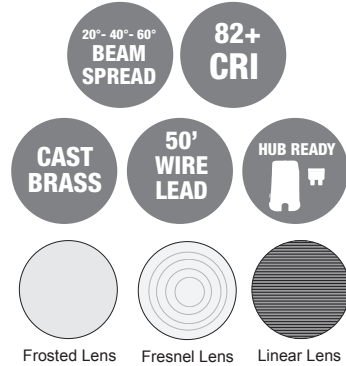

## Specifications:

- Cast brass and PBT construction
- High temperature gasket
- Vertical and horizontal beam adjustment
- Specification grade, beryllium copper socket
- Premium grade direct burial cable
- Potted connections
- Water tight tempered step glass lens
- 8W max. LED lamp / 50W max. halogen
- Weathered brass finish standard
- Limited lifetime warranty

## Light Distribution Cones

### LED-8W-CM6FL27K

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
4.3R	81.8 fc	3.0 ft	3.1 ft
8.7R	20.0 fc	6.2 ft	6.2 ft
13.0R	8.95 fc	9.2 ft	9.2 ft
17.3R	5.06 fc	12.3 ft	12.3 ft
21.7R	3.21 fc	15.4 ft	15.4 ft
26.0R	2.24 fc	18.4 ft	18.4 ft

■ Vert. Spread: 39.0°  
■ Horiz. Spread: 39.1°

### LED-8W-CM6FL30K

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
4.3ft	86.1 fc	3.0 ft	3.0 ft
8.7ft	21.0 fc	6.1 ft	6.0 ft
13.0ft	9.42 fc	9.1 ft	9.0 ft
17.3ft	5.32 fc	12.1 ft	12.0 ft
21.7ft	3.38 fc	15.2 ft	15.0 ft
26.0ft	2.35 fc	18.2 ft	18.0 ft


■ Vert. Spread: 38.5°  
■ Horiz. Spread: 38.2°

**NOTE:** Light cones are depicted without supplied lenses. Maximum wattage shown, for all other wattage options please refer to [uniquelighting.com/beamspreads](http://uniquelighting.com/beamspreads).



UL 2108:2004 R12.07  
CSA C22.2.9.0-96 (R2006)

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.



## Fixtures

### Part Number

### Description

SOLS-L427	SOLSTICE, BR, 12V LED, 4W 27K, 50' WL, W
SOLS-L427-P	SOLSTICE, BR, 12V LED, 4W 27K, 50' WL, P
SOLS-L430	SOLSTICE, BR, 12V LED, 4W 30K, 50' WL, W
SOLS-L430-P	SOLSTICE, BR, 12V LED, 4W 30K, 50' WL, P
SOLS-L527	SOLSTICE, BR, 12V LED, 5W 27K, 50' WL, W
SOLS-L527-P	SOLSTICE, BR, 12V LED, 5W 27K, 50' WL, P
SOLS-L530	SOLSTICE, BR, 12V LED, 5W 30K, 50' WL, W
SOLS-L530-P	SOLSTICE, BR, 12V LED, 5W 30K, 50' WL, P
SOLS-L827	SOLSTICE, BR, 12V LED, 8W 27K, 50' WL, W
SOLS-L827-P	SOLSTICE, BR, 12V LED, 8W 27K, 50' WL, P
SOLS-L830	SOLSTICE, BR, 12V LED, 8W 30K, 50' WL, W
SOLS-L830-P	SOLSTICE, BR, 12V LED, 8W 30K, 50' WL, P

## Accessories

### Part Number

N/A

### Description

## Finishes

### Standard Finish

WB - Weathered Brass

### Powder Coated Finishes

WH - White

BK - Black

VG - Verde Green

TT - Tucson Tan

TK - Titanium Knight

### Custom Colors

P - Painted

Stock powder coated colors displayed are subject to varying lead-times and will incur an additional cost. A Limited Warranty applies to all powder coated products.

Custom colors are available upon request. Please inquire about cost and lead times. Contact factory for custom colors and matching paint options.